

P11

INTERIOR

Pendant | For ceilings

● Dry location



Ordering Information

[Clear Form](#)

Date :	<input type="text"/>	Quantity :	<input type="text"/>
Project :	<input type="text"/>	Note :	<input type="text"/>
Type :	<input type="text"/>		<input type="text"/>

Specifications

Luminaire | Example Code: P11-C20-FR-2-C72-MC

Product	Canopy ¹	Shade	Size	Cord ²	Hardware Finish
P11		WH	6		
	C1		6 6-3/4" (171mm) tall	Cord:	MC matte chrome
	C3			C72 72" (1830mm)	BN brushed nickel
	C4			CX custom length	
	C20				
	C22				

System Components (Ordered Separately)

Remote Driver :

* Consult MP Lighting Website or Factory.

Important Notes

Specification

- See pg.3-5 - for different canopy options and its dimensions.
- 72" (1830mm) cord included. Consult factory for custom cord length.

Warranty Notes & Disclaimer

Malfunction and damage to product due to incompatible dimming system or misuse will not be covered under warranty. Consult MP Lighting for recommended drivers. If the fixture has an option to be installed with a dimming control system, consult a dimming system manufacturer with minimum load before installing. MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products. Consult MP Lighting website for most updated documentation.

P11

INTERIOR

Pendant | For ceilings

● Dry location

RoHS   



Application

Environment	Dry Location approved. IP 20.
Mounting	C1/C3/C4: Mounts to a 4" octagonal box using the mounting canopy C20: Recess mounts to a surface with coil spring clips C22: Threaded to a 4" octagonal box with the adapter & bracket

Electrical

Power Supplies	N/A
Control	N/A

Luminaire Construction

LED Light Source	12V lamp (not included) Recommended: MR16 or BI-PIN
Weight	N/A
Material	Fixture: Opalescent cased glass Hardware: machined marine-grade aluminum
Supplied with	Standard installation housing: Comes with a canopy, a universal crossbar, two screws (depending on selected canopy option), and an allen key. Cord: 72" (1830mm) cord. Consult factory for custom cord length.
Warranty & LED Life	5 years limited warranty Estimated useful life of LED is 50,000 hours.

Ordered Separately

System Components	Power supplies: remote driver Please consult factory or visit Recommended Drivers for available driver options.
-------------------	-------------------------------------------------------------------------------------------------------------------------------------------



Mounting Options & Dimensions

LED Fixture Dimensions (shown with C1 canopy)

Fixture

3D View

Beam

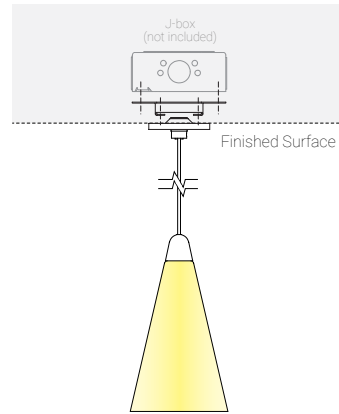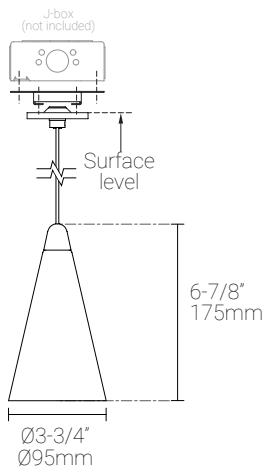

Canopy Images, Dimensions & Measurement of Custom Cord/Stem Length (X)

C1

C3

C4

C20

C22

