

# HLS

LED Hardwire Hardline Strip  
Cabinet, Cove & Display

Job Information		
Project Name		Type
Location		
Quantity		Date
Contact/Phone		
Notes		

## Features

### Housing

Durable extruded aluminum frame with frosted smooth lens. Suitable for dry and damp location applications. On-body on/off switch is provided for individual control.

### LED Driver

Fixture is provided with built-in silent non-flicker electronic LED DOB, 120V, 50/60Hz.

### Light Output

This accent light is available in 3000°K colour temperatures, providing up to 850 lumens, 51 lumens/watt.

### Dimming

Fixture is 100-10% dimmable with industry standard TRIAC, ELV and Incandescent dimmers.

### LED Characteristics

Powered by LED integrated strip that maintains uniform intensity with 70% lumens at 36,000 hours average life; with a CRI of 90.

### Beam Spread

The fixture lens provides for 110° beam spread.

### Linking

Complete with a joiner, these no shadow linking fixtures can be linked up to 360W in a single run.

### Mounting Kit

Hardware provided for mounting fixture to standard horizontal surfaces or vertical wall surface.

### Operating Temperature


-20°C~40°C (-4°F~104°F).

SPECIFICATION	
Application	Undercabinet
Approved Location	Dry / Damp
Beam Angle	110°
CCT	3000°K
Certification	cCSAus
Connection Type	3-Wire
CRI	90
Dimming	Yes
Dimming Technology	TRIAC / ELV / Incandescent
Lumens	Up to 850
Lumens per watt	Up to 51
Max. Operating Temp.	40°C (104°F)
Min. Start Temp.	-20°C (-4°F)
Lumen Maintenance	70% @ 50,000 hrs
Power Factor	>0.9
Rated Life	36,000 hrs
Voltage	120V
Warranty	3 Years
Wattage	Up to 18



## Description

This LED HL strip light is a linear light with an integrated LED strip and driver on board. Available with various lengths to meet any installation application.

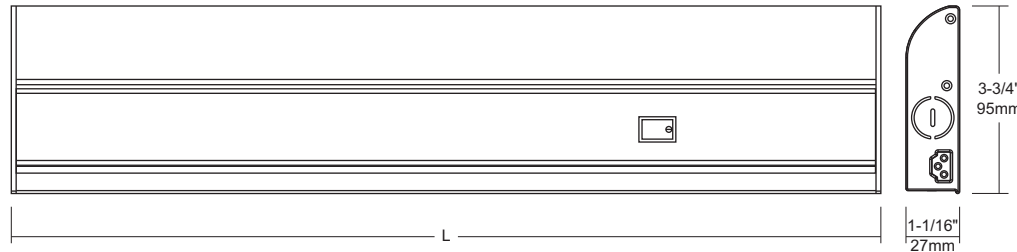

	HLS-9	HLS-12	HLS-18	HLS-21	HLS-24	HLS-36	HLS-48
Length (L)	9" 229mm	12" 305mm	18" 457mm	21" 533mm	24" 610mm	36" 914mm	48" 1219mm
Wattage (W)	3.5	4.5	6.8	7.9	9	12.4	18
Lumens	170	230	310	370	430	610	850



**Notes:** Accessories are sold separately. For additional options please consult your Liteline representative. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

## Ordering Guide

HLS -	Fixture Length	Colour Temperature	Body Finish
	<input type="text"/>	<input type="text"/>	<input type="text"/>
	9 : 9", 3.5W 12 : 12", 4.5W 18 : 18", 6.8W 21 : 21", 7.9W 24 : 24", 9W 36 : 36", 12.4W 48 : 48", 18W	30 : 3000°K	WH : White

## Accessories (Power feed required)



**ALFT6000-WH-3**  
6' Power cord for FluoroBar series.

