



4" & 6", RGB + Tunable White, Wi-Fi, 900-1525 Lumens, 12-16W

Recessed Downlighting

Job Information			
Project Name		Туре	
Location			
Quantity		Date	
Contact/Phone			
Notes			

Features

Body

Durable airtight aluminum body with UV stable diffuser lens for low glare. Includes silicone gasket for wet location applications. Includes White interchangeable magnetic trim.

LED Characteristics

This general application light fixture features a 12 watt (for 4") and 16 watt (for 6") LED module that maintains uniform intensity producing up to 1525 lumens; with a typical CRI of 90. RGB and Tunable White (2700 K ~ 5000 K).

Dimming

100%-1% Wi-Fi dimming capability. Dimming controlled via the WiZ App and Room Controller.

Beam Spread

The fixture lens provides 75° beam spread (for 4") and 80° beam spread (for 6").

Mounting

Includes two spring loaded clips to attached to any ceiling material.

LED Driver

Extruded aluminum hardwire box with 300mA (for 4") or 370mA (for 6") Wi-Fi dimmable LED driver with 100-135V AC input. Includes an 18" wire with 6-Pin DC connector between driver and fixture.


WiZ App

Can be controlled via the WiZ App (works with iOS and Android) from anywhere. Voice control can also be achieved by integrating the app with most smart speakers. Works with Google Assistant, Siri, Alexa and IFTTT.

Quick Connect push-in terminals

"Quick connect" push-in terminals in hardwire box for fast and easy wiring

Minimum Starting Temperature -40°C (-40°F)

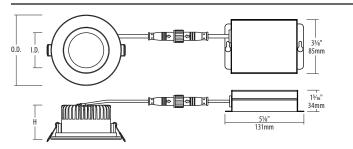

Size	0.D.	I.D.	Н
SLMB4	4¾" (121mm)	23/8" (60mm)	25/16" (59mm)
SLMB6	613/16" (173mm)	43/16" (106mm)	31/16" (78mm)


Environment

- · Suitable for wet locations.
- Approved for direct contact with insulation.
- Suitable for indoor/outdoor applications
- Airtight

QuickShip In-Stock

In-Stock products ship within two business days of an order being released.*

SPECIFICATION				
Application	Ceiling Recess Mount			
Approved Location	Wet / Insulated Ceilings /			
Approved Location	Indoor / Outdoor			
Beam Angle	75° / 80°			
CCT	RGB + Tunable White			
001	(2700 K - 5000 K)			
Certification	cETLus			
Class II	Yes			
Color	WH			
CRI	90			
Dimming	Yes			
Dimming Tech	Wi-Fi Dimming (via WiZ			
Dillilling recit	App)			
Hole Cut	4": Ø 41/4" (108mm)			
Hole Gut	6": Ø 61/4" (159mm)			
Input	100-135V AC, 60Hz			
Lumens	4": up to 900			
Luillella	6": up to 1525			
Lumens per Watt	Up to 95			
Power Factor	>0.9			
Projected Life	70% @ 50,000 hrs			
Warranty	3-Year			
Wattage	12W / 16W			



Description

SKYE OnCloud is a high-performance, easy to install residential and commercial grade downlight solution that offers good light output, energy-efficiency and streamlined design with interchangeable color trims. Suitable for wet locations.

SKYE Select dead-front trims available to provide a 2-tone professional trim and baffle finish.
























1 Not available for 6" size. 2 Not available with BK Trim Finish. 3 Not available with WH Trim Finish. 4 Not available for SLMB4S-RGBTW-BKBK. 5 Not available for SKYE SELECT models

* QuickShip lead time may vary for orders greater than 100 pieces. No additional shipment rates apply. Subject to availability. Accessories are sold separately. For additional options please consult your Liteline representative.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Ordering Guide

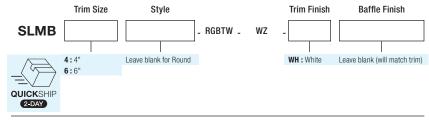

SKYESELECT Dead-front

Select from above Leave blank for Round S: Square1

I eave blank

BK: Black WH: White

BG: Gold BK: Black3

SP: Specular SS: Semi-Specular

WH: White2

Liteline Corporation Copyright © 2022 All rights reserved.

Telephone 416.996.1856 1.866.730.7704 Fax 905.709.5255 1.888.738.9736



Accessories



SLMB4-12W-RT-BK

Magnetic trim for 4" SKYE fixtures, round, black,



SLMB4-12W-RT-BN

Magnetic trim for 4" SKYE fixtures, round, brushed nickel.



SLMB4-12W-RT-OB

Magnetic trim for 4" SKYE fixtures, round, oil rubbed bronze.



P-4020

41/4" Round pre-mounting plate with driver attachment clip, for 4" SKYE fixtures.



SLM4P-XLRING-BK

Extra large trim ring for 4" SKYE, metal, black.



SLM4P-XLRING-BN

Extra large trim ring for 4" SKYE, metal, brushed nickel.



SLM4P-XLRING-WH

Extra large trim ring for 4" SKYE, metal, white.



SLMB6-16W-RT-BK

Magnetic trim for 6" SKYE fixtures, round, black,



SLMB6-16W-RT-BN

Magnetic trim for 6" SKYE fixtures, round, brushed nickel.



SLMB6-16W-RT-OB

Magnetic trim for 6" SKYE fixtures, round, oil rubbed bronze.



P-6020

61/4" Round pre-mounting plate with driver attachment clip, for 6" SKYE fixtures.



SLM6P-XLRING-BK

Extra large trim ring for 6" SKYE, metal, black.



SLM6P-XLRING-BN

Extra large trim ring for 6" SKYE, metal, brushed nickel.



SLM6P-XLRING-WH

Extra large trim ring for 6" SKYE, metal, white.



P-NCMK-1

Hanger bar kit. Includes hanger bars, brackets and screws.



Vapour barrier extender. For use in new construction applications.



VBE-2

Vapour barrier extender. For use in remodel applications.



VBE-3

Vapour barrier extender. For use in remodel applications.



VBF-5

Vapour barrier extender. For use in new construction applications.



LC-CRTL-SCENE-1

OnCloud Room Controller, Wi-Fi, ON/OFF, CCT, Dimming and favourite scenes.

SKYESELECT



SLMB4-12W-RT-BKBG

SKYE Select trim, 4", dead front, round. Black trim with Gold baffle.



SLMB4-12W-RT-BKBK

SKYE Select trim, 4", dead front, round. Black trim with Black baffle.



SLMB4-12W-RT-BKSP

SKYE Select trim, 4", dead front, round. Black trim with Specular baffle.



SLMB4-12W-RT-BKSS

SKYE Select trim, 4", dead front, round. Black trim with Semi-specular baffle.



SLMB4-12W-RT-WHBG

SKYE Select trim, 4", dead front, round. White trim with Gold baffle.



SLMB4-12W-RT-WHSP

SKYE Select trim, 4", dead front, round. White trim with Specular baffle.



SLMB4-12W-RT-WHSS

SKYE Select trim, 4", dead front, round. White trim with Semi-specular baffle.



SLMB4-12W-RT-WHWH

SKYE Select trim, 4", dead front, round. White trim with White baffle.



SLMB4-12W-ST-BKBG

SKYE Select trim, 4", dead front, square. Black trim with Gold baffle.



SLMB4-12W-ST-BKBK

SKYE Select trim, 4", dead front, square. Black trim with Black baffle.



SLMB4-12W-ST-BKSP

SKYE Select trim, 4", dead front, square. Black trim with Specular baffle.



SLMB4-12W-ST-BKSS

SKYE Select trim, 4", dead front, square. Black trim with Semi-specular baffle.



SLMB4-12W-ST-WHBG

SKYE Select trim, 4", dead front, square. White trim with Gold baffle.



SLMB4-12W-ST-WHSP

SKYE Select trim, 4", dead front, square. White trim with Specular baffle.



SLMB4-12W-ST-WHSS

SKYE Select trim, 4", dead front, square. White trim with Semi-specular baffle.



SLMB4-12W-ST-WHWH

SKYE Select trim, 4", dead front, square. White trim with White baffle.



SLMB6-16W-RT-BKBG

SKYE Select trim, 6", dead front, round. Black trim with Gold baffle.



SLMB6-16W-RT-BKBK

SKYE Select trim, 6", dead front, round. Black trim with Black baffle.



SLMB6-16W-RT-BKSP

SKYE Select trim, 6", dead front, round. Black trim with Specular baffle.



SLMB6-16W-RT-BKSS

SKYE Select trim, 6", dead front, round. Black trim with Semi-specular baffle.



SLMB6-16W-RT-WHBG

SKYE Select trim, 6", dead front, round. White trim with Gold baffle.



SLMB6-16W-RT-WHSP

SKYE Select trim, 6", dead front, round. White trim with Specular baffle.



SLMB6-16W-RT-WHSS

SKYE Select trim, 6", dead front, round. White trim with Semi-specular baffle.



SLMB6-16W-RT-WHWH

SKYE Select trim, 6", dead front, round. White trim with White baffle.