


APOLLO Vanity

3-525-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____

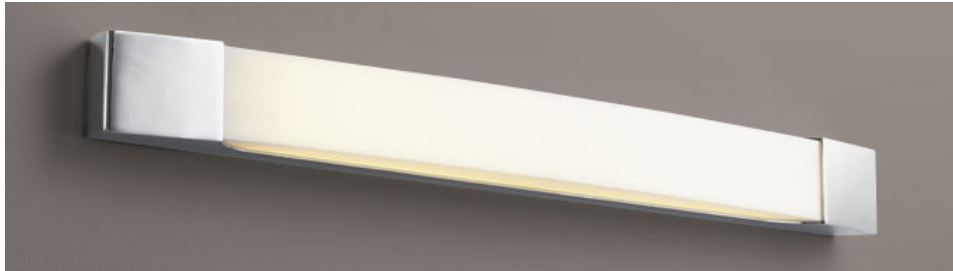

-14 Polished Chrome



Alternative position




-22 Oiled Bronze



-24 Satin Nickel

LIGHT SOURCE 2 x 12.1W LED, 3000K, CRI 90
LUMINAIRE POWER 28.9W at 120V
RATED LIFE 60000 hr RL
OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K
LUMEN OUTPUT Delivered: 1751 lm (LM-79)
INPUT VOLTAGE 120V to 277V AC, 50/60Hz
DRIVER OUTPUT 700mA, 29.4W max power
DIMMING TRIAC and ELV dimming at 120V AC;
 0-10V dimming, 100% to 1% current output
CONSTRUCTION Plated Steel and Acrylic
DIFFUSER - Matte White Acrylic
FINISHES Polished Chrome (-14), Oiled Bronze (-22),
 Satin Nickel (-24)
MOUNTING 4" Square J-Box* with a single device mud ring
 *Deep J-Box (Required to house driver)
STANDARDS UL Dry/Damp listed, ADA Compliant, CEC Title 24 Compliant,
 Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

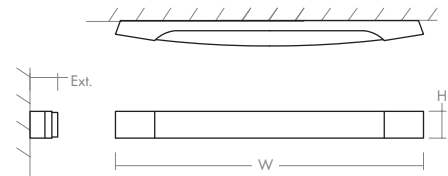

DIMENSIONS

W: 31.75"
H: 2.75"
Ext: 2.50"
M.C: 1.38" From top of fixture

Order example for standard fixture:

3-525-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-525-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

