

APOLLO Vanity
3-526-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
PROJECT _____ DATE _____



-14 Polished Chrome



Alternative position




-22 Oiled Bronze



-24 Satin Nickel

- LIGHT SOURCE** 2 x 11.7W LED, 3000K, CRI 90
- LUMINAIRE POWER** 28.0W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 2370 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 700mA, 29.4W max power
- DIMMING** TRIAC and ELV dimming at 120V AC;
0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Plated Steel and Acrylic
- DIFFUSER** - Matte White Acrylic
- FINISHES** Polished Chrome (-14), Oiled Bronze (-22),
Satin Nickel (-24)
- MOUNTING** 4" Square J-Box* with a single device mud ring
*Deep J-Box (Required to house driver)
- STANDARDS** UL Dry/Damp listed, ADA Compliant, CEC Title 24 Compliant,
Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

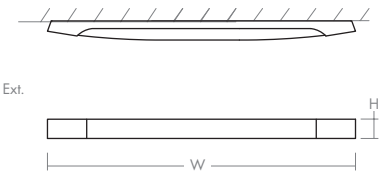

DIMENSIONS

- W:** 54.00"
- H:** 2.75"
- Ext:** 2.50"
- M.C:** 1.38" From top of fixture

Order example for standard fixture:
3-526-24 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V to 277V
Order example for optional color temperatures: **3-526-2724**
27: 2700K, 35: 3500K, 40: 4000K

