

# CHAMELEON Wall Sconce

## 3-514-xx

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
 PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-40 Aged Brass



-14 Polished Chrome




-24 Satin Nickel



-22 Oiled Bronze

**LIGHT SOURCE** 1 x 10.1W LED, 3000K, CRI 90  
**LUMINAIRE POWER** 12.3W at 120V  
**RATED LIFE** 60000 hr RL  
**OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K  
**LUMEN OUTPUT** Delivered: 832 lm (LM-79)  
**INPUT VOLTAGE** 120V to 277V AC, 50/60Hz  
**DRIVER OUTPUT** 350mA, 14.7W max power  
**DIMMING** TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output  
**CONSTRUCTION** Plated Steel and Acrylic  
**DIFFUSER** - Matte White Acrylic  
**FINISHES** Polished Chrome (-14), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)  
**MOUNTING** 4" Octagonal J-Box\*  
 \*Deep J-Box (Required to house driver)  
**STANDARDS** UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

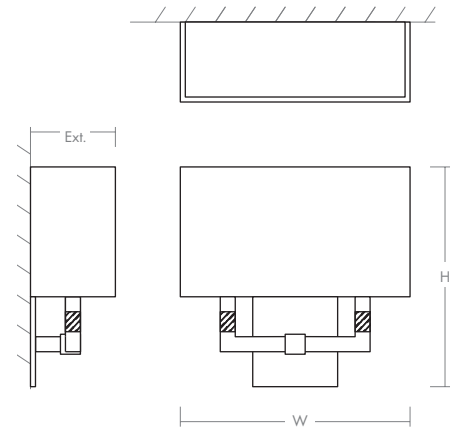

**DIMENSIONS**  
**W:** 11.75"  
**H:** 11.50"  
**Ext:** 4.00"  
**M.C:** 4.19" From top of fixture

Order example for standard fixture:  
**3-514-24** (x- Voltage - xxx-Sequence # - xx-Finish)  
 3: 120V to 277V  
 Order example for optional color temperatures: **3-514-2724**  
 27: 2700K, 35: 3500K, 40: 4000K

