




SPS-0112 REV B

AERO SERIES

JOB NAME: _____ FIXTURE TYPE: _____



BLE - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

A B C D E F G

_____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

H I J K

Order Example: BLE - G - SBA16 - 300 - G15 - 975 - NA - WGG - 975 - FST - NA - E26

A - MOUNTING STYLE

| | |
|-----------|--------------------------|
| C | Cord Hung |
| CN | Chain Hung |
| F | Flush Mount ¹ |
| G | Gooseneck |
| S | Stem Mount |

B - SHADE SIZE**AERO:**

| | |
|--------------|-----------|
| SBA12 | 12" Shade |
| SBA14 | 14" Shade |
| SBA16 | 16" Shade |

C - SHADE FINISH**PORCELAIN FINISHES²:**

| | |
|------------|-----------------|
| 150 | Black |
| 250 | White |
| 350 | Vintage Green |
| 355 | Jadite |
| 455 | Cherry Red |
| 550 | Yellow |
| 650 | Bronze |
| 750 | Cobalt Blue |
| 765 | Delphite Blue |
| 850 | Graphite |
| 950 | Metallic Chrome |

POWDER COAT FINISHES³:

| | |
|------------|-------------------|
| 100 | Black |
| 105 | Textured Black |
| 106 | Matte Black |
| 200 | White |
| 206 | Matte White |
| 300 | Dark Green |
| 307 | Emerald Green |
| 311 | Jadite |
| 370 | Mint |
| 380 | Chartreuse |
| 390 | Teal |
| 400 | Barn Red |
| 420 | Orange |
| 470 | Watermelon |
| 480 | Blush Pink |
| 490 | Magenta |
| 495 | Sherbet Orange |
| 500 | Buttery Yellow |
| 570 | Sunflower |
| 600 | Bronze |
| 601 | Chocolate |
| 605 | Rust |
| 615 | Oil-Rubbed Bronze |

C - SHADE FINISH (CONTINUED)**POWDER COAT FINISHES³:**

| | |
|------------|------------------|
| 700 | Royal Blue |
| 705 | Navy |
| 710 | Cobalt Blue |
| 715 | Delphite Blue |
| 790 | Lavender |
| 800 | Industrial Grey |
| 805 | Charcoal Granite |
| 810 | Graphite |
| 975 | Galvanized |

NATURAL METALS⁴:

| | |
|------------|-------------------|
| 995 | Raw Copper |
| 996 | Weathered Copper |
| 997 | Raw Brass |
| 998 | Weathered Brass |
| 999 | Oil-Rubbed Copper |

D - MOUNTINGPlease Note: If Flush Mount [F] is selected in Section A, please select **NA**

| | |
|-----------|----------------|
| NA | Not Applicable |
|-----------|----------------|

CSA LISTED CORD OPTIONS:

| | |
|-------------|---------------------|
| SBK | Standard Black |
| SWH | Standard White |
| CMG | Grey Cotton |
| CRZ | Red Chevron |
| CSB | Black Cloth |
| CSW | White Cloth |
| CSR | Red Cloth |
| CSBB | Black & Brown Cloth |
| CSRW | Red & White Cloth |
| CSGW | Gold & White Cloth |
| CSBG | Black & Gold Cloth |
| CSBW | Black & White Cloth |
| CSBP | Black & Pink Cloth |
| CSUW | Blue & White Cloth |

NON-CSA LISTED CORD OPTIONS⁵:

| | |
|------------|---------------------|
| TBK | Black Cotton Twist |
| TWH | White Cotton Twist |
| TBR | Brown Cotton Twist |
| TRD | Red Cotton Twist |
| TPT | Putty Cotton Twist |
| TBW | Black & White Twist |
| TRW | Red & White Twist |
| TBB | Brown & Beige Twist |

D - MOUNTING (CONTINUED)**CHAIN MOUNT OPTIONS⁶:**

| | |
|-------------|-------------|
| CN36 | 3' of Chain |
| CN48 | 4' of Chain |
| CN60 | 5' of Chain |
| CN72 | 6' of Chain |

GOOSENECK OPTIONS:

| | |
|-------------------------|------------------------|
| G1⁶ | G16⁶ |
| G2⁶ | G17 |
| G3^{6,7} | G19⁶ |
| G4⁷ | G22 |
| G5⁶ | G24 |
| G6 | G25 |
| G7 | G26⁶ |
| G8 | G32 |
| G9 | G34⁶ |
| G10 | G35⁶ |
| G11⁶ | G36⁶ |
| G12⁶ | G40⁶ |
| G13 | G64⁶ |
| G14 | G65⁶ |
| G15 | |

STEM MOUNT OPTIONS:

| | |
|--------------|----------------------------------|
| ST506 | .5" Stem Mount, 6" ⁶ |
| ST512 | .5" Stem Mount, 12" ⁶ |
| ST518 | .5" Stem Mount, 18" ⁶ |
| ST524 | .5" Stem Mount, 24" ⁶ |
| ST536 | .5" Stem Mount, 36" ⁶ |
| ST548 | .5" Stem Mount, 48" ⁶ |
| ST706 | .75" Stem Mount, 6" |
| ST712 | .75" Stem Mount, 12" |
| ST718 | .75" Stem Mount, 18" |
| ST724 | .75" Stem Mount, 24" |
| ST736 | .75" Stem Mount, 36" |
| ST748 | .75" Stem Mount, 48" |

E - MOUNTING FINISH

Please Note: See Section C for Finish Options. 980-Brushed Aluminum is also available for Gooseneck (except G36, G40, G64 & G65) and Stem mounting styles. If Porcelain Finish is selected, mounting will be powder coat painted-to-match.

(I) If Cord Hung [C] or Flush Mount [F]⁶ Mounting Style, selection identifies canopy finish
(II) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish
(III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish

| | |
|------------|------------------|
| 980 | Brushed Aluminum |
|------------|------------------|

F - CORDS⁸

Please Note: See Section D for all applicable CSA Cord Options for Chain Hung Mounting Style

| | |
|-----------|----------------|
| NA | Not Applicable |
|-----------|----------------|

G - SHADE ACCESSORIES⁶

| | |
|------------|-------------------------------------|
| NA | None |
| WC | Wire Cage ¹⁰ |
| ACR | Acrylic Diffuser ^{9,10,11} |
| TGG | Heavy Duty Guard |
| CGG | Cast Guard |
| WGG | Wire Guard |

H - SHADE ACCESSORY FINISH

Please Note: See Section C for Finish Options. Natural Metals not applicable. If Porcelain Finish is selected, accessory will be powder coat painted-to-match

| | |
|-----------|----------------|
| NA | Not Applicable |
|-----------|----------------|

I - GLASS OPTION¹²

| | |
|------------|----------------|
| NA | Not Applicable |
| CLR | Clear Glass |
| FST | Frosted Glass |
| RIB | Ribbed Glass |
| BLU | Blue Glass |
| RED | Red Glass |
| AMB | Amber Glass |
| GRN | Green Glass |

J - MOUNTING ACCESSORY

| | |
|--------------|---|
| NA | None/Not Applicable |
| HSC | Hang Straight Canopy ^{6,13} |
| HDSMC | Heavy Duty Stem Mount Canopy ^{6,13} |
| HDBP | Heavy Duty Backing Plate ^{6,14,15} |
| DD | Dusk-to-Dawn Photocell ^{14,15} |
| DBPC | Decorative Backing Plate Cover ^{14,15} |
| DCHX | Decorative Backing Plate Cover & Hex Cover ^{14,15} |


K - LIGHT SOURCE

| | |
|-------------|-----------------------------|
| E26 | 200 Watt Max |
| GU24 | 23 Watt Max ^{1,16} |


IMPORTANT: (1) Not available with Acrylic Diffuser accessory (2) All Porcelain Enamel finished shades feature a white interior and a black outer rim (3) All Powder Coat finished shades, Galvanized excluded, feature a white interior (4) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals (5) Not available with Chain Hung option (CN) (6) Not available in Natural Metals (7) Not compatible with 16" shade (8) Only applicable if Chain Hung Mounting Style selected in Section A, select NA if another Mounting Style is selected (9) Acrylic Diffuser accessory reduces incandescent wattage to 40W Max for the 12" shade size and 60W Max for the 14" and 16" shade size (10) Not available with the Guard & Glass Accessory (11) Fixture is UL Listed for Damp Locations with Acrylic Diffuser (12) Guard and Glass accessory reduces incandescent wattage to 100W Max and GU24 Bi-Pin to 18W Max (13) Only applicable if Stem Mounting Style is selected in Section A (14) Only applicable if Gooseneck Mounting Style is chosen (15) Not available for G19, G36 & G40 (16) Fixtures configured with GU24 are non-returnable

MOUNTING STYLE


CHAIN HUNG PENDANT (CN)

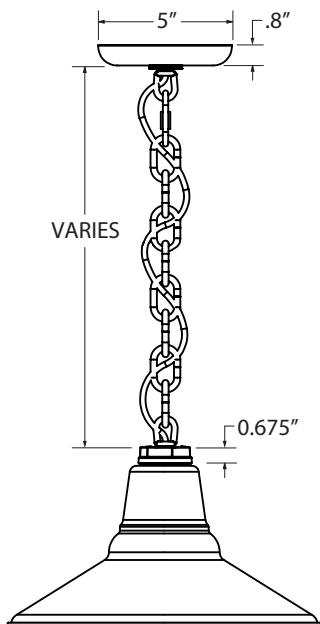


FLUSH MOUNT (F)

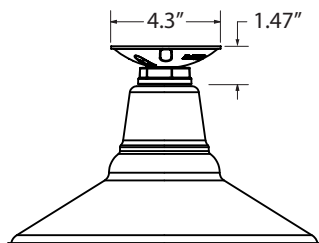


STEM MOUNT PENDANT (S)

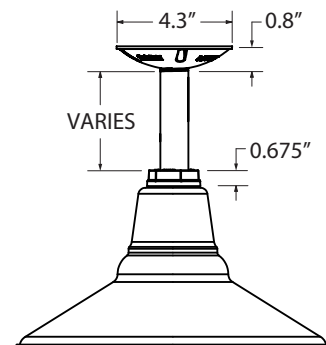

CORD HUNG PENDANT (C)

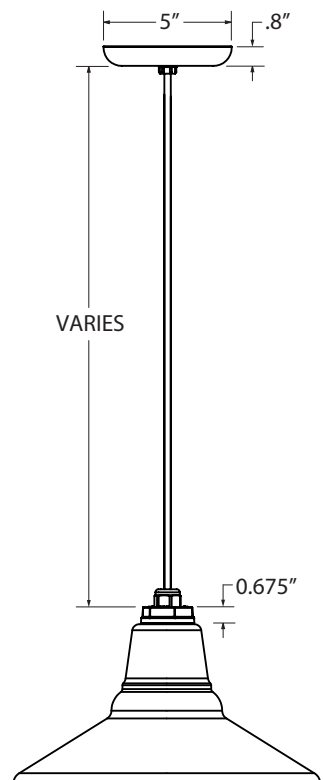


GOOSENECK (G)

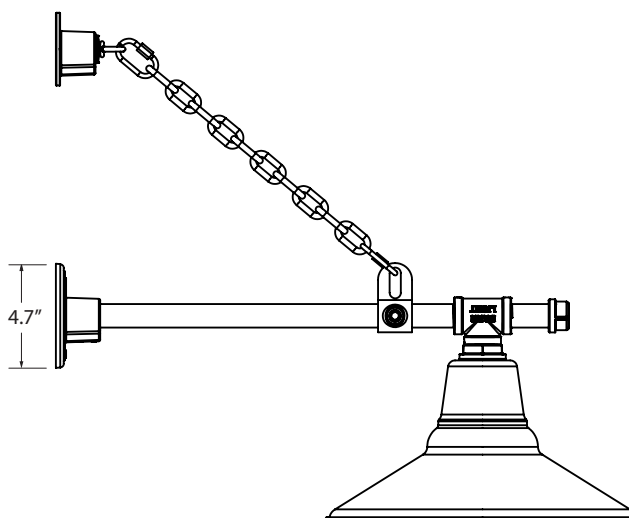

SHOWN WITH: G64 GOOSENECK ARM

LUMINAIRE DIMENSIONS

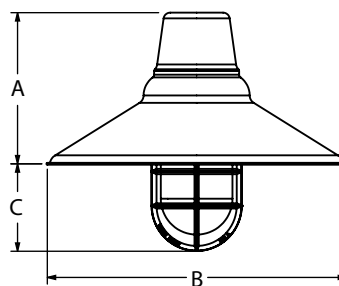

SHOWN WITH: OPTIONAL GUARD & GLASS ACCESSORY

| SHADE CODE | HEIGHT (A) | DIAMETER (B) | EXTENSION (C) |
|------------|------------|--------------|---------------|
| SBA12 | 6.25" | 12" | 4.8" |
| SBA14 | 7" | 14" | 4" |
| SBA16 | 7.75" | 16" | 3.3" |

SPECIFICATIONS**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

Includes All Gooseneck, Stem and Flush Mounting Styles
ACR UL Listed for Damp Locations for Gooseneck and Stem
Mounting Styles

CSA LISTED FOR DAMP LOCATIONS

Includes All Chain and Select Cord Hung Mounting Styles
ACR UL Listed for Damp Locations

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See
Our Terms & Conditions

UL CERTIFICATION

UL Listed Fixtures Available upon Request. Please Consult Factory
for Additional Information.

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC, 200 Watt Max

COMPACT FLUORESCENT

Bi-Pin Base GU24 Socket, 120 VAC, 23 Watt Max

CONSTRUCTION & FINISH

POWDER COAT SHADE

Hand-Spun from High Purity 3003-O Temper Aluminum

PORCELAIN SHADE

Hand-Spun from 20 Gauge Porcelain Steel

GALVANIZE SHADE

Hand Spun from High Quality Galvanized Steel

COPPER

Hand-Spun from High Purity C11000-O60 ETP Copper

BRASS

Hand-Spun from High Purity C2600-O60 Brass

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and
Thermocured

PORCELAIN FINISHES

Applied by Hand and Fired in a High Temperature Oven

STEM

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
6063 Aluminum Mounting Stem. Custom Lengths Available upon
Request.

GOOSENECK

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
6063 Aluminum Gooseneck

CORD

Cord-Hung Pendants Include 7' of Standard Cord or 5' of Cotton or
Cloth Cord, +/- For Socket Orientation

CHAIN

4-Gauge Chain Complete with Quick Link for On-Site Adjustments
to Chain's Length