



REV 01.15.20

AERO INDUSTRIAL GUARD POST MOUNT

BARN LIGHT DOCK LIGHTING COLLECTION

Max Weight: 10.0 lbs

PROJECT NAME _____

PROJECT TYPE _____

SPS-0246

BLE - PMS - TGG - _____ - _____ - _____ - _____ - _____ - _____ - _____

A B C D E F

G

Order Example: BLE - PMS - TGG - SBA14 - 600 - RIB - PMDBF10 - 100 - GU24 - NA

A - SHADE SIZE

AERO SHADE:

- SBA12** 12" Shade
- SBA14** 14" Shade

B - FINISHES

POWDER COAT FINISHES:

- 100** Black
- 105** Textured Black
- 200** White
- 300** Dark Green
- 307** Emerald Green
- 311** Jadite
- 370** Mint
- 380** Chartreuse
- 390** Teal
- 400** Barn Red
- 420** Orange
- 470** Watermelon
- 480** Blush Pink
- 490** Magenta
- 500** Buttery Yellow
- 570** Sunflower
- 600** Bronze
- 601** Chocolate
- 605** Rust
- 615** Oil-Rubbed Bronze
- 700** Royal Blue
- 705** Navy
- 710** Cobalt Blue
- 715** Delphite Blue
- 800** Industrial Grey
- 805** Charcoal Granite
- 810** Graphite
- 975** Galvanized

C - GLASS OPTIONS

- CLR** Clear Glass'
- FST** Frosted Glass
- RIB** Ribbed Glass
- CCR** Clear Crackle Glass
- SMK** Smoke Crackle Glass
- HCR** Honey Crackle Glass

F - LIGHT SOURCE

- E26** 100 Watt Max
- GU24** 24 Bi-Pin CFL, 18W Max
- LED16.8** 1600 Lumen, 16W LED

D - DIRECT BURIAL POLE

- NA** None
- PMDBSP8** 8' Smooth Pole
- PMDBFP8** 8' Fluted Pole
- PMDBS10** 10' Smooth Pole
- PMDBF10** 10' Fluted Pole
- PMDBS12** 12' Smooth Pole
- PMDBF12** 12' Fluted Pole

G - COLOR TEMPERATURE²


- NA** Not Applicable
- 2700K** 2700K, Warm White
- 3000K** 3000K, Neutral White
- 3500K** 3500K, Bright White
- 4000K** 4000K, Cool White

E - DIRECT BURIAL POLE FINISH

- NA** Not Applicable
- 100** Black
- 200** White
- 975** Galvanized

IMPORTANT: (1) Clear Glass not recommended if LED Light Source is selected in Section F (2) Only applicable if an LED Light Source is selected in Section F, select NA if another light source is selected


DIMENSIONAL DRAWING

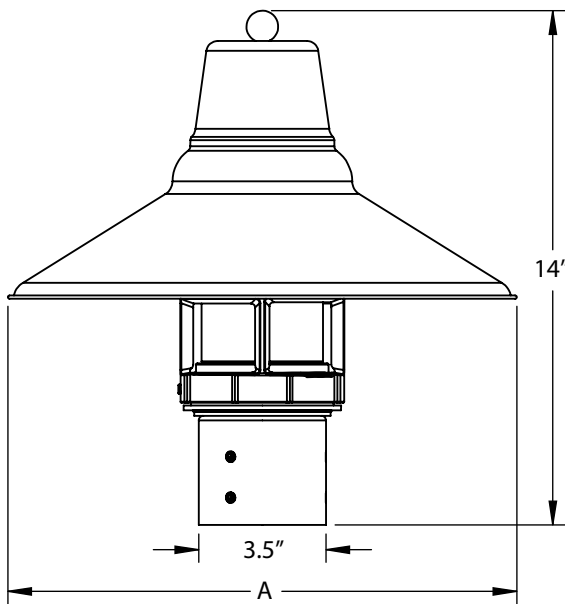

SHADE CODE	DIAMETER (A)
SBA12 (12" Shade)	12"
SBA14 (14" Shade)	14"

DIRECT BURIAL POLE

The optional Direct Burial Pole lets the Industrial Guard Post Mounts spread their unique style across an entire residential or commercial property. Made from durable aluminum, two pole styles — smooth and fluted — are available for this fixture.

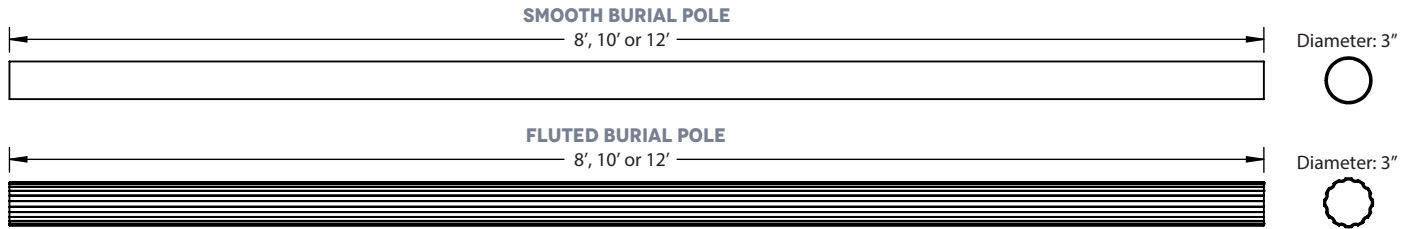

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
INCANDESCENT (MED E26)					
E26	100W Max	1600*	100*	120 VAC	Bulb Dependant
COMPACT FLOURESCENT (GU24 CFL)					
GU24	18W Max	1100*	75*	120 VAC	Bulb Dependant
LED					
LED16.8	16W	1600	>90	120 VAC	TRIAC

SPECIFICATIONS

CONSTRUCTION

DIRECT BURIAL POLE
Optional Smooth Pole (12 Guage Galvanized Steel) or Fluted Pole (Schedule 40 Aluminum)

LED SPECIFICATIONS

LUMEN MAINTENANCE
LED16.8 Source is L90(11K) > 61,000 Hours.

COLOR TEMPERATURES
Standard color temperatures available include 2700K, 3000K, 3500K and 4000K. Custom temperatures available upon request.

CRI
Minimum 90 CRI. Consult factory for other CRI options.

EFFICACY
Up to 100 LPW based on wattage/lumens in the table.

DRIVER & DIMMING OPTION
Relient on Triac Dimming 16W / 120V integrated driver, down to 1% dimming.
Requires compatible dimming switch.

SHADE & FINISH

AERO SHADE
Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES
Polyester Powder Coat Finishes are Electro-Staticly Applied and Thermocured

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

LIMITED WARRANTY
For Additional Information on our Limited Warranty, Please See Our Terms & Conditions