




SPS-294 REV B

**AUSTIN LED WALL SCNCE**

JOB NAME: \_\_\_\_\_ FIXTURE TYPE: \_\_\_\_\_



BLE - W - WHA10 -

A

B

C

D

E

F

G

Order Example: BLE - W - WHA10 - 300 - WC - 975 - LED16 - 3000K - DL - NA

**A - SHADE FINISH****POWDER COAT FINISHES<sup>1</sup>:**

100	Black
105	Textured Black
106	Matte Black
200	White
206	Matte White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
495	Sherbet Orange
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue
705	Navy
710	Cobalt Blue
715	Delphite Blue
790	Lavender
800	Industrial Grey
805	Charcoal Granite

**A - SHADE FINISH (CONTINUED)****POWDER COAT FINISHES<sup>1</sup>:**

810	Graphite
975	Galvanized

**B - SHADE ACCESSORY**

NA	None
WC	Wire Cage
ACR	Acrylic Diffuser <sup>2,3</sup>

**C - SHADE ACCESSORY FINISH**

Please Note: See **Section A** for all wire cage finish options. If no wire cage is selected in Section B, please select NA.

NA	Not Applicable
----	----------------

**D - LUMENS**

LED11	850 Lumen, 11W LED
LED16	1250 Lumen, 16W LED

**E - COLOR TEMPERATURE**

2700K	Warm White
3000K	Neutral White
3500K	Bright White
4000K	Cool White


**F - LED LENS**

DL	Domed Lens
FL	Flat Lens

**G - DUSK-TO-DAWN PHOTOCELL**

NA	None/Not Applicable
DD	Dusk-to-Dawn Photocell

**IMPORTANT:** (1) All Powder Coat finished shades, with the exception of 975-Galvanized, feature a white interior (2) Selecting Acrylic Diffuser will reduce the amount of lumens and LPW delivered (3) Fixture to be CSA Listed for Damp Location

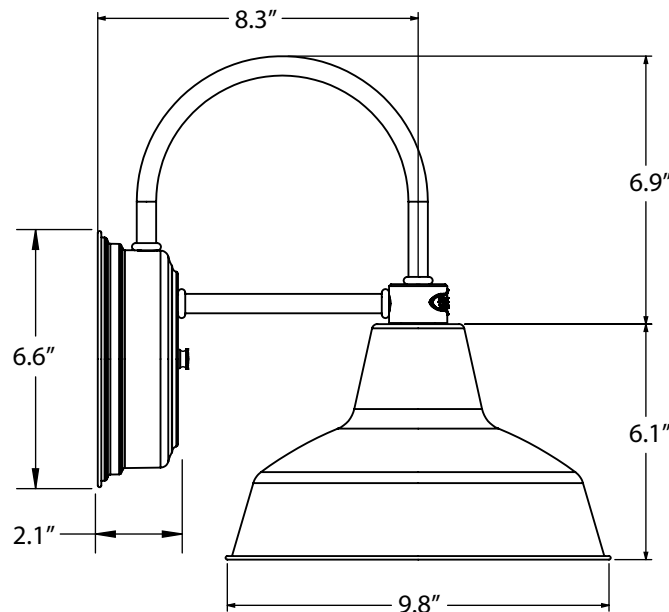**MOUNTING DIMENSIONS**

**SPECIFICATIONS****CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA  
 Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility  
 Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS  
 If the Acrylic Diffuser is Chosen, the Fixture will be CSA Listed for  
 Damp Locations

LIMITED WARRANTY  
 For Additional Information on Our Limited Warranty, Please See  
 Our Terms & Conditions

OPERATING TEMPERATURE  
 -30°C to 40°C

**CONSTRUCTION & FINISH**

POWDER COAT SHADE  
 Hand-Spun from High Purity 3003-O Temper Aluminum

GALVANIZE SHADE  
 Hand Spun from High Quality Galvanized Steel

POWDER COAT FINISHES  
 Polyester Powder Coat Finishes Are Electro-Statically Applied and  
 Thermocured

BACKING PLATE  
 Hand-Spun from High Purity 3003-O Temper Aluminum or  
 High Quality Galvanized Steel if 975 Finish is Chosen

WALL SCONCE ARM  
 1/4" Nominal (0.50" Actual) Brass Electroplated Steel Tubing  
 Mounting Arm

MAX FIXTURE WEIGHT  
 10 lbs

**LED LIGHT SOURCE**

LED TYPE: CREE LMH2 MODULE

INITIAL LUMENS DELIVERED: UP TO 1250 LUMENS

L90(6K) > 36,300 HOURS

AVAILABLE CCT: 2700K, 3000K, 3500K, 4000K  
 Custom Temperatures Available upon Request

90+ CRI

2 STEP MACADAMS ELLIPSE

EFFICACY: UP TO 78 LPW  
 High Efficacy Available upon Request, Consult Factory for  
 Additional Information

**ELECTRICAL/LED DRIVER**

DRIVER TYPE: ERP ESS/T

POWER FACTOR > 0.9

EFFICIENCY: UP TO 87% TYPICAL

INPUT VOLTAGE: 120-277 VAC (SEE DIMMING SECTION)

CLASS 2 POWER SUPPLY

LED DRIVER LIFETIME: > 100,000 HOURS (@ 25 DEG C AMBIENT)

IP64 MINIMUM RATING CASE WITH SILICONE-BASED POTTING

PROTECTIONS

Output Open Load, Over-Current and Short-Circuit (Hiccup), and  
 Over-Temperature with Auto Recovery

CONDUCTED AND RADIATED EMI

Compliant with FCC CFR Title 47 Part 15 Class B (120 VAC), Class A  
 (277 VAC) and EN55015 (CISPR 15) at 220, 230 and 240 VAC

COMPLIANT WITH

Complies with Energy Star® DLR (DesignLight Consortium®) and CA  
 Title 24 Technical Requirements

**DIMMING**

TRI-MODE DIMMING™

Compatible with TRIAC (Forward-Phase or Leading-Edge), ELV  
 (Reverse-Phase or Trailing-Edge) and 0-10 V Dimmers

TRIAC AND ELV DIMMING ONLY AT 120 VAC

DIMMING RANGE 1-100%

The Dimming Range is Dependent on Each Specific Dimmer. May  
 not be able to Achieve 1% Dimming with Some Dimmers

ELV DIMMING AT 230 VAC  
 Available by Request