Y
Α.
- 1
- //
- //

BLE - L - FL004 -		-	-
	A	В	С

Order Example: BLE - L - FL004 - 800 - 997 - CSGW

A - SHADE/BASE FINISH

POWDER COAT FINISHES1:

100 Black

105 **Textured Black**

106 Matte Black

200 White

206 Matte White

300 Dark Green

307 **Emerald Green**

311 **Jadite** 370 Mint

380

Chartreuse 390 Teal

400 Barn Red

420 Orange

470 Watermelon 480 Blush Pink

490 Magenta

495 **Sherbet Orange**

500 **Buttery Yellow**

570 Sunflower

600 Bronze

601 Chocolate

605 Rust

615 Oil-Rubbed Bronze

700 **Royal Blue**

705 Navy

710 **Cobalt Blue**

715 Delphite Blue

790 Lavender

800 **Industrial Grey** 805 **Charcoal Granite**

810 Graphite 975 Galvanized

B - STEM FINISH

975 Galvanized 997 Raw Brass

C - CORDS²

CSA LISTED CORD OPTIONS:

SBK Standard Black SWH Standard White Black Cloth CSB **CSW** White Cloth CSR Red Cloth

CSBB Black & Brown Cloth CSRW Red & White Cloth CSGW Gold & White Cloth


CSBG Black & Gold Cloth **CSBW** Black & White Cloth CSBP Black & Pink Cloth CSUW Blue & White Cloth

CRZ Red Chevron Cord

CMG **Grey Cotton Cord**

LUMINAIRE DIMENSIONS

FIXTURE TYPE:

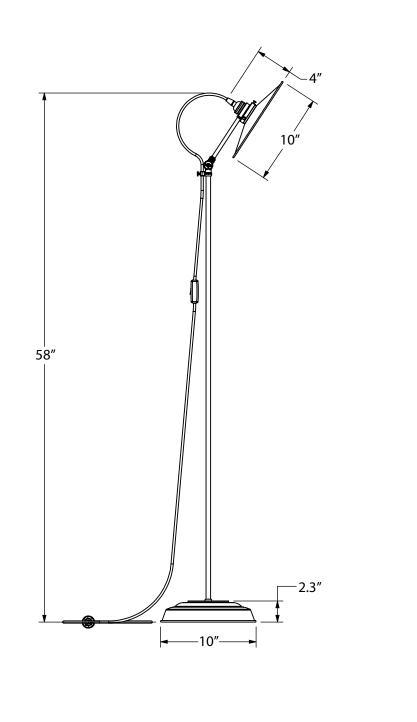

IMPORTANT: (1) All Powder Coat finished shades, excluding 975-Galvanized, feature a white interior (2) SWH-Standard White Cord and CSW-White Cloth Cord include a white plug and switch, all othe cord options will include a black plug and switch

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR DRY LOCATIONS

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

CONSTRUCTION & FINISH

POWDER COAT SHADE

Hand Spun from High Purity 3003-O Temper Aluminum

GALVANIZED SHADE

Hand Spun from High Quality Galvanized Steel

POWDER COAT FINISHES

Polyester Powder Coat Finishes are Electro-Statically Applied and Thermocured

CAST IRON WEIGHTED BOTTOM

Features a Cast Iron Weighted Bottom to Prevent Tipping

CORD & PLUG

Complete with 8 Feet of Cord, 2-Prong Polarized Plug and Inline On/Off Switch

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC, 60W Max