

Order Example: BLE - C - FCC12 - 999 - SBK - 200 - NA - NA - E26

FIXTURE TYPE:

BLE -		-				-	-
	A	В	С	D	E	F	G
	Н	_					

A - MOUNTING STYLE

С	Cord Hung
CN	Chain Hung
F	Flush Mount
G	Gooseneck
S	Stem Mount

B - SHADE SIZE

CONOCO: FCC10 FCC12 FCC15

C - SHADE FINISH

PORCELAIN FINISHES3:

150	Black
250	White
350	Vintage Green
355	Jadite
455	Cherry Red
550	Yellow
650	Bronze
750	Cobalt Blue
765	Delphite Blue
850	Graphite
950	Metallic Chrome

850	Grapnite
950	Metallic Chrome
POWDER	COAT FINISHES4
100	Black
105	Textured Black
200	White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
495	Sherbet Orange
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue

C - SHADE FINISH (CONTINUED)

POWDER	COAT FINISHES⁴:
705	Navy
710	Cobalt Blue
715	Delphite Blue
790	Lavender
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized
NATURAL	METALS ² :
995	Raw Copper
996	Weathered Copper
997	Raw Brass
998	Weathered Brass
999	Oil-Rubbed Copper

D - MOUNTING

CSA LISTED CORD OPTIONS:

NON-CSA LISTED CORD **OPTIONS:**

1 110110	•
CBK	Black Cotton
TBK	Black Cotton Twist
TWH	White Cotton Twist
TBR	Brown Cotton Twist
TRD	Red Cotton Twist
TPT	Putty Cotton Twist
TBW	Black & White Twist
TRW	Red & White Twist
TBB	Brown & Beige Twist

CHAIN MOUNT OPTIONS:

I IMIII I'I	CONT OF HONS.
CN36	3' of Chain1
CN48	4' of Chain1
CN60	5' of Chain1
CN72	6' of Chain1

D - MOUNTING (CONTINUED)

FLUSH	MOUNT	OPTIONS:
FM ¹		
GOOSE	NECK O	PTIONS.

UUSENECK	OPITON
G1 ¹	G16 ¹
G2 ¹	G17
G3 ¹	G191
G4	G22
G5 ¹	G24
G6	G25
G7	G26 ¹
G8	G32
G9	G341
G10	G351
G11 ¹	G36 ¹
G121	G401
G13	G641
G14	G651
G15	

STEM MOUNT OPTIONS:

ST506	.5" Stem Mount, 6"1
ST512	.5" Stem Mount, 12"1
ST518	.5" Stem Mount, 18"1
ST524	.5" Stem Mount, 24"1
ST536	.5" Stem Mount, 36"1
ST548	.5" Stem Mount, 48"1
ST706	.75" Stem Mount, 6"
ST712	.75" Stem Mount, 12"
ST718	.75" Stem Mount, 18"
ST724	.75" Stem Mount, 24"
ST736	.75" Stem Mount, 36"
ST748	.75" Stem Mount, 48"

E - MOUNTING FINISH

Please Note: See $\bf Section \ C$ for Finish Options. 980-Brushed Aluminum is also available for Gooseneck and Stem mounting styles. If Porcelain Finish is selected, mounting will be powder coat painted-to-match. (I) If Cord Hung [C] or Flush Mount [F]

Mounting Style, selection identifies canopy finish (II) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish (III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish

980 **Brushed Aluminum**

F - CORDS⁵

Please Note: See **Section D** for all applicable CSA and Non-CSA Listed Cord Options for Chain Hung Mounting Style

Not Applicable

G - MOUNTING ACCESSORY

NA HSC	None/Not Applicable Hang Straight Canopy ^{1,6}
HDSMC	Heavy Duty Stem Mount
	Canopy ^{1,6}
HDBP	Heavy Duty Backing Plate ¹
DD	Dusk-to-Dawn Photocell
DBPC	Decorative Backing Plate
	Cover
DCHX	Decorative Backing Plate Cover & Hex Cover


H - LIGHT SOURCE

E26	200 Watt Max
GU24	23 Watt Max


IMPORTANT: (1) Not available in Natural Metals (2) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals (3) All Porcelain Enamel finished shades feature a white interior and a black outer rim (4) All Powder Coat finished shades, Galvanized excluded, feature a white interior (5) Only applicable if Chain Hung Mounting Style selected in Section A, select NA if another Mounting Style is selected (6) Only applicable if Stem Mounting Style is selected in Section A

MOUNTING STYLE


CHAIN HUNG PENDANT (CN)




FLUSH MOUNT (F)




STEM MOUNT PENDANT (S)




GOOSENECK (G)



CORD HUNG PENDANT (C)

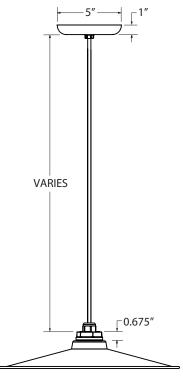

LUMINAIRE DIMENSIONS



SHADE CODE	HEIGHT (A)	DIAMETER (B)
FCC10	1.75″	10"
FCC12	1.75″	12"
FCC15	2.25"	15"

BARN LIGHT ELECTRIC CO. CONOCO SERIES SPS-0151 REV A

SPECIFICATIONS

MOUNTING

STEM

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

GOOSENECK

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck

CORD

Cord-Hung Pendants Include 7' of Standard Cord or 5' of Cotton or Cloth Cord, +/- For Socket Orientation

CHAIN

4-Gauge Chain Complete with Quick Link for On-Site Adjustments to Chain's Length

MAX FIXTURE WEIGHT

10 lbs

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC

COMPACT FLUORESCENT

Bi-Pin Base GU24 Socket, 120 VAC

LED

Conoco Series Also Available in LED. Please Visit Website for LED Specifications.

MATERIAL & FINISHES

POWDER COAT SHADE

Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

PORCELAIN SHADE

Hand-Spun from 20 Gauge Sheet Metal

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

PORCELAIN FINISHES

Applied by Hand and Fired in a High Temperature Oven

COPPER

Hand-Spun from High Purity .032 Thick C11000-O60 ETP Copper

Hand-Spun from High Purity .050" Thick C2600-O60 Brass

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

Includes All Gooseneck, Stem and Flush Mounting Styles

CSA LISTED FOR DAMP LOCATIONS

Includes All Chain and Select Cord Hung Mounting Styles

ULLISTED FOR DAMP LOCATIONS

Includes All Gooseneck, Stem, Chain and Select Cord Hung Mounting Styles with Acrylic Diffuser Option

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

UL CERTIFICATION

UL Listed Fixtures Available upon Request. Please Consult Factory for Additional Information.