



SPS-0486 REV A
DRUM SERIES

JOB NAME: _____ FIXTURE TYPE: _____



BLE - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____
 _____ - _____ - _____ - _____
 _____ - _____ - _____ - _____
 _____ - _____ - _____ - _____
 _____ - _____ - _____ - _____
 _____ - _____ - _____ - _____

Order Example: BLE - CN - DRM - 400 - CN48 - 975 - SBK - PB7 - 400 - NA - E26

A - MOUNTING STYLE

C	Cord Hung
CN	Chain Hung ¹
F	Flush Mount ¹
FSF	Semi-Flush Mount
G	Gooseneck
S	Stem Mount

B - GLASS STYLE

DRM	Opaque Drum Shade
DRMCL	Clear Drum Shade

C - FITTER FINISH

POWDER COAT FINISHES:

100	Black
105	Textured Black
200	White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
495	Sherbet Orange
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue
705	Navy
710	Cobalt Blue
715	Delphite Blue
790	Lavender
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized

NATURAL METALS²:

995	Raw Copper
996	Weathered Copper
997	Raw Brass
998	Weathered Brass
999	Oil-Rubbed Copper

D - MOUNTING

CSA LISTED CORD OPTIONS:

SBK	Standard Black
SWH	Standard White
CSB	Black Cloth
CSW	White Cloth
CMG	Grey Cloth
CSR	Red Cloth
CRZ	Red Chevron Cloth
CSBW	Black & White Cloth
CSRW	Red & White Cloth
CSBG	Black & Gold Cloth
CSBP	Black & Pink Cloth
CSGW	Gold & White Cloth
CSUW	Blue & White Cloth
CSBB	Black & Brown Cloth

NON-CSA LISTED CORD OPTIONS:

TBW	Black & White Twist
TBK	Black Cotton Twist
TWH	White Cotton Twist
TRW	Red & White Twist
TBR	Brown Cotton Twist
TBB	Brown & Beige Twist
TRD	Red Cotton Twist
TPT	Putty Cotton Twist

FLUSH MOUNT OPTIONS:

F	Flush Mount ¹
FSF	Semi-Flush Mount

STEM MOUNT OPTIONS²:

ST503	.5" Stem Mount, 3"
ST506	.5" Stem Mount, 6"
ST512	.5" Stem Mount, 12"
ST518	.5" Stem Mount, 18"
ST524	.5" Stem Mount, 24"
ST536	.5" Stem Mount, 36"
ST548	.5" Stem Mount, 48"

CHAIN MOUNT OPTIONS¹:

CN36	3' of Chain
CN48	4' of Chain
CN60	5' of Chain
CN72	6' of Chain

D - MOUNTING (CONTINUED)

GOOSENECK OPTIONS:

G1¹	G16¹
G2¹	G17
G3¹	G19¹
G4	G22
G5¹	G24
G6	G25
G7	G26¹
G8	G32
G9	G34¹
G10	G35¹
G11¹	G36¹
G12¹	G40¹
G13	G64¹
G14	G65¹
G15	

E - MOUNTING FINISH

Please Note: See Section C for all applicable Mounting Finish Options (I) If Cord Hung [C] Mounting Style, selection identifies canopy finish (II) If Flush Mount [F] or Semi-Flush Mount [FSF] Mounting Style, select NA (III) If Stem Mount [S] Mounting Style, select NA. Stem and Canopy Finish will match the Fitter Finish selected in Section C. (IV) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish. Natural Finishes not available. (V) If Gooseneck [G] Mounting Style, select NA. Gooseneck and Backplate Finish will match the Fitter Finish selected in Section C.

NA Not Applicable

F - CORDS³

NA Not Applicable

Please Note: See Section D for all applicable CSA and Non-CSA Listed Cord Options for Chain Hung Mounting Style

G - PAINTED BAND

NA	No Painted Band
PB7	Single Painted Band
PB8	Four Painted Band
PB9	Seven Painted Band

H - PAINTED BAND FINISH

NA	Not Applicable
100	Black
200	White ⁵
307	Emerald Green
311	Jadite
390	Teal
400	Barn Red
490	Magenta
500	Buttery Yellow
600	Bronze
700	Royal Blue
705	Navy
715	Delphite Blue

I - MOUNTING ACCESSORIES

NA	None/Not Applicable
HSC	Hang Straight Canopy ^{1,4}
HDSMC	Heavy Duty Stem Mount Canopy ^{1,4}
HDBP	Heavy Duty Backing Plate ^{1,6}
DBPC	Decorative Backing Plate Cover ⁶
DCHX	Decorative Backing Plate Cover & Hex Cover ⁶
HEXC	Hex Coupler Cover
DD	Dusk-to-Dawn Photocell ⁶


J - LIGHT SOURCE

E26	100 Watt Max
GU24	18 Watt Max


IMPORTANT: (1) Not available in Natural Metals (2) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals. (3) Only applicable if Chain Hung mounting style is selected in Section A and D, select NA if another mounting style is selected (4) Only applicable if Stem Mount mounting style is selected in Section A (5) White Painted Band not recommended if Opaque Glass is selected in Section B, as it blends into opaque glass (6) Only applicable if Gooseneck Mounting Style is selected in Section A (7) Stem diameter will be .75 if a Natural Metal is selected as the Mounting Finish

MOUNTING STYLE


CORD HUNG PENDANT (C)

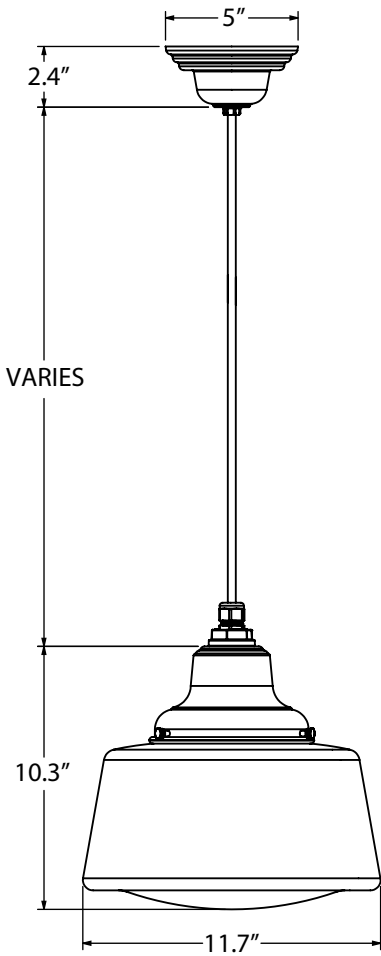


FLUSH MOUNT (F)

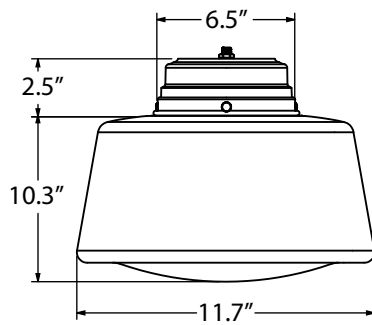


CHAIN HUNG PENDANT (CN)

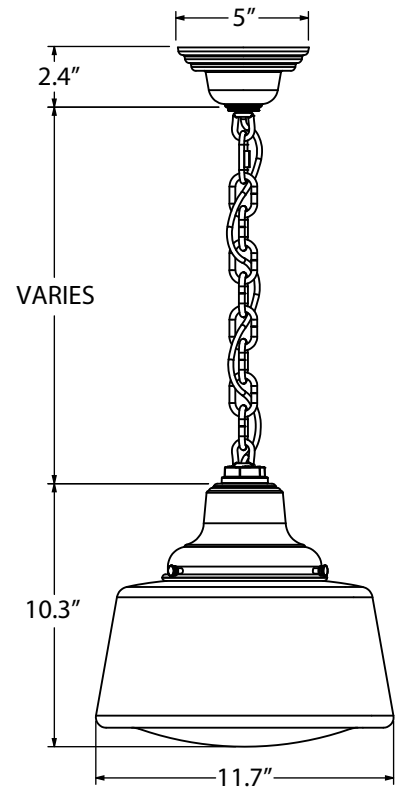


SEMI-FLUSH MOUNT (FSF)

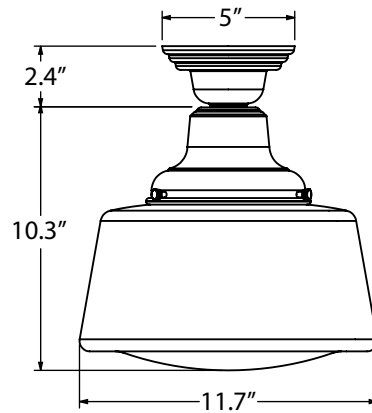


STEM MOUNT PENDANT (S)

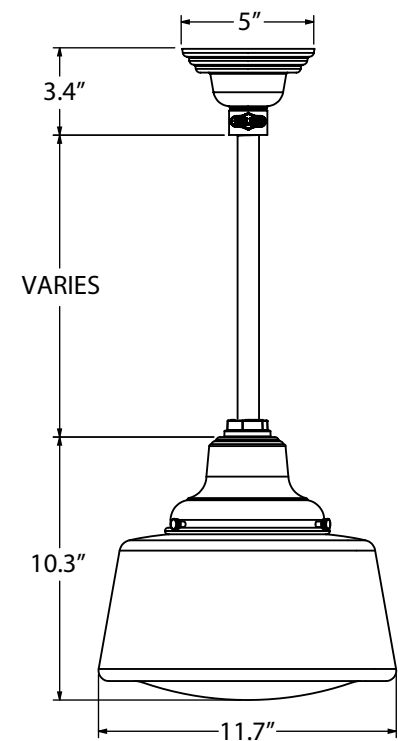


GOOSENECK (G)

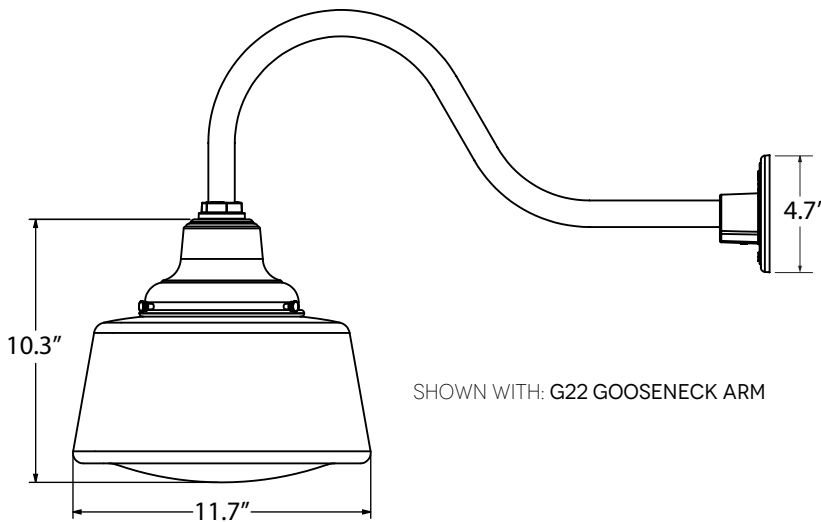


PAINTED BANDS



PB7 SINGLE PAINTED BAND



PB8 FOUR PAINTED BAND



PB9 SEVEN PAINTED BAND

SPECIFICATIONS

MOUNTING

STEM
 1/2" Nominal (0.84" Actual) 6063 Aluminum Mounting Stem.
 Custom Lengths Available upon Request.

GOOSENECK
 1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
 6063 Aluminum Gooseneck

CORD
 Cord-Hung Pendants Include 7' of Standard Cord or 5' of Cotton or
 Cloth Cord, +/- For Socket Orientation

CHAIN
 4-Guage Chain Complete with Quick Link for On-Site Adjustments
 to Chain's Length

MAX FIXTURE WEIGHT
 10 lbs

MATERIAL & FINISHES

SCHOOLHOUSE FITTER
 Hand-Spun from High Purity 0.050" Thick 3003-O Temper
 Aluminum

POWDER COAT FINISHES
 Polyester Powder Coat Finishes Are Electro-Statically Applied and
 Thermocured

COPPER FINISHES
 Hand-Spun from High Purity .032 Thick C11000-O60 ETP Copper

BRASS FINISHES
 Hand-Spun from High Purity .050" Thick C2600-O60 Brass

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
 Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
 Located in Titusville, FL

CSA LISTED FOR DAMP LOCATIONS
 Includes All Chain, Flush Mount, Semi-Flush Mount, Gooseneck,
 Stem, Mounting Styles and Select Cord Hung Mounting Styles

LIMITED WARRANTY
 For Additional Information on Our Limited Warranty, Please See
 Our Terms & Conditions

UL CERTIFICATION
 UL Listed Fixtures Available upon Request. Please Consult Factory
 for Additional Information.

LIGHT SOURCE

INCANDESCENT
 Medium Base E26 Socket, 120 VAC

COMPACT FLOURESCENT
 Bi-Pin Base GU24 Socket, 120 VAC

LED
 The Drum Series Also Available in LED. Please Visit Website for LED
 Specifications.