

**IMPORTANT:** (1) Not available with Acrylic Diffuser accessory (2) WHE8 only available in 1/2" Gooseneck and Stem Mount Options (3) Not available in Chain Hung Mounting Style (4) All Porcelain Enamel finished shades feature a white interior and a black outer rim (5) All Powder Coat finished shades, Galvanized excluded, feature a white interior (6) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals (7) Not available with Chain Hung option (CN) (8) Not available in Natural Metals (9) Only applicable if Chain Hung Mounting Style selected in Section A, select NA if another Mounting Style is selected (10) Acrylic Diffuser accessory reduces incandescent wattage to 40W (11) Fixture is UL Listed for Damp Locations with Acrylic Diffuser (12) Only applicable if Stem Mounting Style is selected in Section A (13) Only applicable if Gooseneck Mounting style is selected in Section A (14) Not available for G19, G36 & G40 (15) Fixtures configured with GU24 are not non-returnable

980

**Brushed Aluminum** 

Brown & Beige Twist

TBB

605

615


700

Rust

**Royal Blue** 

**Oil-Rubbed Bronze** 

## BARN LIGHT ELECTRIC CO.

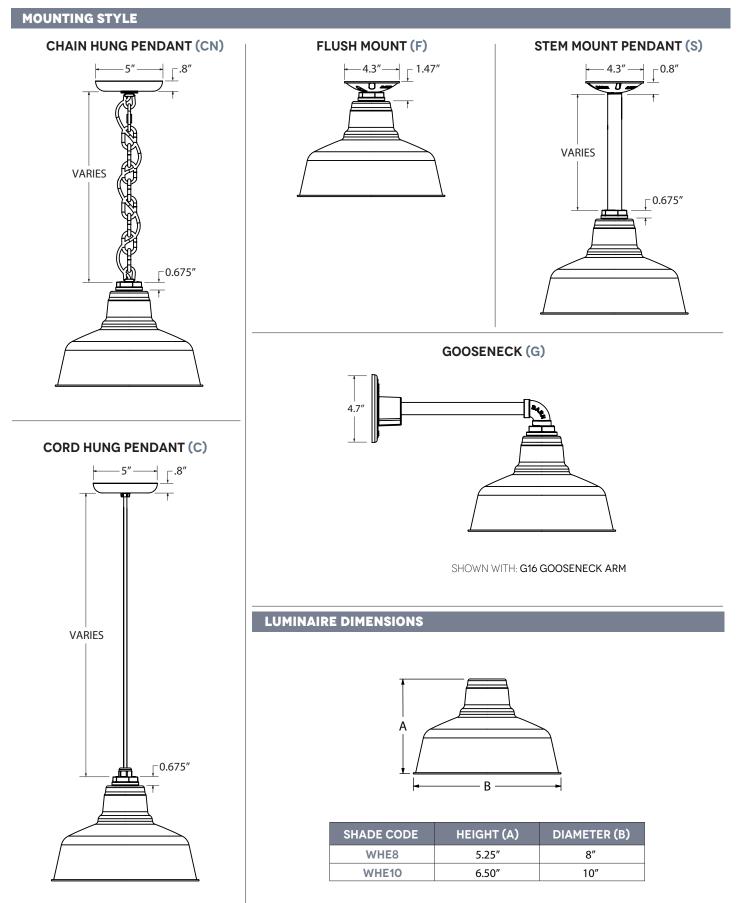

## BARN LIGHT ELECTRIC CO.

SPECIFICATIONS	
<b>CERTIFICATIONS, LISTINGS &amp; WARRANTY</b>	LIGHT SOURCE
MADE IN THE USA Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL	INCANDESCENT Medium Base E26 Socket, 120 VAC, 200 Watt Max
CSA LISTED FOR WET LOCATIONS Includes All Gooseneck, Stem and Flush Mounting Styles ACR UL Listed for Damp Locations for Gooseneck and Stem Mounting Styles	COMPACT FLUORESCENT Bi-Pin Base GU24 Socket, 120 VAC, 23 Watt Max
CSA LISTED FOR DAMP LOCATIONS Includes All Chain and Select Cord Hung Mounting Styles ACR UL Listed for Damp Locations	
LIMITED WARRANTY For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions	
UL CERTIFICATION UL Listed Fixtures Available upon Request. Please Consult Factory for Additonal Information.	
CONSTRUCTION & FINISH	
POWDER COAT SHADE Hand-Spun from High Purity 3003-O Temper Aluminum	
PORCELAIN SHADE Hand-Spun from 20 Gauge Porcelain Steel	
GALVANIZE SHADE Hand Spun from High Quality Galvanized Steel	
COPPER Hand-Spun from High Purity C11000-O60 ETP Copper	
BRASS Hand-Spun from High Purity C2600-O60 Brass	
POWDER COAT FINISHES Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured	
PORCELAIN FINISHES Applied by Hand and Fired in a High Temperature Oven	
STEM 1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.	
GOOSENECK 1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck	
CORD Cord-Hung Pendants Include 7' of Standard Cord or 5' of Cotton or Cloth Cord, +/- For Socket Orientation	
CHAIN 4-Gauge Chain Complete with Quick Link for On-Site Adjustments to Chain's Length	