



REV 05.03.18

THE FARGO STEM & LOOP PENDANT

BARN LIGHT PENDANT FAMILY

Max Weight: 10.0 lbs

PROJECT NAME _____

PROJECT TYPE _____

SPS-0165

BLE - S - SL - FAR - _____ - _____ - _____ - _____ - _____ - _____
A B C D E F

Order Example: BLE - S - SL - FAR - 307 - TBK - 18 - NK - NA - NA

A - SHADE FINISH

POWDER COAT FINISHES¹:

- 100 Black
- 105 Textured Black
- 200 White
- 300 Dark Green
- 307 Emerald Green
- 311 Jadite
- 370 Mint
- 380 Chartreuse
- 390 Teal
- 400 Barn Red
- 420 Orange
- 470 Watermelon
- 480 Blush Pink
- 490 Magenta
- 500 Buttery Yellow
- 570 Sunflower
- 600 Bronze
- 601 Chocolate
- 605 Rust
- 615 Oil-Rubbed Bronze
- 700 Royal Blue
- 705 Navy
- 710 Cobalt Blue
- 715 Delphite Blue
- 800 Industrial Grey
- 805 Charcoal Granite
- 810 Graphite
- 975 Galvanized

B - CORDS

NON-CSA LISTED CORD OPTIONS:

- TBK Black Cotton Twist
- TPT Putty Cotton Twist

C - STEM LENGTH

- 6 6" Stem
- 12 12" Stem
- 18 18" Stem
- 24 24" Stem
- 36 36" Stem

D - STEM & CANOPY FINISH

- NS Nickel Socket with No Switch
- NK Nickel Socket with Knob Switch
- NP Nickel Socket with Black Paddle Switch
- BS Brass Socket with No Switch
- BK Brass Socket with Knob Switch
- BP Brass Socket with Black Paddle Switch

E - WIRE CAGE

- NA No Wire Cage
- WC Wire Cage


F - WIRE CAGE FINISH²

- NA Not Applicable

Please Note: See **Section A** for all applicable wire cage finish options


IMPORTANT: (1) All Powder Coat finished shades, excluding 975-Galvanized, feature a white interior (2) Only applicable if a wire cage is selected in Section D, select NA if no wire cage is selected

DIMENSIONAL DRAWING

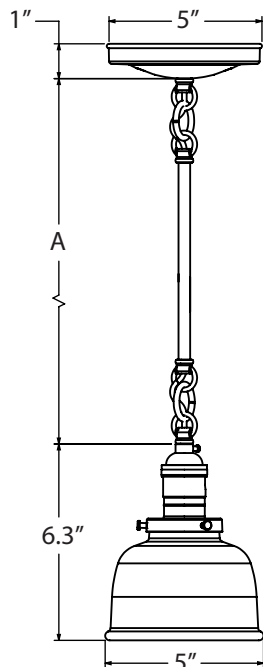

STEM LENGTH	TOTAL LENGTH (A)
6 (6")	11"
12 (12")	17"
18 (18")	23"
24 (24")	29"
36 (36")	41"

STEM & CANOPY FINISH

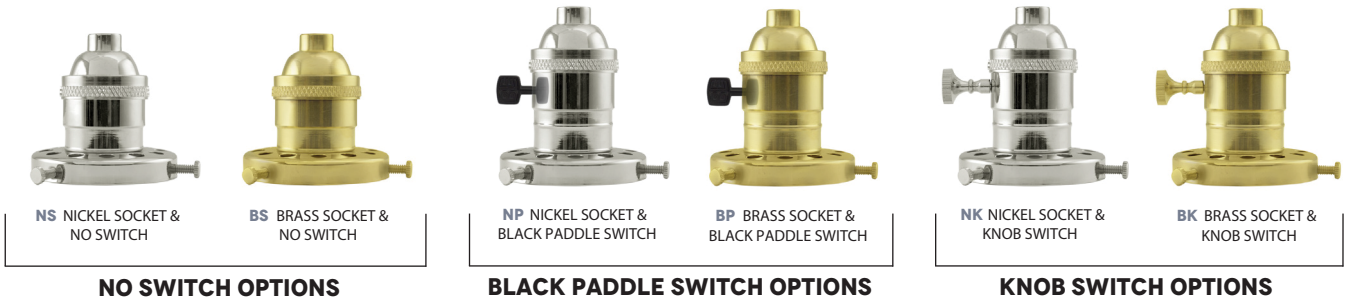

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
INCANDESCENT (MED E26)					
E26	60W Max	1400*	100	120 VAC	Bulb Dependant

SPECIFICATIONS

CONSTRUCTION

CANOPY
5" Hand-Spun, High Purity 0.050" Thick 3003-O Temper Aluminum Canopy

STEM
1/4" Nominal (0.54" Actual), Sch 40, 6063 Aluminum Mounting Stem

SHADE & FINISHES

FARGO SHADE
Hand-Spun, High Purity 0.050" Thick 3003-O Temper Aluminum Shade

POWDER COAT FINISHES
Polyester Powdercoat Electro-Statically Applied and Thermocured

LIGHT SOURCE

SOCKET
E26 Medium Base Socket, 60W Max

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in Titusville, FL.

CSA LISTED FOR DRY LOCATIONS

LIMITED WARRANTY
For Additional Information on our Limited Warranty, Please See our Terms & Conditions