

SPS-0251 REV B

FLUTED SHADE FLOOR LAMP

JOB NAME: FIXTURE TYPE:

N
ľ
1
/
Л

BLE - L - FL005 -

Order Example: BLE - L - FL005 - 500 - 975 - CSBW

A - SHADE/BASE FINISH

POWDER COAT FINISHES1:

100 Black

105 **Textured Black**

106 Matte Black

200 White

206 Matte White

300 Dark Green

307 **Emerald Green**

311 **Jadite**

370 Mint

380 Chartreuse

390 Teal

400 Barn Red

420 Orange

470 Watermelon

480 Blush Pink

490 Magenta

495 **Sherbet Orange**

500 **Buttery Yellow**

Sunflower 570

600 Bronze

601 Chocolate

605 Rust

615 Oil-Rubbed Bronze

700 **Royal Blue**

705 Navy

710 **Cobalt Blue**

715 Delphite Blue 790

Lavender

800 Industrial Grey

805 **Charcoal Granite**

810 Graphite

975 Galvanized

B - STEM FINISH

975 Galvanized 997 Raw Brass

C - CORDS²

CSA LISTED CORD OPTIONS:

SBK Standard Black SWH Standard White Black Cloth CSB **CSW** White Cloth CSR Red Cloth


CSBB Black & Brown Cloth CSRW Red & White Cloth CSGW Gold & White Cloth

CSBG Black & Gold Cloth **CSBW** Black & White Cloth CSBP Black & Pink Cloth

CSUW Blue & White Cloth CRZ Red Chevron Cord

CMG **Grey Cotton Cord**

LUMINAIRE DIMENSIONS

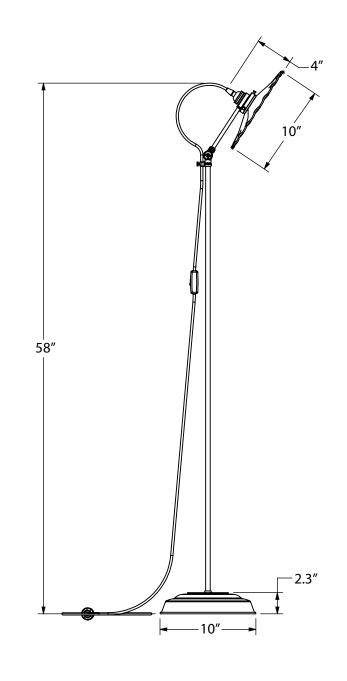

IMPORTANT: (1) All Powder Coat finished shades, excluding 975-Galvanized, feature a white interior (2) SWH-Standard White Cord and CSW-White Cloth Cord include a white plug and switch, all othe cord options will include a black plug and switch

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR DRY LOCATIONS

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

CONSTRUCTION & FINISH

POWDERCOAT SHADE

Hand-Spun from High Purity 3003-O Temper Aluminum

GALVANIZED SHADE

Hand Spun from High Quality Galvanized Steel

POWDER COAT FINISHES

Polyester Powder Coat Finishes are Electro-Statically Applied and Thermocured

CAST IRON WEIGHTED BOTTOM

Features a Cast Iron Weighted Bottom to Prevent Tipping

CORD & PLUG

Complete with 8 Feet of Cord, 2-Prong Polarized Plug and Inline On/Off Switch

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC, 60W Max