




SPS-0062 REV B

LARAMIE SERIES

JOB NAME: _____ FIXTURE TYPE: _____



BLE - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

A B C D E F G

_____ - _____ - _____

H I J

Order Example: BLE - C - LAR12 - 200 - CSGW - 200 - TGG - 975 - RIB - NA - E26

A - MOUNTING STYLE

- C** Cord Hung
F Flush Mount
G Gooseneck
S Stem Mount

B - SHADE SIZE**LARAMIE:**

- LAR8** 8" Shade¹
LAR12 12" Shade
LAR16 16" Shade

C - SHADE FINISH**POWDER COAT FINISHES²:**

- 100** Black
105 Textured Black
106 Matte Black
200 White
206 Matte White
300 Dark Green
307 Emerald Green
311 Jadite
370 Mint
380 Chartreuse
390 Teal
400 Barn Red
420 Orange
470 Watermelon
480 Blush Pink
490 Magenta
495 Sherbet Orange
500 Buttery Yellow
570 Sunflower
600 Bronze
601 Chocolate
605 Rust
615 Oil-Rubbed Bronze
700 Royal Blue
705 Navy
710 Cobalt Blue
715 Delphite Blue
790 Lavender
800 Industrial Grey
805 Charcoal Granite
810 Graphite
975 Galvanized

D - MOUNTING

Please Note: If Flush Mount [F] is selected in **Section A**, please select **NA**

- NA** Not Applicable

CSA LISTED CORD OPTIONS:

- SBK** Standard Black
SWH Standard White
CSB Black Cloth
CSW White Cloth
CSR Red Cloth
CSBB Black & Brown Cloth
CSRW Red & White Cloth
CSGW Gold & White Cloth
CSBG Black & Gold Cloth
CSBW Black & White Cloth
CSBP Black & Pink Cloth
CSUW Blue & White Cloth
CMG Grey Cotton
CRZ Red Chevron

NON-CSA LISTED CORD OPTIONS:

- TBK** Black Cotton Twist
TWH White Cotton Twist
TBR Brown Cotton Twist
TRD Red Cotton Twist
TPT Putty Cotton Twist
TBW Black & White Twist
TRW Red & White Twist
TBB Brown & Beige Twist

GOOSENECK OPTIONS:

- | | |
|-------------------------|------------------------|
| G1 | G16 |
| G2³ | G17³ |
| G3⁴ | G19³ |
| G4^{3,4} | G22³ |
| G5³ | G24³ |
| G6³ | G25³ |
| G7³ | G26 |
| G8³ | G32³ |
| G9³ | G34 |
| G10³ | G35 |
| G11 | G36³ |
| G12 | G40³ |
| G13³ | G64³ |
| G14³ | G65³ |
| G15³ | |

D - MOUNTING (CONTINUED)**STEM MOUNT OPTIONS:**

- ST506** .5" Stem Mount, 6"
ST512 .5" Stem Mount, 12"
ST518 .5" Stem Mount, 18"
ST524 .5" Stem Mount, 24"
ST536 .5" Stem Mount, 36"
ST548 .5" Stem Mount, 48"
ST706 .75" Stem Mount, 6"³
ST712 .75" Stem Mount, 12"³
ST718 .75" Stem Mount, 18"³
ST724 .75" Stem Mount, 24"³
ST736 .75" Stem Mount, 36"³
ST748 .75" Stem Mount, 48"³

E - MOUNTING FINISH

Please Note: See **Section C** for Finish Options. 980-Brushed Aluminum also available for Gooseneck (except G36, G40, G64 & G65) and Stem mounting styles.

(I) If Cord Hung [C] or Flush Mount [F] Mounting Style, selection identifies canopy finish

(II) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish

- 980** Brushed Aluminum

F - SHADE ACCESSORIES

- NA** None
TGG Heavy Duty Guard^{5,6}
CGG Cast Guard^{5,6}
WGG Wire Guard^{5,6}
WC Wire Cage

G - SHADE ACCESSORY FINISH

Please Note: Selection only applicable if accessory is selected in **Section F**, select NA if no accessory selected. See **Section C** for all Finish Options.

- NA** Not Applicable

H - GLASS OPTION^{5,6}

- NA** Not Applicable
CLR Clear Glass
FST Frosted Glass
RIB Ribbed Glass

I - MOUNTING ACCESSORY

- NA** None/Not Applicable
HSC Hang Straight Canopy⁷
HDSMC Heavy Duty Stem Mount Canopy⁷
HDBP Heavy Duty Backing Plate^{8,9}
DD Dusk-to-Dawn Photocell^{8,9}
DBPC Decorative Backing Plate Cover^{8,9}


J - LIGHT SOURCE

- E26** 200 Watt Max
GU24 24 Bi-Pin, 23W Max¹⁰


IMPORTANT: (1) Guard and Glass not available (2) All Powder Coat finished shades, Galvanized excluded, feature a white interior (3) Mounting option not available if CLAR8 shade size is selected in Section B (4) Not available with 16" shade size (5) Guard and Glass accessory reduces incandescent wattage to 100W Max & GU24 Bi-Pin to 18W Max (6) Guard and Glass accessory not applicable if CLAR8 is selected in Section B (7) Selection only applicable if Stem Mount is selected in Section A (8) Selection only applicable if Gooseneck is selected in Section A (9) Not available with G19, G36 & G40 Gooseneck options (10) Fixtures configured with GU24 socket are non-returnable

MOUNTING STYLE


CORD HUNG PENDANT (C)

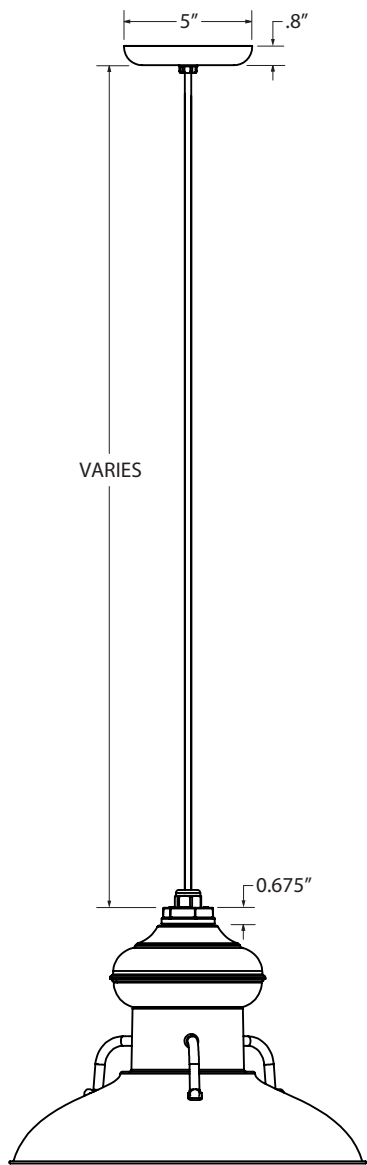


FLUSH MOUNT (F)

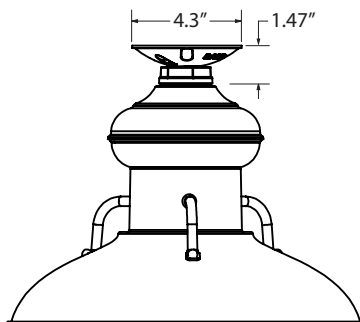


STEM MOUNT PENDANT (S)

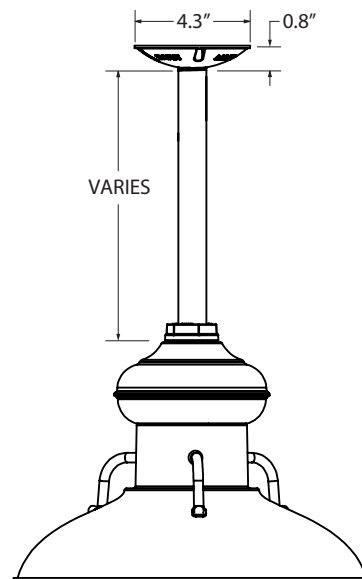

GOOSENECK (G)

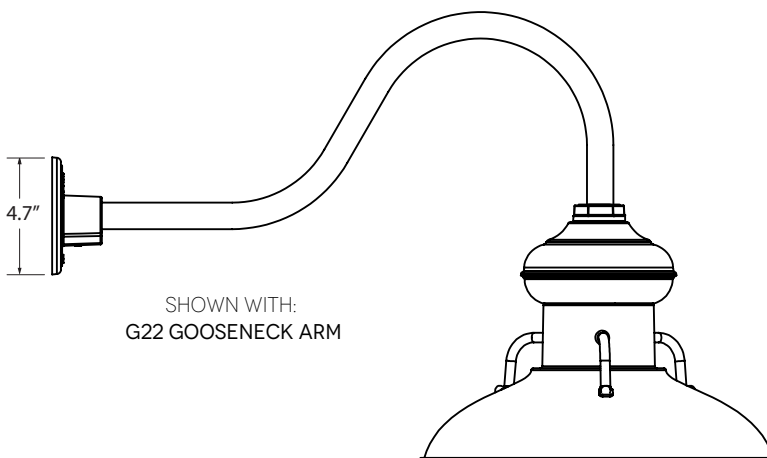

LUMINAIRE DIMENSIONS

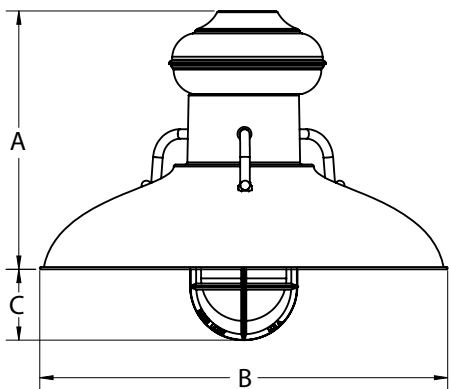

SHADE CODE	HEIGHT (A)	DIAMETER (B)	EXTENSION (C)
LAR8	5.7"	8"	N/A
LAR12	8"	12"	5"
LAR16	10"	16"	3"

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility
Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS
Includes Flush, Stem and Gooseneck Mounting Styles

CSA LISTED FOR DAMP LOCATIONS
Includes Select Cord Hung Mounting Styles

LIMITED WARRANTY
For Additional Information on Our Limited Warranty, Please See
Our Terms & Conditions

LIGHT SOURCE

INCANDESCENT
Medium Base E26 Socket, 120 VAC, 200W Max

COMPACT FLUORESCENT
Bi-Pin Base GU24 Socket, 120 VAC, 23W Max

CONSTRUCTION & FINISH

POWDER COAT SHADE
Hand-Spun from High Purity 3003-O Temper Aluminum

GALVANIZED SHADE
Hand Spun from High Quality Galvanized Steel

POWDER COAT FINISHES
Polyester Powder Coat Finishes Are Electro-Statically Applied and
Thermocured

STEM
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
6063 Aluminum Mounting Stem. Custom Lengths Available upon
Request.

GOOSENECK
1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,
6063 Aluminum Gooseneck

CORD
Cord-Hung Pendants Include 7' of Standard Cord or 5' of Cotton or
Cloth Cord, +/- For Socket Orientation