



BLE - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

A                      B                      C                      D                      E                      F                      G

\_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

H                      I                      J                      K                      L

Order Example: BLE - G - ULO16 - 600 - G22 - 980 - NA - NA - 975 - FST - NA - LED16.8 - 2700K

**A - MOUNTING STYLE**

- C** Cord Hung
- CN** Chain Hung
- F** Flush Mount
- G** Gooseneck
- S** Stem Mount

**B - SHADE & SHADE SIZE**

- OUTBACK:**
- ULO12** 12"      **ULO18** 18"
  - ULO14** 14"      **ULO20** 20"
  - ULO16** 16"

**C - SHADE FINISH**

- POWDER COAT FINISHES<sup>5</sup>:**
- 100** Black
  - 105** Textured Black
  - 200** White
  - 300** Dark Green
  - 307** Emerald Green
  - 311** Jadeite
  - 370** Mint
  - 380** Chartreuse
  - 390** Teal
  - 400** Barn Red
  - 420** Orange
  - 470** Watermelon
  - 480** Blush Pink
  - 490** Magenta
  - 495** Sherbet Orange
  - 500** Buttery Yellow
  - 570** Sunflower
  - 600** Bronze
  - 601** Chocolate
  - 605** Rust
  - 615** Oil-Rubbed Bronze
  - 700** Royal Blue
  - 705** Navy
  - 710** Cobalt Blue
  - 715** Delphite Blue
  - 790** Lavender
  - 800** Industrial Grey
  - 805** Charcoal Granite
  - 810** Graphite
  - 975** Galvanized

- NATURAL METALS<sup>8</sup>:**
- 995** Raw Copper
  - 996** Weathered Copper
  - 997** Raw Brass
  - 998** Weathered Brass
  - 999** Oil-Rubbed Copper

**D - MOUNTING**

Please Note: If Flush Mount [F] is selected in Section A, please select **NA**

**NA** Not Applicable

**CSA LISTED CORD OPTIONS:**

- SBK** Standard Black
- SWH** Standard White
- CSB** Black Cloth
- CSW** White Cloth
- CMG** Grey Cotton
- CSR** Red Cloth
- CRZ** Red Chevron
- CSBB** Black & Brown Cloth
- CSRW** Red & White Cloth
- CSGW** Gold & White Cloth
- CSBG** Black & Gold Cloth
- CSBW** Black & White Cloth
- CSBP** Black & Pink Cloth
- CSUW** Blue & White Cloth

**CHAIN MOUNT OPTIONS:**

- CN36** 3' of Chain<sup>1</sup>
- CN48** 4' of Chain<sup>1</sup>
- CN60** 5' of Chain<sup>1</sup>
- CN72** 6' of Chain<sup>1</sup>

**GOOSENECK OPTIONS:**

- G1<sup>1</sup>**    **G11<sup>1</sup>**    **G25**
- G2<sup>1</sup>**    **G12<sup>1</sup>**    **G26<sup>1</sup>**
- G3<sup>4,11</sup>** **G13**    **G32**
- G4<sup>11</sup>**    **G14**    **G34<sup>1</sup>**
- G5<sup>1</sup>**    **G15**    **G35<sup>1</sup>**
- G6**    **G16<sup>1</sup>**    **G36<sup>1</sup>**
- G7**    **G17**    **G40<sup>1</sup>**
- G8**    **G19<sup>1</sup>**    **G64<sup>1</sup>**
- G9**    **G22**    **G65<sup>1</sup>**
- G10**    **G24**

**STEM MOUNT OPTIONS:**

- ST506** .5" Stem Mount, 6"<sup>1</sup>
- ST512** .5" Stem Mount, 12"<sup>1</sup>
- ST518** .5" Stem Mount, 18"<sup>1</sup>
- ST524** .5" Stem Mount, 24"<sup>1</sup>
- ST536** .5" Stem Mount, 36"<sup>1</sup>
- ST548** .5" Stem Mount, 48"<sup>1</sup>
- ST706** .75" Stem Mount, 6"
- ST712** .75" Stem Mount, 12"
- ST718** .75" Stem Mount, 18"
- ST724** .75" Stem Mount, 24"
- ST736** .75" Stem Mount, 36"
- ST748** .75" Stem Mount, 48"

**E - MOUNTING FINISH**

Please Note: See Section C for Finish Options. 980-Brushed Aluminum is also available for Gooseneck and Stem mounting styles.

- (I)** If Cord Hung [C], selection identifies canopy finish
- (II)** If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish. Natural Metals are not applicable
- (III)** If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish
- (IV)** If Flush Mount [F] Mounting Style, selection identifies canopy finish. Natural Metals are not applicable

**980** Brushed Aluminum

**F - CORDS<sup>7</sup>**

**NA** Not Applicable

Please Note: See Section D for all applicable CSA Listed Cord Options

**G - CAP OPTION<sup>3</sup>**

**NA** No Cap/Not Applicable

**CAP** Cap<sup>4</sup>

**H - CAST GUARD FINISH**

Please Note: See Section C for all applicable Cast Guard Finish Options

- (I)** Cast Guard not available in Natural Metals
- (II)** Fixture manufactured with TGG guard only.

**I - GLASS OPTION**

- CLR** Clear Glass
- FST** Frosted Glass
- RIB** Ribbed Glass
- SMK** Smoke Crackle Glass
- BLU** Blue Glass
- RED** Red Glass
- AMB** Amber Glass
- GRN** Green Glass

**J - MOUNTING ACCESSORY**

Please Note: Mounting Accessories below are only applicable with select Mounting Styles. Please refer to product listings on our website for further detail.

- NA** None/Not Applicable
- HSC** Hang Straight Canopy<sup>1,2</sup>
- HDSMC** Heavy Duty Stem Mount Canopy<sup>1,2</sup>
- HDBP** Heavy Duty Backing Plate<sup>1</sup>
- DD** Dusk-to-Dawn Photocell<sup>1,2</sup>
- DBPC** Decorative Backing Plate Cover<sup>1,2</sup>
- DCC** Decorative Canopy Cover<sup>2,10</sup>

**K - LIGHT SOURCE**

- E26** 100 Watt Max
- GU24** 24 Bi-Pin, 18W Max<sup>9</sup>
- LED16.8** 16.8W LED, 1600 Lumen


**L - COLOR TEMPERATURE<sup>6</sup>**

- NA** Not Applicable
- 2700K** 2700K, Warm White
- 3000K** 3000K, Neutral White
- 3500K** 3500K, Bright White
- 4000K** 4000K, Cool White


**IMPORTANT:** (1) Not available in Natural Metals (2) Only applicable if Stem Mounting Style selected in Section A (3) Cap not available if Chain Hung mounting style is selected in Section A (4) Cap Finish will match shade finish selected in Section C (5) All Powder Coat finished shades, Galvanized excluded, feature a white interior (6) Only applicable if LED16.8 Light Source is selected in Section K, select NA if non-LED source selected (7) Only applicable if Chain Hung Mounting Style is selected in Section A (8) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals (9) Fixtures configured with a GU24 socket are non-returnable (10) Only available if Natural Metal is selected in Section C (11) Not available in a 16" or larger shade size (12) Not available with G19, G36, & G40 Gooseneck option

**MOUNTING STYLE**


**CHAIN HUNG PENDANT (CN)**

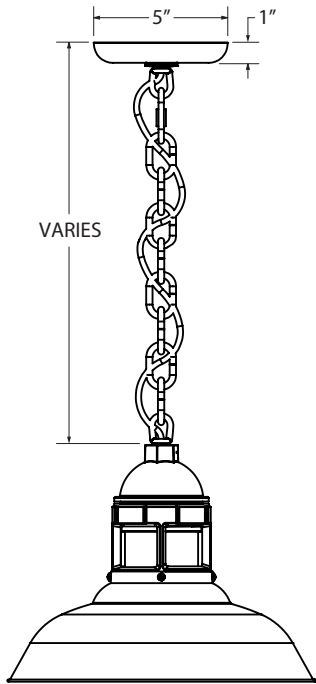


**CORD HUNG PENDANT (C)**

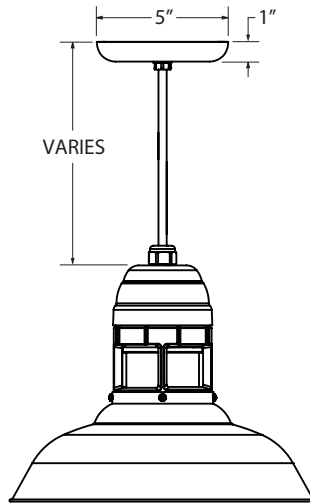


**STEM MOUNT PENDANT (S)**

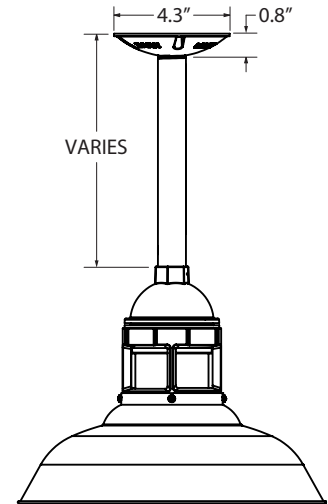


**FLUSH MOUNT (F)**

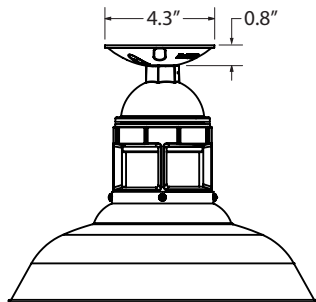


**GOOSENECK (G)**

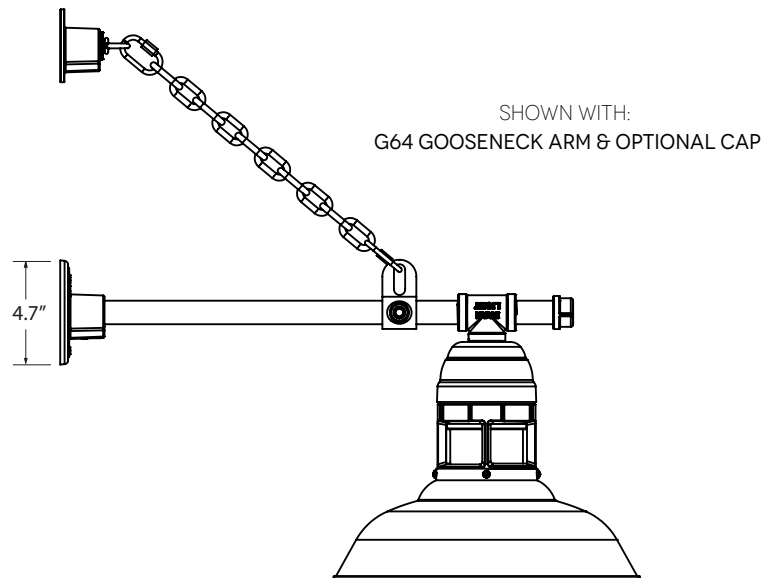

**LUMINAIRE DIMENSIONS**

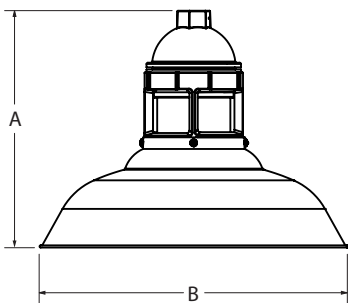

SHADE CODE	HEIGHT (A)	DIAMETER (B)
ULO12	10.8"	12"
ULO14	10.8"	14"
ULO16	11.3"	16"
ULO18	12.3"	18"
ULO20	12.8"	20"



SHOWN WITH OPTIONAL CAP SECTION - G

**SPECIFICATIONS**

**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA  
 Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility  
 Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS  
 Includes All Gooseneck, Stem and Flush Mounting Styles

CSA LISTED FOR DAMP LOCATIONS  
 Includes All Chain and Cord Hung Mounting Styles

LIMITED WARRANTY  
 For Additional Information on Our Limited Warranty, Please See  
 Our Terms & Conditions

OPERATING TEMPERATURE  
 -30°C to 40°C

**SHADE & FINISHES**

POWDER COAT SHADE  
 Hand-Spun from High Purity 0.050" Thick 3003-O Temper  
 Aluminum

POWDER COAT FINISHES  
 Polyester Powder Coat Finishes Are Electro-Staticly Applied and  
 Thermocured

COPPER  
 Hand-Spun from High Purity .032 Thick C11000-O60 ETP Copper

BRASS  
 Hand-Spun from High Purity .050" Thick C2600-O60 Brass

**MOUNTING**

STEM  
 1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,  
 6063 Aluminum Mounting Stem. Custom Lengths Available upon  
 Request.

GOOSENECK  
 1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40,  
 6063 Aluminum Gooseneck

CORD  
 Cord-Hung Pendants Include 8' of Cord, +/- For Socket Orientation

CHAIN  
 4-Gauge Chain Complete with Quick Link for On-Site Adjustments  
 to Chain's Length

MAX FIXTURE WEIGHT  
 10 lbs

**LIGHT SOURCE**

INCANDESCENT  
 Medium Base E26 Socket, 120 VAC, 100W Max

COMPACT FLUORESCENT  
 Bi-Pin Base GU24 Socket, 120 VAC, 18W Max

**LED16.8 LIGHT SOURCE**

LED TYPE: CREE CXB SERIES COB  
 INITIAL LUMENS DELIVERED: UP TO 1600 LUMENS

L90 (11K) > 61,000 HOURS

AVAILABLE CCT: 2700K, 3000K, 3500K, 4000K  
 Custom Temperatures Available upon Request

90+ CRI (R9 TYPICAL 60)  
 80+ CRI and 95+ CRI (R9 Typical 85) Available upon Request

2 STEP MACADAMS ELLIPSE

EFFICACY: UP TO 95 LPW  
 High Efficacy Available upon Request, Consult Factory for Addition-  
 al Information

**LED16.8 ELECTRICAL/LED DRIVER**

DRIVER TYPE: ERP EBRO20U-0400-42

DRIVE CURRENT: 400mA

POWER FACTOR > 0.9

EFFICIENCY: UP TO 85% TYPICAL

INPUT VOLTAGE: 120 VAC

CLASS 2 POWER SUPPLY

LED DRIVER LIFETIME: > 100,000 HOURS (@ 25 DEG C AMBIENT)

IP20 MINIMUM RATING CASE WITH SILICONE-BASED POTTING

PROTECTIONS  
 Output Open Load, Over-Current and Short-Circuit (hiccup), and  
 Over-Temperature with Auto Recovery

CONDUCTED AND RADIATED EMI  
 Compliant with FCC CFR Title 47 Part 15 Class B (120 VAC), Class A  
 (277 VAC) and EN55015 (CISPR 15) at 220, 230 and 240 VAC

**DIMMING**

LED 16.8  
 Triac & ELV Dimming at 120VAC, Able to Dim down to 1%.  
 Dependent on Specific Dimmer.  
 0-10V Dimming Available upon Request.

COMPATIBLE DIMMERS  
 Consult Factory for Additional Information on Dimming