

SPS-0488 REV A

ROUND GLASS SERIES

OB NAME: FIXTURE TYPE:



BLE -	-					-	-
	A	В	С	D	E	F	G
	Н -						
Order Ex	ample: BLE - C - RND	- 311 - SBK - 200 - NA	- PB10 - 311 - NA - E	26			

A - MOUNTING STYLE

С	Cord Hung
CN	Chain Hung ¹
F	Flush Mount ¹
FSF	Semi-Flush Mount
G	Gooseneck
S	Stem Mount

B - GLASS STYLE

RND	Opaque Round Glass
RNDCL	Clear Round Glass

C - FITTER FINISH

POWDER COAT FINISHES:

POWDER	COAT FINISHES:
100	Black
105	Textured Black
200	White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
495	Sherbet Orange
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue
705	Navy
710	Cobalt Blue
715	Delphite Blue
790	Lavender
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized

NATURAL METALS2:

995	Raw Copper
996	Weathered Copper
997	Raw Brass
998	Weathered Brass
999	Oil-Rubbed Copper

D - MOUNTING

CSA LISTED CORD OPTIONS:

SBK	Standard Black
SWH	Standard White
CSB	Black Cloth
CSW	White Cloth
CMG	Grey Cloth
CSR	Red Cloth
CRZ	Red Chevron Cloth
CSBW	Black & White Cloth
CSRW	Red & White Cloth
CSBG	Black & Gold Cloth
CSBP	Black & Pink Cloth
CSGW	Gold & White Cloth
CSUW	Blue & White Cloth
CSBB	Black & Brown Cloth

NON-CSA LISTED CORD OPTIONS:

TBW	Black & White Twist
TBK	Black Cotton Twist
TWH	White Cotton Twist
TRW	Red & White Twist
TBR	Brown Cotton Twist
TBB	Brown & Beige Twist
TRD	Red Cotton Twist
TPT	Putty Cotton Twist

FLUSH MOUNT OPTIONS:

LUSITI	TOURT OF HOUS.
F	Flush Mount ¹
FSF	Semi-Flush Mount

STEM MOUNT OPTIONS7:

ST503	.5" Stem Mount, 3"
ST506	.5" Stem Mount, 6"
ST512	.5" Stem Mount, 12"
ST518	.5" Stem Mount, 18"
ST524	.5" Stem Mount, 24"
ST536	.5" Stem Mount, 36"
ST548	.5" Stem Mount, 48"

CHAIN MOUNT OPTIONS1:

CN36	3' of Chain
CN48	4' of Chain
CN60	5' of Chain
CN72	6' of Chain

D - MOUNTING (CONTINUED)

GUUSENE	CK OPTIONS:
G1 ¹	G16 ¹
G2 ¹	G17
G3 ¹	G191
G4	G22
G5 ¹	G24
G6	G25
G7	G26 ¹
G8	G32
G9	G341
G10	G351
G11 ¹	G36 ¹
G121	G40 ¹
G13	G641
G14	G65 ¹
G15	

E - MOUNTING FINISH

Please Note: See **Section C** for all applicable Mounting Finish Options (I) If Cord Hung [C] Mounting Style, selection identifies canopy finish (II) If Flush Mount [F] or Semi-Flush Mount [FSF] Mounting Style, select NA (III) If Stem Mount [S] Mounting Style, select NA. Stem and Canopy Finish will match the Fitter Finish selected in Section C.

(IV) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish. Natural Finishes not available. (V) If Gooseneck [G] Mounting Style, select NA. Gooseneck and Backplate Finish will match the Fitter Finish selected in Section C.

NA Not Applicable

F - CORDS³

NA Not Applicable

Please Note: See Section D for all
applicable CSA and Non-CSA Listed
Cord Options for Chain Hung Mounting
Style

G - PAINTED BAND

No Painted Band
Two Painted Band
Three Painted Band
Four Painted Band

H - PAINTED BAND FINISH

NA	Not Applicable
100	Black
200	White ⁵
307	Emerald Green
311	Jadite
390	Teal
400	Barn Red
490	Magenta
500	Buttery Yellow
600	Bronze
700	Royal Blue
705	Navy
715	Delphite Blue

I - MOUNTING ACCESSORIES

None/Not Applicable

IVA	None/Not Applicable
HSC	Hang Straight Canopy ^{1,4}
HDSMC	Heavy Duty Stem Mount
	Canopy ^{1,4}
HDBP	Heavy Duty Backing Plate ^{1,6}
DBPC	Decorative Backing Plate Cover ⁶
DCHX	Decorative Backing Plate
	Cover & Hex Cover ⁶
HEXC	Hex Coupler Cover
DD	Dusk-to-Dawn Photocell ⁶


J - LIGHT SOURCE

E26	100 Watt Max
GU24	18 Watt Max


IMPORTANT: (1) Not available in Natural Metals (2) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals. (3) Only applicable if Chain Hung mounting style is selected in Section A and D, select NA if another mounting syle is selected (4) Only applicable if Stem Mount mounting style is selected in Section A (5) White Painted Band not recommended if Opaque Glass is selected in Section B, as it blends into opaque glass (6) Only applicable if Gooseneck Mounting Style is selected in Section A (7) Stem diameter will be .75 if a Natural Metal is selected as the Mounting Finish

MOUNTING STYLE


CORD HUNG PENDANT (C)

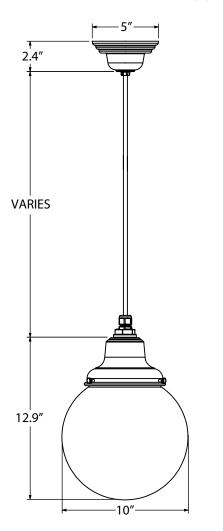


FLUSH MOUNT (F)




SEMI-FLUSH MOUNT (FSF)




CHAIN HUNG PENDANT (CN)

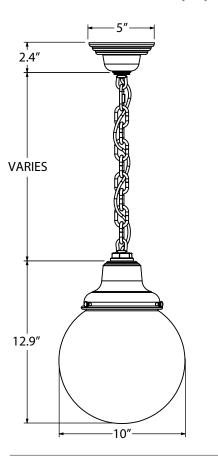

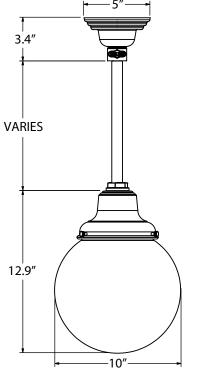

STEM MOUNT PENDANT (S)

GOOSENECK (G)

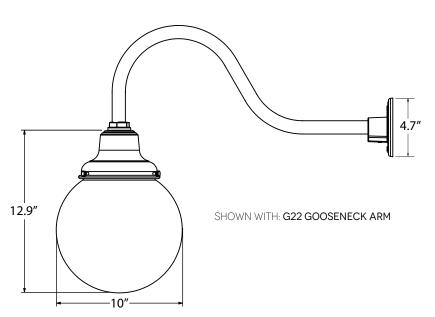

PAINTED BANDS







PB10 TWO PAINTED BAND

PB11 THREE PAINTED BAND

PB12 FOUR PAINTED BAND

SPECIFICATIONS

MOUNTING

STEM

1/2" Nominal (0.84" Actual) 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

GOOSENECK

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck

CORD

Cord-Hung Pendants Include 7' of Standard Cord or 5' of Cotton or Cloth Cord, +/- For Socket Orientation

CHAIN

4-Gauge Chain Complete with Quick Link for On-Site Adjustments to Chain's Length

MAX FIXTURE WEIGHT

10 lbs

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC

COMPACT FLOURESCENT

Bi-Pin Base GU24 Socket, 120 VAC

LFC

The Round Series Also Available in LED. Please Visit Website for LED Specifications.

MATERIAL & FINISHES

SCHOOLHOUSE FITTER

Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

COPPER FINISHES

Hand-Spun from High Purity .032 Thick C11000-O60 ETP Copper BRASS FINISHES

Hand-Spun from High Purity .050" Thick C2600-O60 Brass

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR DAMP LOCATIONS

Includes All Chain, Flush Mount, Semi-Flush Mount, Gooseneck, Stem, Mounting Styles and Select Cord Hung Mounting Styles

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

UL CERTIFICATION

UL Listed Fixtures Available upon Request. Please Consult Factory for Additional Information.