



BLE - PMS - TGG - _____ - _____ - _____ - _____ - _____ - _____

A
B
C
D
E

F
G

Order Example: BLE - PMS - TGG - 715 - RIB - PMDBF12 - 975 - LED16.8 - 3500K

A - SHADE SIZE

SEASIDE SHADE:
RWS12 12" Shade
RWS14 14" Shade

B - FINISHES

POWDER COAT FINISHES:

100	Black
105	Textured Black
200	White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue
705	Navy
710	Cobalt Blue
715	Delphite Blue
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized

C - GLASS OPTIONS

CLR	Clear Glass ¹
FST	Frosted Glass
RIB	Ribbed Glass
CCR	Clear Crackle Glass
SMK	Smoke Crackle Glass
HCR	Honey Crackle Glass

F - LIGHT SOURCE

E26	100 Watt Max
GU24	24 Bi-Pin CFL, 18W Max
LED16.8	1600 Lumen, 16W LED

D - DIRECT BURIAL POLE

NA	None
PMDBSP8	8' Smooth Pole
PMDBFP8	8' Fluted Pole
PMDBS10	10' Smooth Pole
PMDBF10	10' Fluted Pole
PMDBS12	12' Smooth Pole
PMDBF12	12' Fluted Pole

G - COLOR TEMPERATURE²


NA	Not Applicable
2700K	2700K, Warm White
3000K	3000K, Neutral White
3500K	3500K, Bright White
4000K	4000K, Cool White

E - DIRECT BURIAL POLE FINISH

NA	Not Applicable
100	Black
200	White
975	Galvanized

IMPORTANT: (1) Clear Glass not recommended if LED Light Source is selected in Section F (2) Only applicable if an LED Light Source is selected in Section F, select NA if another light source is selected


DIMENSIONAL DRAWING

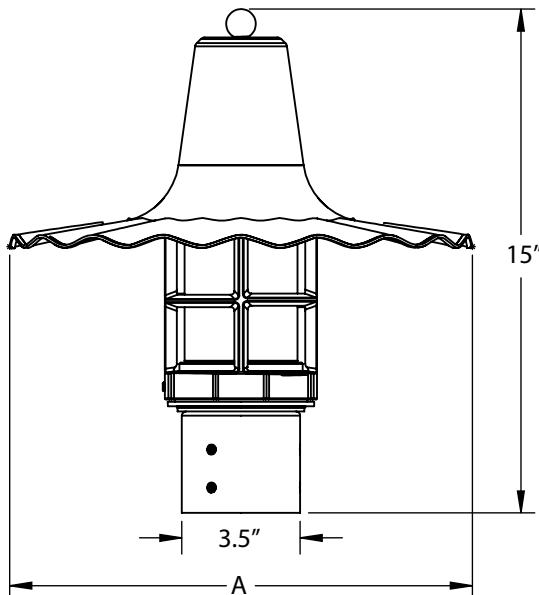

SHADE CODE	DIAMETER (A)
RWS12 (12" Shade)	11.7"
RWS14 (14" Shade)	13.7"

DIRECT BURIAL POLE

The optional Direct Burial Pole lets the Industrial Guard Post Mounts spread their unique style across an entire residential or commercial property. Made from durable aluminum, two pole styles — smooth and fluted — are available for this fixture.

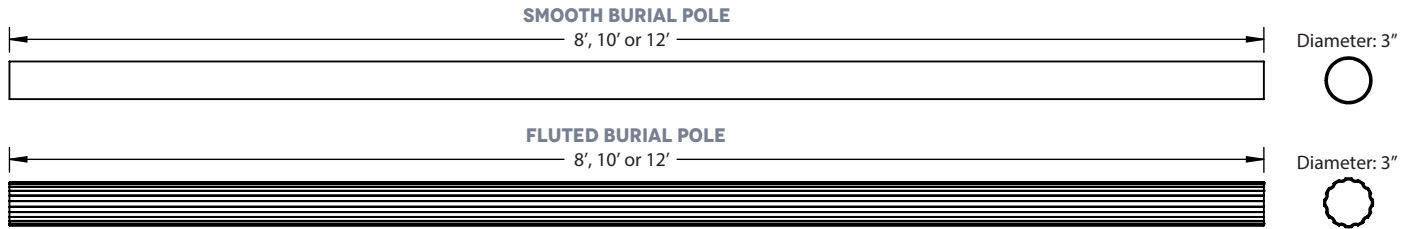

LIGHT SOURCE

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
INCANDESCENT (MED E26)					
E26	100W Max	1600*	100*	120 VAC	Bulb Dependant
COMPACT FLOURESCENT (GU24 CFL)					
GU24	18W Max	1100*	75*	120 VAC	Bulb Dependant
LED					
LED16.8	16W	1600	>90	120 VAC	TRIAC

SPECIFICATIONS

CONSTRUCTION

DIRECT BURIAL POLE
Optional Smooth Pole (12 Guage Galvanized Steel) or Fluted Pole (Schedule 40 Aluminum)

LED SPECIFICATIONS

LUMEN MAINTENANCE
LED16.8 Source is L90(11K) > 61,000 Hours.

COLOR TEMPERATURES
Standard color temperatures available include 2700K, 3000K, 3500K and 4000K. Custom temperatures available upon request.

CRI
Minimum 90 CRI. Consult factory for other CRI options.

EFFICACY
Up to 100 LPW based on wattage/lumens in the table.

DRIVER & DIMMING OPTION
Relient on Triac Dimming 16W / 120V integrated driver, down to 1% dimming.
Requires compatible dimming switch.

SHADE & FINISH

SEASIDE SHADE
Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES
Polyester Powder Coat Finishes are Electro-Staticly Applied and Thermocured

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
Manufactured and Hand-Crafted in our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

LIMITED WARRANTY
For Additional Information on our Limited Warranty, Please See Our Terms & Conditions