


STERLING WALL SCONCE

JOB NAME: _____ FIXTURE TYPE: _____



BLE - W -

<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>	<u>F</u>	<u>G</u>	<u>H</u>
<u>I</u>							

Order Example: BLE - W - DCS14 - 400 - TGG - RIB - 975 - NA - NA - NA - E26

A - SHADE SIZE

STERLING:

DCS12 12" Shade
DCS14 14" Shade
DCS16 16" Shade

B - FIXTURE FINISH

PORCELAIN FINISHES¹:

150	Black
250	White
350	Vintage Green
355	Jadite
455	Cherry Red
550	Yellow
650	Bronze
750	Cobalt Blue
765	Delphite Blue
850	Graphite
950	Metallic Chrome

POWDER COAT FINISHES²:

100	Black
105	Textured Black
106	Matte Black
200	White
206	Matte White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
495	Sherbet Orange
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue
705	Navy
710	Cobalt Blue
715	Delphite Blue
790	Lavender
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized

C - OPTIONAL ACCESSORY

NA	None
WC	Wire Cage
TGG	Heavy Duty Guard
CGG	Cast Guard
WGG	Wire Guard

D - GLASS OPTION³

NA	Not Applicable
CLR	Clear Glass
FST	Frosted Glass
RIB	Ribbed Glass
BLU	Blue Glass
RED	Red Glass
AMB	Amber Glass
GRN	Green Glass
SMK	Smoke Crackle Glass

E - OPTIONAL ACCESSORY FINISH

Please Note: See **Section B** for all optional accessory finish options.

(I) If a porcelain finish is selected, accessory will be powder coat painted-to-match.

(II) If no accessory is selected in Section C, please select NA.

NA Not Applicable

F - PLUG-IN OPTION

NA	None
L-WL	Plug with Inline On/Off Switch ⁴

G - PLUG-IN CORD OPTION

NA Not Applicable

CSA LISTED CORD OPTIONS:

SBK	Standard Black Cord
SWH	Standard White Cord
CMG	Grey Cotton
CRZ	Red Chevron
CSB	Black Cloth Cord
CSW	White Cloth Cord
CSR	Red Cloth Cord
CSBW	Black & White Cloth
CSRW	Red & White Cloth
CSBG	Black & Gold Cloth
CSBP	Black & Pink Cloth
CSGW	Gold & White Cloth
CSUW	Blue & White Cloth
CSBB	Black & Brown Cloth


H - DUSK-TO-DAWN PHOTOCELL⁵

NA	None/Not Applicable
DD	Dusk-to-Dawn Photocell

I - LIGHT SOURCE

E26	200 Watt Max
GU24	23 Watt Max ⁶

IMPORTANT: (1) All Porcelain Enamel finished shades feature a white interior and a black outer rim (2) All Powder Coat finished shades, with the exception of Galvanized, feature a white interior (3) Guard and Glass accessory reduces incandescent wattage to 100W Max and GU24 Bi-Pin to 18W Max (4) SWH-Standard White Cord and CSW-White Cloth Cord include a white plug and switch, all other cord options will include a black plug and switch (5) Dusk-to-Dawn Photocell not applicable if Plug-In Option selected in Section F (6) Fixtures configured with GU24 socket are non-returnable

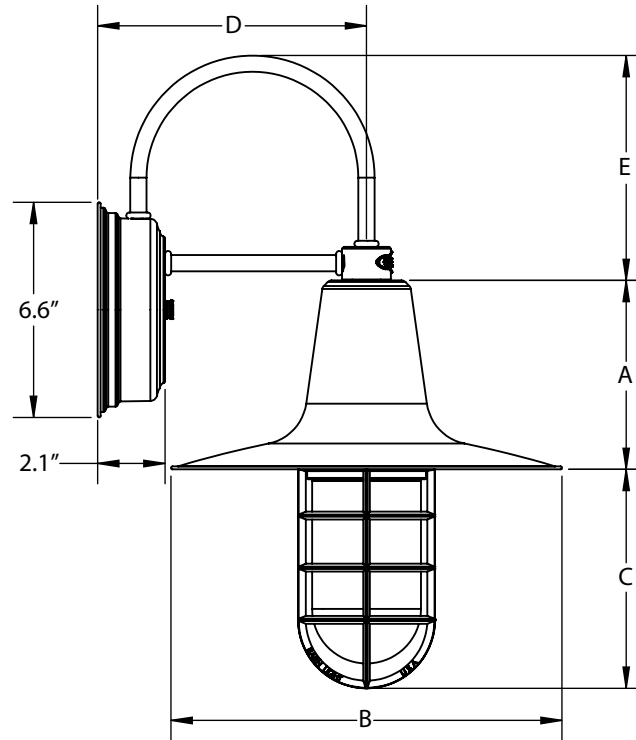MOUNTING DIMENSIONS

SHOWN WITH: OPTIONAL GUARD & GLASS ACCESSORY

SHADE CODE	HEIGHT (A)	DIAMETER (B)	EXTENSION (C)	PROJECTION (D)	ARM HEIGHT (E)
DCS12	5.75"	12"	6.7"	8.3"	6.9"
DCS14	6.50"	14"	6.2"	8.3"	6.9"
DCS16	7"	16"	5.6"	10.3"	8.3"

SPECIFICATIONS**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

(Plug-In Option CSA Listed for Dry Location Only)

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

UL CERTIFICATION

UL Listed Fixtures Available upon Request. Please Consult Factory for Additional Information.

CONSTRUCTION & FINISH (CONTINUED)

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

PORCELAIN FINISHES

Applied by Hand and Fired in a High Temperature Oven

BACKING PLATE

Hand-Spun from High Purity 3003-O Temper Aluminum

WALL SCONCE ARM

1/4" Nominal (0.50" Actual) Steel/Aluminum Mounting Arm

CORD & PLUG

Complete with 8 Feet of Cord, 2-Prong Polarized Plug and Inline On/Off Switch

CONSTRUCTION & FINISH

POWDER COAT SHADE

Hand-Spun from High Purity 3003-O Temper Aluminum

PORCELAIN SHADE

Hand-Spun from 20 Gauge Porcelain Steel

GALVANIZED SHADE

Hand Spun from High Quality Galvanized Steel

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC, 200W Max

COMPACT FLUORESCENT

Bi-Pin Base GU24 Socket, 120 VAC, 23W Max