

#### RFV 10 17 18 THE ORIGINAL™ VENTED WAREHOUSE SERIES

BARN LIGHT RLM FIXTURE FAMILY Max Weight: 10.0 lbs

PROJECT NAME	
PROJECT TYPE _	

BLE -A В D K G н J Order Example: BLE - G - VWHS16 - 600 - VS - G11 - 980 - NA - WC - 600 - DD - E26

#### **A - MOUNTING STYLE**

С	Cord Hung
CN	Chain Hung
F	Flush Mount
G	Gooseneck
S	Stem Mount

#### **B - SHADE SIZE**

THE ORIGINAL™ SHADE:

VWHS12 12" Shade 14" Shade VWHS14 VWHS16 16" Shade

#### C - SHADE FINISH

#### POWDER COAT FINISHES1:

100	Black
105	Textured Black
200	White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue
705	Navy
710	Cobalt Blue
715	Delphite Blue
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized
NATURAL	FINISHES:
995	Raw Copper

995	Raw Copper
996	Weathered Copper
997	Raw Brass
998	Weathered Brass
999	Oil-Rubbed Copper

#### **D - VENT OPTION**

VC	Circle Vent
VS	Narrow Slot Vent

#### E - MOUNTING

#### CSA LISTED CORD OPTIONS:

SBK	Standard Black
SWH	Standard White
CSB	Black Cloth
CSW	White Cloth
CSR	Red Cloth
CSBB	Black & Brown Cloth
CSRW	Red & White Cloth
CSGW	Gold & White Cloth
CSBG	Black & Gold Cloth
CSBW	Black & White Cloth
CSBP	Black & Pink Cloth
CSUW	Blue & White Cloth

#### NON-CSA LISTED CORD **OPTIONS:**

CBK	Black Cotton
CMG	Grey Cotton
CRZ	Red Chevron
TBK	Black Cotton Twist
TWH	White Cotton Twist
TBR	<b>Brown Cotton Twist</b>
TRD	Red Cotton Twist
TPT	Putty Cotton Twist
TBW	Black & White Twist
TRW	Red & White Twist
TBB	Brown & Beige Twist

#### CHAIN MOUNT OPTIONS:

CN36	3' of Chain <sup>2</sup>
CN48	4' of Chain <sup>2</sup>
CN60	5' of Chain <sup>2</sup>
CN72	6' of Chain <sup>2</sup>

#### FLUSH MOUNT OPTIONS:

FM<sup>2</sup>

#### GOOSENECK OPTIONS:

G1 <sup>2</sup>	G16 <sup>2</sup>
G2 <sup>2</sup>	G17
G3 <sup>2</sup>	G19 <sup>2</sup>
G4	G22
G5 <sup>2</sup>	G24
G6	G25
G7	G26 <sup>2</sup>
G8	G32

#### **E - MOUNTING (CONTINUED)**

GOOSENEC	K OPTIONS:
G9	G34 <sup>2</sup>
G10	G35 <sup>2</sup>
G11 <sup>2</sup>	G36 <sup>2</sup>
G12 <sup>2</sup>	G40 <sup>2</sup>
G13	G64 <sup>2</sup>
G14	G65 <sup>2</sup>
G15	

#### STEM MOUNT OPTIONS:

ST506	.5" Stem Mount, 6"2
ST512	.5" Stem Mount, 12"2
ST518	.5" Stem Mount, 18"2
ST524	.5" Stem Mount, 24"2
ST536	.5" Stem Mount, 36"2
ST548	.5" Stem Mount, 48"2
ST706	.75" Stem Mount, 6"
ST712	.75" Stem Mount, 12"
ST718	.75" Stem Mount, 18"
ST724	.75" Stem Mount, 24"
ST736	.75" Stem Mount, 36"
ST748	.75" Stem Mount, 48"

#### F - MOUNTING FINISH

Please Note: See **Section C** for all applicable Mounting Finish Options. 980-Brushed Aluminum is also available for Gooseneck and Stem mounting styles.

(I) If Cord Hung [C] Mounting Style, selection identifies canopy finish (II) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy

(III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish

(IV) If Gooseneck [G] Mounting Style, selection identifies gooseneck and backing plate finish

980 **Brushed Aluminum** 

#### G - CORDS3

Please Note: See Section E for all applicable CSA Listed Cord Options. Non-CSA Listed Cord Options for Chain Hung Mounting Style limited to: Black Cotton [CBK], Red Chevron [CRZ] and Grey Cotton [CMG]

Not Applicable NA

#### H - WIRE CAGE

NA	None
WC	Wire Cage <sup>2</sup>

#### I - WIRE CAGE FINISH

Please Note: See Section C for Wire Cage Finish Options, if no Wire Cage is selected in Section H, select NA. (I) Wire Cage not available in Natural Finishes

SPS-0020

NA Not Applicable

#### J - MOUNTING ACCESSORY

None/Not Applicable
Hang Straight Canopy <sup>2,4</sup>
Heavy Duty Stem Mount
Canopy <sup>2,4</sup>
Heavy Duty Backing Plate <sup>2,5</sup>
Dusk-to-Dawn Photocell⁵
Decorative Backing Plate
Cover <sup>6</sup>
Decorative Backing Plate

Cover & Hex Cover<sup>6</sup>


#### **K - LIGHT SOURCE**

E26 200 Watt Max GU24 24 Bi-Pin, 23W Max<sup>7</sup>


IMPORTANT: (1) All Powder Coat finished shades, Galvanized excluded, feature a white interior (2) Not available in Natural Finishes (3) Only applicable if Chain Hung Mounting Style selected in Section A, select NA if another Mounting Style is selected (4) Only applicable with Stem Mount Mounting Style (5) Only applicable with Gooseneck Mounting Style (6) Accessory will match the Natural Finish selected in Section C, unless powder coat finish is selected (7) Fixtures configured with a GU24 socket are non-returnable

#### **MOUNTING STYLE**


### **CHAIN HUNG PENDANT (CN)**

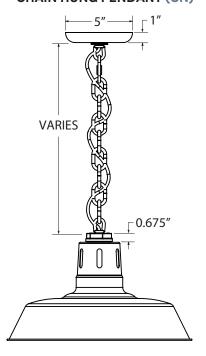


#### **CORD HUNG PENDANT (C)**

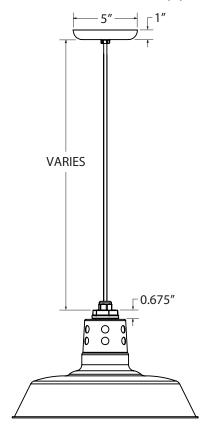


#### **FLUSH MOUNT (F)**



#### **STEM MOUNT PENDANT (S)**




#### **GOOSENECK (G)**

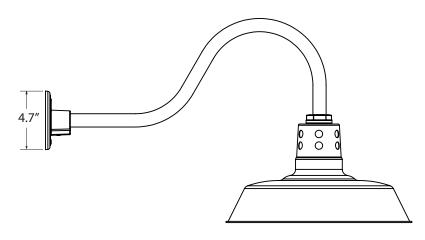

SHOWN WITH: G22 GOOSENECK ARM

#### **AVAILABLE SHADE SIZES**



SHADE CODE	HEIGHT (A)	DIAMETER (B)
WHS12	7″	12"
WHS14	7.5"	14"
WHS16	7.75"	16"

#### **VENT OPTION**

## 

# NARROW SLOT VENT (VS) 6 Narrow Slot Vents total on shade 1.438" .500"

#### **LIGHT SOURCE**

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS *Avg. value, actual value dependent on bulb used	CRI	VOLTAGE	DIMMING		
INCANDESCENT (MED E26)							
E26	200W Max	*3000	*100	120 VAC	Bulb Dependant		
COMPACT FLOURESCENT (GU24 CFL)							
GU24	23W Max	*1600	*75	120 VAC	Bulb Dependant		

#### **SPECIFICATIONS**

#### **MOUNTING**

STEM

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

GOOSENECK

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck

CORE

Cord-hung Pendants Include 7' Of Standard Cord Or 5' Of Cotton Cord, +/- For Socket Orientation

#### **SHADE & FINISHES**

ORIGINAL™ SHADE

Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

#### **CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR DAMP LOCATIONS

Includes Gooseneck, Chain, Stem, Flush and Select Cord Mounting Styles

CSA LISTED FOR DRY LOCATIONS

**Includes Select Cord Mounting Styles** 

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions