




SPS-0207 REV B

VANGUARD 8-LIGHT CHANDELIER

JOB NAME: _____ FIXTURE TYPE: _____



BLE - S - CGG - CH005 - _____ - _____ - _____ - _____ - _____ - _____ - _____

A B C D E F


G

Order Example: BLE - S - CGG - CH005 - 615 - ST524 - HDSMC - CGG - 615 - FST - E26

<p>A - FINISHES</p> <p><i>POWDER COAT FINISHES:</i></p> <p>100 Black 105 Textured Black 106 Matte Black 200 White 206 Matte White 300 Dark Green 307 Emerald Green 311 Jadite 370 Mint 380 Chartreuse 390 Teal 400 Barn Red 420 Orange 470 Watermelon 480 Blush Pink 490 Magenta 495 Sherbet Orange 500 Buttery Yellow 570 Sunflower 600 Bronze 601 Chocolate 605 Rust 615 Oil-Rubbed Bronze 700 Royal Blue 705 Navy 710 Cobalt Blue 715 Delphite Blue 790 Lavender</p>	<p>A - FINISHES (CONTINUED)</p> <p><i>POWDER COAT FINISHES:</i></p> <p>800 Industrial Grey 805 Charcoal Granite 810 Graphite 975 Galvanized</p> <p>B - STEM LENGTH</p> <p><i>STEM MOUNT OPTIONS:</i></p> <p>ST506 .5" Stem Mount, 6" ST512 .5" Stem Mount, 12" ST518 .5" Stem Mount, 18" ST524 .5" Stem Mount, 24" ST536 .5" Stem Mount, 36" ST548 .5" Stem Mount, 48"</p> <p>C - CANOPY</p> <p>SC Standard Canopy HSC Hang Straight Canopy HDSMC Heavy Duty Stem Mount Canopy</p>	<p>D - CAST GUARD OPTION</p> <p>CGG Standard Cast Guard TGG Heavy Duty Cast Guard WGG Wire Guard</p> <p>E - CAST GUARD FINISH</p> <p><i>Please Note: See Section A for all applicable Cast Guard Finish Options.</i></p>	<p>F - GLASS OPTIONS</p> <p>CLR Clear Glass FST Frosted Glass RIB Ribbed Glass SMK Smoke Crackle Glass BLU Blue Glass RED Red Glass AMB Amber Glass GRN Green Glass</p> <p>G - LIGHT SOURCE</p> <p>E26 75 Watt Max GU24 24 Bi-Pin CFL, 18W Max</p>
---	--	--	--

IMPORTANT:

MOUNTING DIMENSIONS

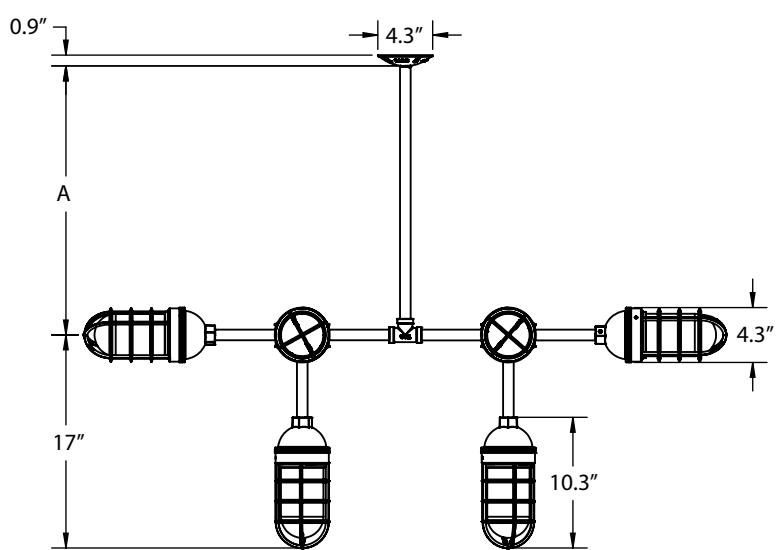


STEM LENGTH	HEIGHT (A)
06 (6" Stem)	6.2"
12 (12" Stem)	12.2"
18 (18" Stem)	18.2"
24 (24" Stem)	24.2"
36 (36" Stem)	36.2"
48 (48" Stem)	48.2"

CANOPY VARIATIONS

<p>HANG STRAIGHT CANOPY (HSC)</p>	<p>HEAVY DUTY STEM MOUNT CANOPY (HDSMC)</p>
-----------------------------------	---

SHOWN ABOVE WITH: STANDARD CANOPY

MOUNTING DIMENSIONS (CONTINUED)

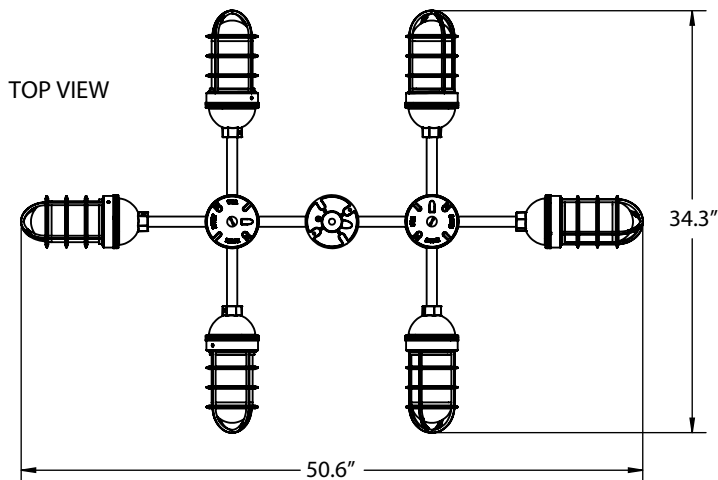

SPECIFICATIONS

CERTIFICATIONS, LISTINGS & WARRANTY

MADE IN THE USA
 Manufactured and Hand-Crafted in our 60,000 Square Foot Facility
 Located in Titusville, FL

CSA LISTED FOR DAMP LOCATIONS

LIMITED WARRANTY
 For Additional Information on our Limited Warranty, Please See
 Our Terms & Conditions

LIGHT SOURCE

INCANDESCENT
 Medium Base E26 Socket, 120 VAC, 75 Watt Max

COMPACT FLUORESCENT
 Bi-Pin Base GU24 Socket, 120 VAC, 18 Watt Max

CONSTRUCTION & FINISH

STEM
 1/2" Nominal (0.84" Actual) Aluminum Mounting Stem. Custom
 Lengths Available Upon Request.

POWDER COAT FINISHES
 Polyester Powder Coat Finishes are Electro-Staticly Applied and
 Thermocured

MAX FIXTURE WEIGHT
 10 lbs