



SPS-0322 REV B

WALLABY SERIES

JOB NAME: _____ FIXTURE TYPE: _____



BLE - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

A B C D E F G

_____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

H I J K L

Order Example: BLE - G - ULA16 - 600 - G22 - 980 - NA - NA - 975 - FST - NA - LED16.8 - 2700K

A - MOUNTING STYLE

- C** Cord Hung
CN Chain Hung
F Flush Mount
G Gooseneck
S Stem Mount

B - SHADE & SHADE SIZE**WALLABY:**

- ULA12** 12"
ULA14 14"
ULA16 16"

C - SHADE FINISH**POWDER COAT FINISHES¹:**

- 100** Black
105 Textured Black
200 White
300 Dark Green
307 Emerald Green
311 Jadite
370 Mint
380 Chartreuse
390 Teal
400 Barn Red
420 Orange
470 Watermelon
480 Blush Pink
490 Magenta
495 Sherbet Orange
500 Buttery Yellow
570 Sunflower
600 Bronze
601 Chocolate
605 Rust
615 Oil-Rubbed Bronze
700 Royal Blue
705 Navy
710 Cobalt Blue
715 Delphite Blue
790 Lavender
800 Industrial Grey
805 Charcoal Granite
810 Graphite
975 Galvanized

NATURAL METALS²:

- 995** Raw Copper
996 Weathered Copper
997 Raw Brass
998 Weathered Brass
999 Oil-Rubbed Copper

D - MOUNTING

Please Note: If Flush Mount [F] is selected in Section A, please select **NA**

- NA** Not Applicable

CSA LISTED CORD OPTIONS:

- SBK** Standard Black
SWH Standard White
CSB Black Cloth
CSW White Cloth
CMG Grey Cotton
CSR Red Cloth
CRZ Red Chevron
CSBB Black & Brown Cloth
CSRW Red & White Cloth
CSGW Gold & White Cloth
CSBG Black & Gold Cloth
CSBW Black & White Cloth
CSBP Black & Pink Cloth
CSUW Blue & White Cloth

CHAIN MOUNT OPTIONS:

- CN36** 3' of Chain³
CN48 4' of Chain³
CN60 5' of Chain³
CN72 6' of Chain³

GOOSENECK OPTIONS:

- | | | |
|--------------------------|------------------------|------------------------|
| G1³ | G11³ | G25 |
| G2³ | G12³ | G26³ |
| G3^{3,11} | G13 | G32 |
| G4¹¹ | G14 | G34³ |
| G5³ | G15 | G35³ |
| G6 | G16³ | G36³ |
| G7 | G17 | G40³ |
| G8 | G19³ | G64³ |
| G9 | G22 | G65³ |
| G10 | G24 | |

STEM MOUNT OPTIONS:

- ST506** .5" Stem Mount, 6"³
ST512 .5" Stem Mount, 12"³
ST518 .5" Stem Mount, 18"³
ST524 .5" Stem Mount, 24"³
ST536 .5" Stem Mount, 36"³
ST548 .5" Stem Mount, 48"³
ST706 .75" Stem Mount, 6"
ST712 .75" Stem Mount, 12"
ST718 .75" Stem Mount, 18"
ST724 .75" Stem Mount, 24"
ST736 .75" Stem Mount, 36"
ST748 .75" Stem Mount, 48"

E - MOUNTING FINISH

Please Note: See Section C for Finish Options. 980-Brushed Aluminum is also available for Gooseneck and Stem mounting styles.

- (I) If Cord Hung [C], selection identifies canopy finish
 (II) If Chain Hung [CN] Mounting Style, selection identifies chain and canopy finish. Natural Metals are not applicable
 (III) If Stem Mount [S] Mounting Style, selection identifies stem and canopy finish
 (IV) If Flush Mount [F] Mounting Style, selection identifies canopy finish. Natural Metals are not applicable

- 980** Brushed Aluminum

F - CORDS⁴

- NA** Not Applicable

Please Note: See Section D for all applicable CSA Listed Cord Options

G - CAP OPTION⁵

- NA** No Cap/Not Applicable
CAP Cap⁶

H - CAST GUARD FINISH

Please Note: See Section C for all applicable Cast Guard Finish Options

- (I) Cast Guard not available in Natural Metals
 (II) Fixture manufactured with TGG guard only.

I - GLASS OPTION

- CLR** Clear Glass
FST Frosted Glass
RIB Ribbed Glass
SMK Smoke Crackle Glass
BLU Blue Glass
RED Red Glass
AMB Amber Glass
GRN Green Glass

J - MOUNTING ACCESSORY

Please Note: Mounting Accessories below are only applicable with select Mounting Styles. Please refer to product listings on our website for further detail.

- NA** None/Not Applicable
HSC Hang Straight Canopy^{3,7}
HDSMC Heavy Duty Stem Mount Canopy^{3,7}
HDBP Heavy Duty Backing Plate³
DD Dusk-to-Dawn Photocell¹²
DBPC Decorative Backing Plate Cover¹²
DCC Decorative Canopy Cover^{7,8}

K - LIGHT SOURCE

- E26** 100 Watt Max
GU24 GU24 Bi-Pin, 18W Max⁹
LED16.8 16.8W LED, 1600 Lumen


L - COLOR TEMPERATURE¹⁰

- NA** Not Applicable
2700K 2700K, Warm White
3000K 3000K, Neutral White
3500K 3500K, Bright White
4000K 4000K, Cool White


IMPORTANT: (1) All Powder Coat finished shades, Galvanized excluded, feature a white interior (2) Natural Metals have a longer estimated manufacturing time, please check the website for exact lead time. There are no returns accepted on Natural Metals (3) Not available in Natural Metals (4) Only applicable if Chain Hung Mounting Style is selected in Section A (5) Cap not available if Chain Hung mounting style selected in Section A (6) Cap Finish will match shade finish selected in Section C (7) Only applicable if Stem Mounting Style selected in Section A (8) Only available if Natural Metal is selected in Section C (9) Fixtures configured with a GU24 socket are non-returnable (10) Only applicable if LED16.8 Light Source is selected in Section K, select NA if non-LED source selected (11) Not available in 16" Shade size (12) Not available with G19, G36, & G40 Gooseneck option

MOUNTING STYLE


CHAIN HUNG PENDANT (CN)

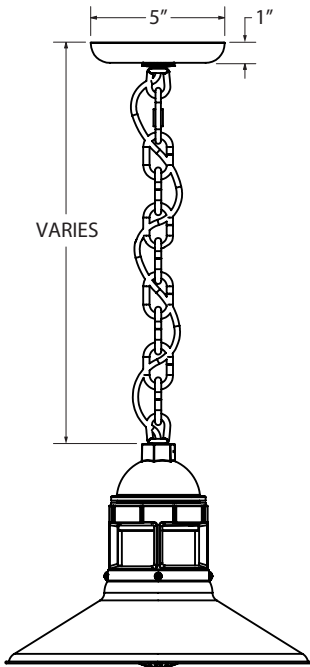


CORD HUNG PENDANT (C)

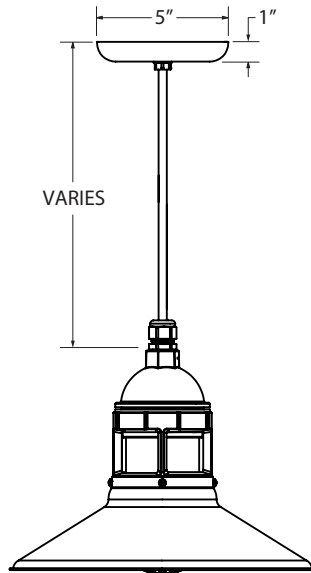


STEM MOUNT PENDANT (S)

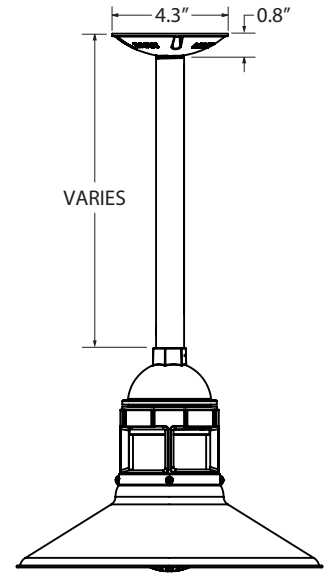

FLUSH MOUNT (F)




GOOSENECK (G)

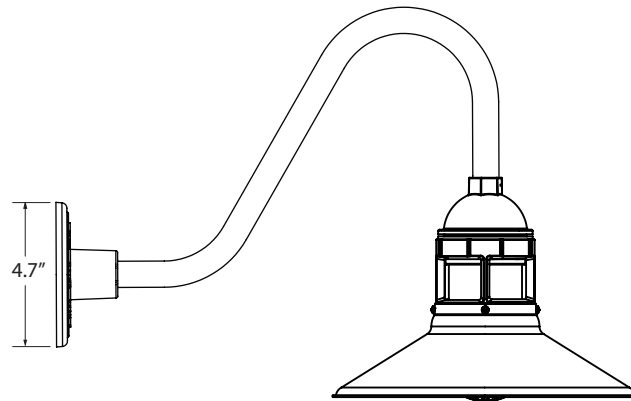


SHOWN WITH: G26 GOOSENECK ARM

LUMINAIRE DIMENSIONS



SHADE CODE	HEIGHT (A)	DIAMETER (B)
ULA12	9.3"	12"
ULA14	10"	14"
ULA16	10.8"	16"



SHOWN WITH OPTIONAL CAP SECTION - G

SPECIFICATIONS**CERTIFICATIONS, LISTINGS & WARRANTY**

MADE IN THE USA

Manufactured and Hand-Crafted in Our 60,000 Square Foot Facility Located in Titusville, FL

CSA LISTED FOR WET LOCATIONS

Includes All Gooseneck, Stem and Flush Mounting Styles

CSA LISTED FOR DAMP LOCATIONS

Includes All Chain and Cord Hung Mounting Styles

LIMITED WARRANTY

For Additional Information on Our Limited Warranty, Please See Our Terms & Conditions

OPERATING TEMPERATURE

-30°C to 40°C

SHADE & FINISHES

POWDER COAT SHADE

Hand-Spun from High Purity 0.050" Thick 3003-O Temper Aluminum

POWDER COAT FINISHES

Polyester Powder Coat Finishes Are Electro-Statically Applied and Thermocured

COPPER

Hand-Spun from High Purity .032 Thick C11000-O60 ETP Copper

BRASS

Hand-Spun from High Purity .050" Thick C2600-O60 Brass

MOUNTING

STEM

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom Lengths Available upon Request.

GOOSENECK

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck

CORD

Cord-Hung Pendants Include 8' of Cord, +/- For Socket Orientation

CHAIN

4-Gauge Chain Complete with Quick Link for On-Site Adjustments to Chain's Length

MAX FIXTURE WEIGHT

10 lbs

LIGHT SOURCE

INCANDESCENT

Medium Base E26 Socket, 120 VAC, 100W Max

COMPACT FLUORESCENT

Bi-Pin Base GU24 Socket, 120 VAC, 18W Max

LED16.8 LIGHT SOURCE

LED TYPE: CREE CXB SERIES COB

INITIAL LUMENS DELIVERED: UP TO 1600 LUMENS

L90 (11K) > 61,000 HOURS

AVAILABLE CCT: 2700K, 3000K, 3500K, 4000K
Custom Temperatures Available upon Request

90+ CRI (R9 TYPICAL 60)

80+ CRI and 95+ CRI (R9 Typical 85) Available upon Request

2 STEP MACADAMS ELLIPSE

EFFICACY: UP TO 95 LPW

High Efficacy Available upon Request, Consult Factory for Additional Information

LED16.8 ELECTRICAL/LED DRIVER

DRIVER TYPE: ERP EBRO20U-0400-42

DRIVE CURRENT: 400mA

POWER FACTOR > 0.9

EFFICIENCY: UP TO 85% TYPICAL

INPUT VOLTAGE: 120 VAC

CLASS 2 POWER SUPPLY

LED DRIVER LIFETIME: > 100,000 HOURS (@ 25 DEG C AMBIENT)

IP20 MINIMUM RATING CASE WITH SILICONE-BASED POTTING

PROTECTIONS

Output Open Load, Over-Current and Short-Circuit (hiccup), and Over-Temperature with Auto Recovery

CONDUCTED AND RADIATED EMI

Compliant with FCC CFR Title 47 Part 15 Class B (120 VAC), Class A (277 VAC) and EN55015 (CISPR 15) at 220, 230 and 240 VAC

DIMMING

LED 16.8

Triac & ELV Dimming at 120VAC, Able to Dim down to 1%.
Dependent on Specific Dimmer.
0-10V Dimming Available upon Request.

COMPATIBLE DIMMERS

Consult Factory for Additional Information on Dimming