


Inline Cross Arms are constructed of square steel tubing (11G) and can mount over 2-3/8", 3", 3-1/2", 4" and 5" diameter of Pole or Tenon. The arms are secured with 3/8" stainless steel Allen Sets Screws and use black plastic snap-in end caps. Please, contact NLS for custom configuration or other mounting options.

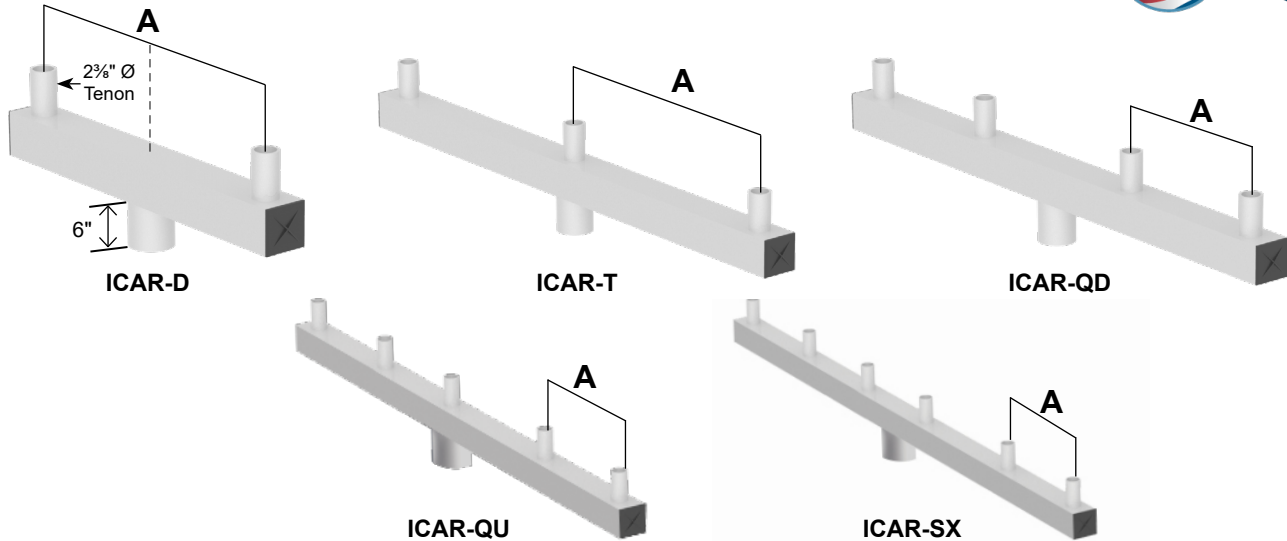

Cat #	Tenon to Tenon (Distance A)	Pole Diameter To Fit Over	Color
Inline Cross Arm Round Double ( <b>ICAR-D</b> )	36" (36)	2 3/8" Ø (238R)	Bronze (BRZ) White (WHT) Silver (SVR) Black (BLK) Green (GRN) Hunter Green (HGN) Graphite (GPH) Grey (GRY) Custom (CS) Galvanized (GLV)
	48" (48)		
	60" (60)		
Inline Cross Arm Round Triple ( <b>ICAR-T</b> )	24" (24)	3 1/2" Ø (312R)	
	30" (30)		
	36" (36)		
Inline Cross Arm Round Quad ( <b>ICAR-QD</b> )	24" (24)	5" Ø (5R)	
	30" (30)		
Inline Cross Arm Round Quintuple ( <b>ICAR-QU</b> )	30" (30)		
Inline Cross Arm Round Sextuple ( <b>ICAR-SX</b> )	36" (36)		

**ROUND EPA VALUES**


Double	Pole OD	Dist. A	EPA
ICAR-D	2 3/8" Ø	36"	1.54
ICAR-D	2 3/8" Ø	48"	1.94
ICAR-D	2 3/8" Ø	60"	2.34
ICAR-D	3" Ø	36"	1.56
ICAR-D	3" Ø	48"	1.96
ICAR-D	3" Ø	60"	2.36
ICAR-D	3.5" Ø	36"	1.57
ICAR-D	3.5" Ø	48"	1.97
ICAR-D	3.5" Ø	60"	2.37
ICAR-D	4" Ø	36"	1.59
ICAR-D	4" Ø	48"	1.99
ICAR-D	4" Ø	60"	2.39
ICAR-D	5" Ø	36"	1.62
ICAR-D	5" Ø	48"	2.02
ICAR-D	5" Ø	60"	2.42

Triple	Pole OD	Dist. A	EPA
ICAR-T	2 3/8" Ø	36"	1.99
ICAR-T	2 3/8" Ø	48"	2.39
ICAR-T	2 3/8" Ø	60"	2.79
ICAR-T	3" Ø	36"	2.01
ICAR-T	3" Ø	48"	2.41
ICAR-T	3" Ø	60"	2.81
ICAR-T	3.5" Ø	36"	2.03
ICAR-T	3.5" Ø	48"	2.43
ICAR-T	3.5" Ø	60"	2.83
ICAR-T	4" Ø	36"	2.04
ICAR-T	4" Ø	48"	2.44
ICAR-T	4" Ø	60"	2.84
ICAR-T	5" Ø	36"	2.08
ICAR-T	5" Ø	48"	2.48
ICAR-T	5" Ø	60"	2.88

Quad	Pole OD	Dist. A	EPA
ICAR-QD	2 3/8" Ø	48"	2.39
ICAR-QD	2 3/8" Ø	60"	2.79
ICAR-QD	3" Ø	48"	2.41
ICAR-QD	3" Ø	60"	2.81
ICAR-QD	3.5" Ø	48"	2.43
ICAR-QD	3.5" Ø	60"	2.83
ICAR-QD	4" Ø	48"	2.44
ICAR-QD	4" Ø	60"	2.84
ICAR-QD	5" Ø	48"	2.48
ICAR-QD	5" Ø	60"	2.88
ICAR-QU	2 3/8" Ø	48"	4.50
ICAR-QU	2 3/8" Ø	60"	5.30
ICAR-QU	3" Ø	48"	4.51
ICAR-QU	3" Ø	60"	5.31
ICAR-QU	3.5" Ø	48"	4.53
ICAR-QU	3.5" Ø	60"	5.33
ICAR-QU	4" Ø	48"	4.55
ICAR-QU	4" Ø	60"	5.35
ICAR-QU	5" Ø	48"	4.58
ICAR-QU	5" Ø	60"	5.38

Sextuple	Pole OD	Dist. A	EPA
ICAR-SX	2 3/8" Ø	30"	5.55
ICAR-SX	2 3/8" Ø	36"	6.55
ICAR-SX	3" Ø	30"	5.57
ICAR-SX	3" Ø	36"	6.57
ICAR-SX	3.5" Ø	30"	5.58
ICAR-SX	3.5" Ø	36"	6.58
ICAR-SX	4" Ø	30"	5.60
ICAR-SX	4" Ø	36"	6.60
ICAR-SX	5" Ø	30"	5.63
ICAR-SX	5" Ø	36"	6.63

Inline Cross Arms are constructed of square steel tubing (11G) and can mount over 2-3/8", 3", 3-1/2", 4" and 5" diameter of Pole or Tenon. The arms are secured with 3/8" stainless steel Allen Sets Screws and use black plastic snap-in end caps. Please, contact NLS for custom configuration or other mounting options.

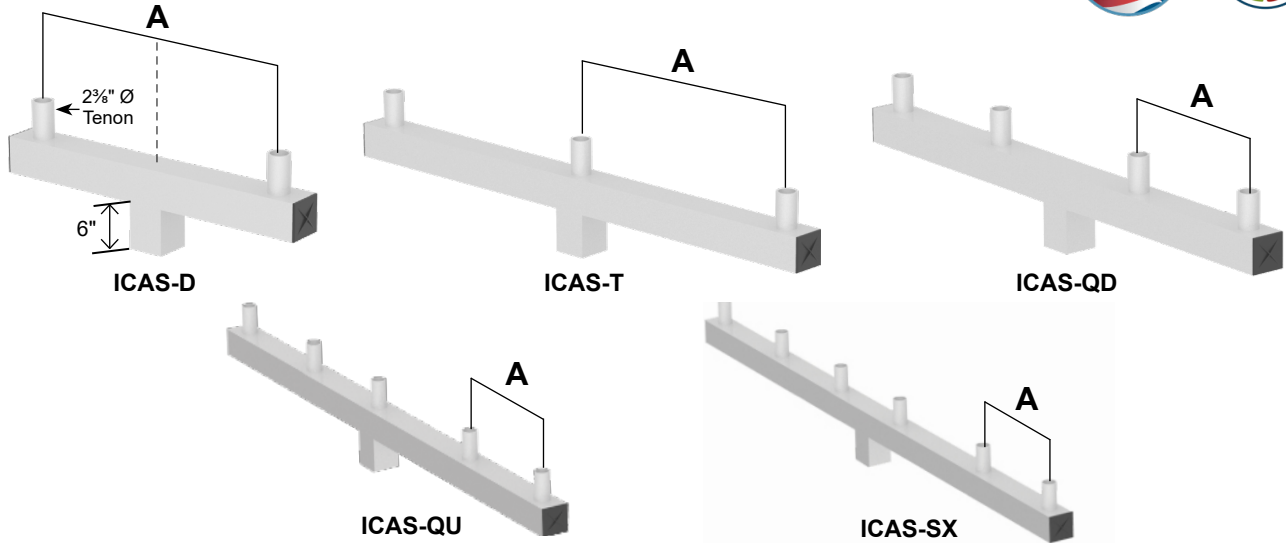

Cat #	Tenon to Tenon (Distance A)	Pole Diameter To Fit Over	Color
Inline Cross Arm Square Double ( <b>ICAS-D</b> )	36" ( <b>36</b> )	4" SQ ( <b>4S</b> )	Bronze ( <b>BRZ</b> ) White ( <b>WHT</b> ) Silver ( <b>SVR</b> ) Black ( <b>BLK</b> ) Green ( <b>GRN</b> ) Hunter Green ( <b>HGN</b> ) Graphite ( <b>GPH</b> ) Grey ( <b>GRY</b> ) Custom ( <b>CS</b> ) Galvanized ( <b>GLV</b> )
	48" ( <b>48</b> )		
	60" ( <b>60</b> )		
Inline Cross Arm Square Triple ( <b>ICAS-T</b> )	24" ( <b>24</b> )	5" SQ ( <b>5S</b> )	
	30" ( <b>30</b> )		
Inline Cross Arm Square Quad ( <b>ICAS-QD</b> )	24" ( <b>24</b> )		
Inline Cross Arm Square Quintuple ( <b>ICAS-QU</b> )	30" ( <b>30</b> )		
Inline Cross Arm Square Sextuple ( <b>ICAS-SX</b> )	36" ( <b>36</b> )		

### SQUARE EPA VALUES

Double	Pole OD	Dist. A	EPA
ICAS-D	4" Ø	36"	1.66
ICAS-D	4" Ø	48"	2.06
ICAS-D	4" Ø	60"	2.46
ICAS-D	5" Ø	36"	1.71
ICAS-D	5" Ø	48"	2.11
ICAS-D	5" Ø	60"	2.51

Triple	Pole OD	Dist. A	EPA
ICAS-T	4" Ø	24"	2.12
ICAS-T	4" Ø	30"	2.52
ICAS-T	5" Ø	24"	2.17
ICAS-T	5" Ø	30"	2.57

Quad	Pole OD	Dist. A	EPA
ICAS-QD	4" Ø	24"	2.97
ICAS-QD	5" Ø	24"	3.02
ICAS-QU	4" Ø	30"	4.62
ICAS-QU	4" Ø	36"	5.42
ICAS-QU	5" Ø	30"	4.67
ICAS-QU	5" Ø	36"	5.47

Sextuple	Pole OD	Dist. A	EPA
ICAS-SX	4" Ø	30"	5.68
ICAS-SX	4" Ø	36"	6.68
ICAS-SX	5" Ø	30"	5.73
ICAS-SX	5" Ø	36"	6.73