




SDKL LED DOCK LIGHT



PRODUCT DESCRIPTION

The SDKL dock light has rugged die-cast aluminum housing. High impact resistant with appropriate structure design. Wattage and 3000K/4000K/5000K selectable. Adjustable pole arm mount. Industrial safety yellow finish is standard. Ideal for energy-efficient, low maintenance loading dock lighting.

FEATURE



- Die-cast aluminum housing
- Wattage and CCT selectable
- High impact resistant
- Adjustable pole arms mount

ELECTRICAL SYSTEM

- Input voltage: 120-277V, 50/60Hz
- Power Factor: >0.9
- Total Harmonic Distortion: <20% at full load
- Working Temperature: -20~40°C (-4~104°F)

SPECIFICATION

Two Pole Arm

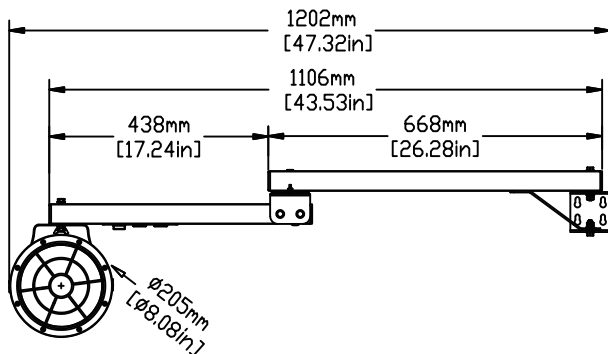

PERFORMANCE

CRI

80

CCT

3000K、4000K、5000K

Dimming

Not Dimming

Projected Lifetime

L70 -100,000 Hours

Working Temperature

-40-104°F (-40-40°C)

Certifications

- cETLus Listed
- IP65 rated
- IK10 rated
- RoHS compliant

Ordering Information

Example: SDKL-SP-SW1-YL

| Name | Watts | CCT | Voltage | Finish |
|------|----------------------------------------------|---------------------------------------------------------|----------------------------|--------------------------|
| SDKL | SP- Selectable Power 30W/50W ¹ | SW - Selectable White 3000K/4000K/5000K ² | 1- 120-277V 6- 347/480V | YL - Yellow ³ |

Notice:

1. 50W is default setting, If need other wattage, please contact Customer Service in advance to change the setting in factory or change the setting in the field
2. 4000K is default setting. If need other CCT please contact Customer Service in advance to change the setting in factory or change the setting in the field.
3. Yellow finish is standard. Custom colors might be available for an additional fee. Please check with Customer Service for more information.

Accessories (Ordered separately)




SDKL-BKT2

Two pole bracket

PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

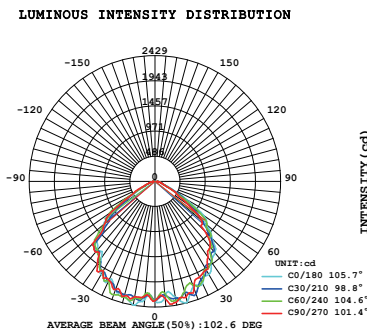

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.


| Watts | Nominal Lumen | CCT | CRI | LPW |
|-------|---------------|-------|-----|-----|
| 30W | 3300lm | 4000K | >80 | 110 |
| 50W | 5500lm | 4000K | >80 | 110 |



Tempered Glass Wire Guard



CCT and Wattage Selectable



Adjustable Angle

Warranty

Five year limited warranty.

Specifications subject to change without notice.