



USE OF PRODUCT

The 3" PRIME Wall Wash is a small aperture fixture with shallow height that may be used in residential and commercial applications. Available in die cast trims, with an assortment of color temperatures, optics and dimmable drivers.

LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. LED engine is accessible from below ceiling.

FRAME CONSTRUCTION

IC rated housing constructed from 16 gauge heavy duty powder coated cold rolled steel frame. Junction box with 1/2" knock-outs. Butterfly bracket included to accommodate adjustable bar hangers or C-channel (ordered separately).

ADJUSTMENT

- Light engine locked at 25° tilt, consult factory for other tilt setting.
- Housing provides for 359° locking rotation
- Aperture collar adjusts 15°± horizontally within frame for square ceiling alignment.

- Collar notch allows for easy alignment for square applications.
- Aperture collar compatible up to 1½" ceiling thickness.
- Consult factory for made to order aperture collars exceeding 1½".

OPTICAL LENS & FILTERS (Field Replaceable)

Field replaceable optical lens available in 12°, 22°, 27°, 35° and 45°. Easily achieve narrow spot to wide flood beam pattern.

DIMMING

Available in 8 driver selections. (ID) Standard all-inclusive ELV(120V), Triac(120V), and 0-10V(120-277V) dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LDE5) Lutron Hi-Lume 5% Ecosystem, 120-277V. (LTE) Hi-Lume 1% 2-wire, 120V. (L3DA) Hi-Lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V. Driver accessible from below ceiling.

THERMAL MANAGEMENT

Ambient temperatures at fixture location should not exceed -20° to 40°C.

EMERGENCY BATTERY

Optional emergency battery available for a minimum of 90 minutes with remote test switch in 800 delivered lumens.

TRIM

Trim available in die cast or spun aluminum. Consult factory for made to order finishes. Flanged trim is compatible with all ceiling materials.

LABELS/COMPLIANCE/WARRANTY

- CSA Listed for US and Canada
- Dry/Damp/Wet location rated.
- Energy Star
- Title 24, JA8 Compliant
- 5 Year limited warranty



ORDERING INFORMATION

RPM

Series	Aperture Size	Lumens	Color Temperature	Voltage	Dimming	Optical Lens	Filter
RPA PRIME Series	3 - 3"	8L - 810 lm	27 - 2700K	UNV - 120-277	ID ² - Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive)	12 - 12°	None - Leave blank
		11L - 1110 lm	30 - 3000K	120 - 20V	PEQ0 - Lutron Hi-Lume Premier Ecosystem 0.1% w/ soft on, fade to black dimming	22 - 22°	F - Frosted filter
		13L - 1340 lm	35 - 3500K	347 - 347V	LDE1 ³ - Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming	27 - 27°	H - Honey comb
		17L ¹ - 1700 lm	40 - 4000K		LTE ³ - Lutron Hi-Lume 1% 2-wire L3DA - Hi-lume 1% EcoSystem/3-Wire L3D Driver EEI ³ - eldoLED Eco 1% Dim (0-10V) EDIO ^{3,4} - eldoLED Solo 0.1% Dim (0-10V) EDID ^{3,4} - eldoLED Solo 0.1% Dim (DALI)	35 - 35°	S - Solite filter
						45 - 45°	L - Linear filter

Housing Type	Aperture	Frame Accessories	Collar	Options
IC - IC Air-tight New Construction NC - Non-IC New Construction	SFW - Square Flanged Wall Wash	AH - Adjustable bar hanger C - C Channel bar hanger B - Flat bar hanger	Blank - 1.5" Depth 20 - 2" Depth 30 - 3" Depth MTO - Made to order	ER8 ² - Emergency battery with remote switch (800 Lumens) CP - Chicago Plenum

TRIM ORDERING INFORMATION

Aperture Size / Shape / Trim Type / Style	Bevel Opening	Bevel	Flange	Options
3SFA - 3" Square Flange Accent	Die Cast CL - Die cast large opening	W - White B - Black BZ - Bronze C - Clear MTO - Made to order	W - White B - Black BZ - Bronze MTO - Made to order	WL - Wet Location
	Spun Aluminum (Self Flanged) AL - Spun alum. large opening	W - White H - Haze C - Clear MTO - Made to order		WL - Wet Location


- Notes
1. Not Available in IC
 2. Intelligent Drive is the standard driver.
 3. Ceiling access required.
 4. Must specify logarithmic or inear eldoLED diver.

LUMEN CHART


Wattage	Delivered Lumens	Voltage	CRI
10W	810 lm	120 - 277V	93+
14W	1110 lm	120 - 277V	93+
20W	1340 lm	120 - 277V	93+
30W	1700 lm	120 - 277V	93+

*Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.
 **Lumens will vary based on CCT, optical lens, and bevel finish.

TRIM THICKNESS





Die Cast




Spun Aluminum

TRIM DIMENSION


Accent Opening

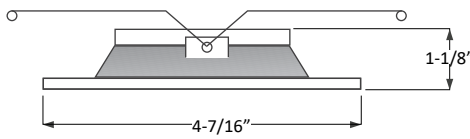


MODULE/HEATSINK, LED HOLDER & FILTER DIMENSION




Module & Heatsink




LED Holder (Body)



Optics



Filter


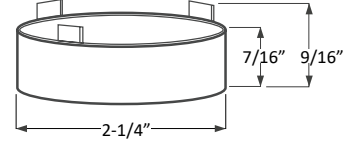


LED Holder (Head)



HOUSING DIMENSION




NC - Non-IC New Construction

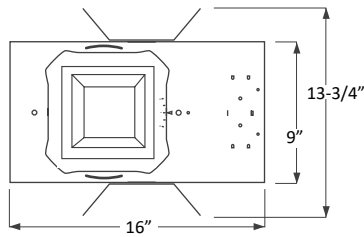

IC - Air-tight New Construction

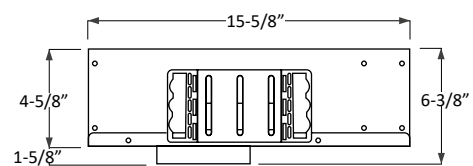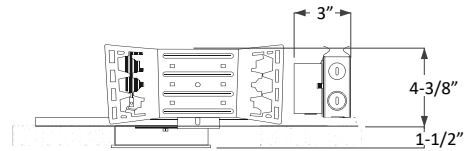

COLLAR DEPTH PER CEILING THICKNESS

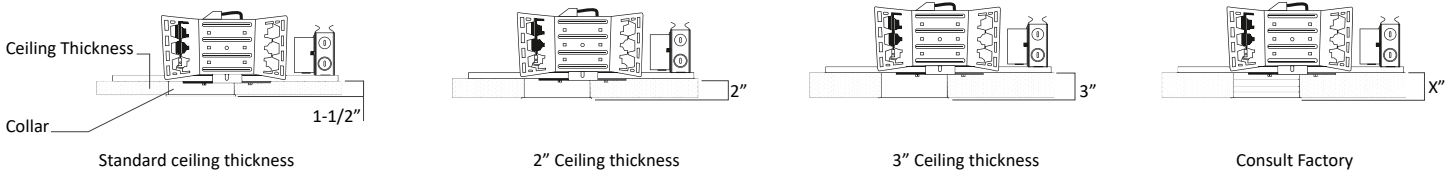

FRAME ACCESSORIES

<p>B Flat Bar Hanger</p>	<p>27"</p> <p>1/2"</p>
<p>C C Channel Bar Hanger</p>	<p>25-3/16"</p> <p>1-6/16"</p>
<p>AH Adjustable Bar Hanger</p>	<p>14 1/4" - 25 1/2"</p> <p>1 1/2"</p> <p>0 - 90° Tilt</p> <p>Locked at 90°</p>