



WARM DIM

USE OF PRODUCT

The 4" Prime Downlight Series is the ideal product for architectural energy efficient lighting in commercial and residential applications. Available in an assortment of color temperatures, optics, lumen outputs, and dimmable driver options.

LED ENGINE

LED engine available with Warm-Dim standard 90+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. Light engine provides a quick disconnect with locking strain relief to housing.

FRAME CONSTRUCTION

Constructed from 16 gauge heavy duty powder coated cold rolled steel frame with a large access junction box.

ADJUSTMENT

- Housing provides for 360° locking rotation
- Aperture collar adjusts 15°± horizontally within frame for square ceiling alignment
- Collar notch allows for easy alignment for square applications.
- Aperture collar compatible up to 1½" ceiling thickness.
- Accommodation for 2" or 3" ceiling thickness available upon request.

OPTICS

Field replaceable optical lens available in 18°, 30°, 50°, and 80°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

DIMMING

Available in 8 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LTE) Lutron Hi-Lume 1% 2-wire, 120V. (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

THERMAL MANAGEMENT

Ambient temperatures at fixture location should not exceed -20° to 40°C.

EMERGENCY BATTERY

Optional emergency battery available for a minimum of 90 minutes with both integral or remote test switch in 800 or 1700 delivered lumens.

TRIM OPTIONS

- All trims are self flanged die cast or anodized.
- Trim includes standard frosted acrylic diffuser.
- 12% lumens increase if remove standard frosted acrylic diffuser in field.
- Optical Enhancer reflects light evenly across the diffusion lens.
- Trims available in round or square in an assortment of standard or made to order finishes.

LABELS/COMPLIANCE/WARRANTY

- CSA Listed for US and Canada
- Dry/Damp/Wet location rated.
- 5 Year limited warranty



ORDERING INFORMATION

| Series | Aperture Size | Lumens | Color Temperature | Voltage | Dimming | Optical Lens ³ | Filter |
|--------------|---------------|---------------|-------------------|-------------------------|---|----------------------------------|---|
| RPA | 4 - 4" | 9L - 975 lm | WD - Warm Dim | UNV - 120-277 | ID ¹ Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive) | 18 - 18° | None - Leave blank |
| PRIME Series | | 11L - 1100 lm | | 120 - 20V 347 - 347V | PEQ0 Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming LDE1 Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming LTE ² Lutron Hi-Lume 1% 2-wire L3DA Hi-lume 1% EcoSystem/3-Wire L3D Driver EEI ^{3,4} eldoLED Eco 1% Dim (0-10V) EDIO ^{3,4} eldoLED Solo 0.1% Dim (0-10V) EDID ^{3,4} eldoLED Solo 0.1% Dim (DALI) | 30 - 30° 50 - 50° 80 - 80° | F - Frosted filter H - Honey comb S - Solite filter |

| Housing Type | Aperture | Frame Accessories | Collar | Options |
|---|-------------------------------|--|---|--|
| NC - Non-IC New Construction IC - Air-tight New Construction | RFD - Round Flanged Downlight | C - C-Channel bar hanger B - Flat bar hanger AH - Wood Joist | Blank - 1.5" Depth 20 - 2" Depth 30 - 3" Depth MTO - Made to order | EI8 - Emergency battery with integral switch(800 Lumens) ER8 - Emergency battery with remote switch (800 Lumens) EI17 - Emergency battery with integral switch(1700 Lumens) ER17 - Emergency battery with remote switch (1700 Lumens) FCJS-E - Vive wireless individual controller(Ecosystem) FCJS-0 - Vive wireless individual controller(0-10) CP - Chicago Plenum |

TRIM ORDERING INFORMATION



| Aperture Size / Shape / Trim Type / Style | Bevel / Flange Finish | Options |
|---|---|-------------------|
| 4RFO - 4" Round Flange Open | W-W - White bevel / white flange H-W - Haze bevel / white flange B-B - Black bevel / black flange H-H - Haze bevel / Haze flange S-S - Specular clear bevel / Specular clear flange S-W - Specular clear bevel / white flange WE-WE - Wheat bevel / wheat flange MTO - Made to order | WL - Wet Location |

1. Intelligent Drive is the standard driver.
2. 120V only.
3. Must specify logarithmic or linear eldoLED driver.
4. Confirm dimming curve: linear or logarithmic.


LUMEN CHART

| Wattage | Delivered Lumens | Voltage | CRI |
|---------|------------------|------------|-----|
| 10W | 975 lm | 120 - 277V | 90+ |
| 12W | 1100 lm | 120 - 277V | 90+ |


TRIM DIMENSION

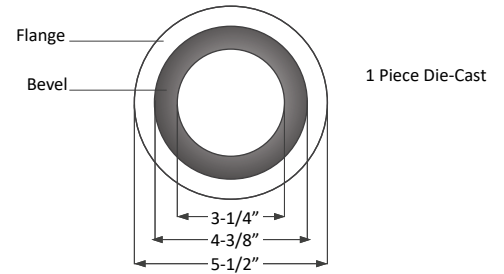



LED HOLDER & FILTER DIMENSION



Filter



LED Holder





Light Enhancer



HOUSING DIMENSION




NC - Non-IC New Construction

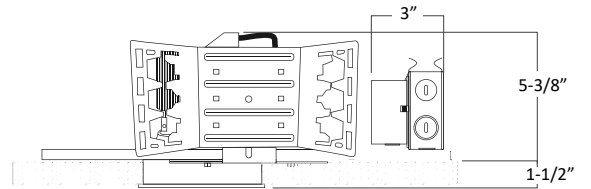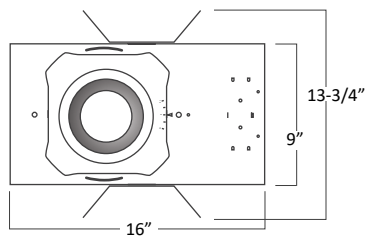

IC - Air-tight New Construction

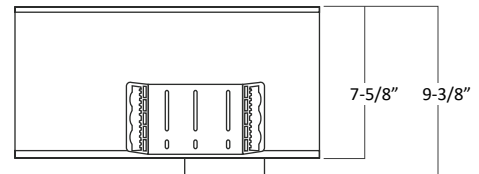

COLLAR DEPTH PER CEILING THICKNESS

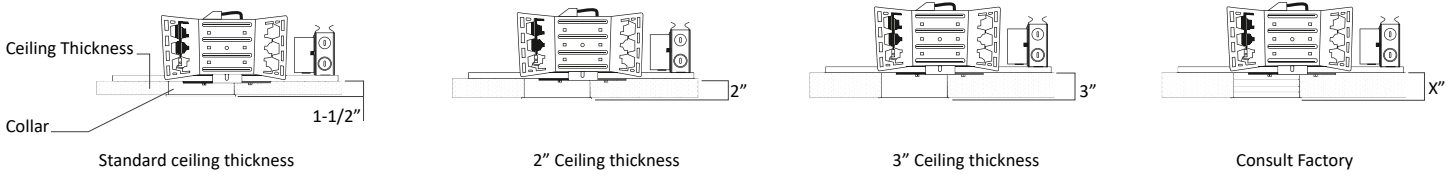

FRAME ACCESSORIES

| | |
|--|--|
| <p>B Flat Bar Hanger</p> | <p>27"</p> <p>1/2"</p> |
| <p>C C Channel Bar Hanger</p> | <p>25-3/16"</p> <p>1-6/16"</p> |
| <p>AH Adjustable Bar Hanger</p> | <p>14 1/4" - 25 1/2"</p> <p>0° - 90° Tilt</p> <p>1/2"</p> <p>0 - 90° Tilt</p> <p>Locked at 90°</p> |