



LUMEN CHART

Wattage	Delivered Lumens	Voltage	CRI
11W	1060 lm	120 - 277V	93+
16W	1320 lm	120 - 277V	93+
20W	1650 lm	120 - 277V	93+
30W	2185 lm	120 - 277V	93+
31W	2550 lm	120 - 277V	93+


*Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.

**Lumens will vary based on CCT, optical lens, and bevel finish.


TRIM HEIGHT

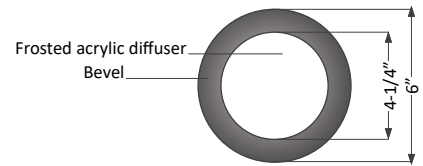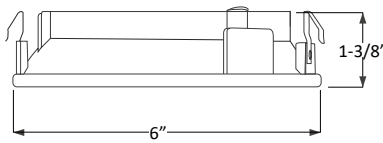



LED HOLDER & FILTER DIMENSION



Filter





LED Holder




Light Enhancer

MOUNTING INFO

CABLE HUNG DIMENSION

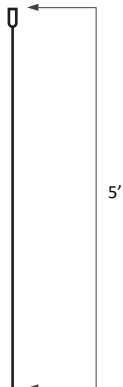


Cable Hung Canopy




3/64" Galvanized Cable Fuse Cut with Die Cast #1 Stop
Available in 24", 36", 50", 72", 100", 120", & 150" Lengths
7x7 Cable - MAX LOAD 270 lbs

STEM MOUNT DIMENSION

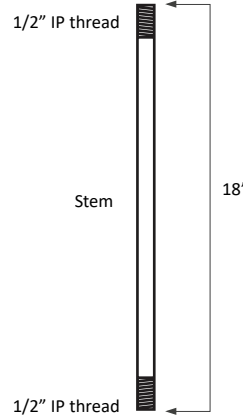

Stem



Cable Hung Canopy