


# ELEVATE MULTIPLES

## ARCHITECTURAL CABLE SUSPENDED

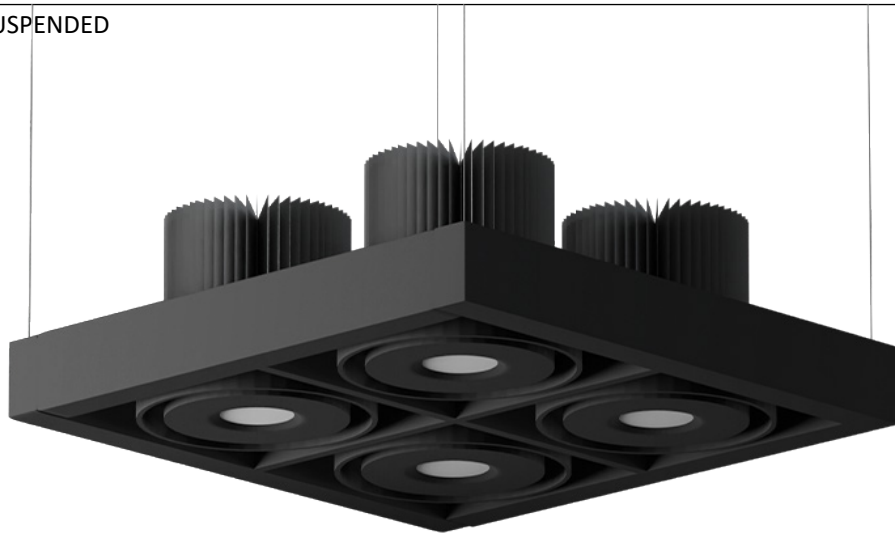

### LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. Light engine provides a quick disconnect with locking strain relief to housing.

### FRAME CONSTRUCTION

Constructed from heavy duty aluminum with powder coat finish.  
Extruded Frame Dimensions: 1.50" x 1.50" x .125"

### ADJUSTMENT

Double gimbal adjustment with locking mechanism. 35° X 35° HH.

### OPTICS

Field replaceable TIR optics available in 12°, 22°, 27°, 35°, and 45°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

### DIMMING

Available in 8 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LTE) Lutron Hi-Lume 1% 2-wire, 120V. (L3DA) Hi-Lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V. All drivers are field replaceable.

### THERMAL MANAGEMENT

Ambient temperatures at fixture location should not exceed -20° to 40°C.

### MOUNTING

Suspended ceiling mount with aircraft cable.

### LABELS/COMPLIANCE/WARRANTY

- CSA Listed for US and Canada  
- 5 Year limited warranty



## ORDERING INFORMATION

RPM — Housing Size — Profile — Mounting types — Module Configuration — Lumens Per Head — Color Temperature — Voltage — Dimming — Optical Lens — Filter — Trim Type — Frame Finish

Series	Housing Size	Profile	Mounting Types	Module Configuration	Lumens Per Head	Color Temperature	Voltage
RPM	M - medium	150 - 1.50"	CS <sup>1</sup> - Cable suspended	4SR - Four module, Square config. w/ remote driver	8L - 890 lm 11L - 1175 lm 16L - 1650 lm	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	UNV - 120-277V 120 - 120V
ELEVATE MULTIPLES Series							











Dimming	Optical Lens	Filter	Trim Type	Frame Finish	Note
ID <sup>2</sup> Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive)	12 - 12° 22 - 22°	None - Leave blank F - Frosted filter	B - Bevel R - Regress	B - Black MTO - Made to Order	1. 5ft standard cable length. 2. Intelligent Drive is the standard driver. 3. 120V only. 4. Must specify logarithmic or linear eldoLED driver. 5. Confirm dimming curve: linear or logarithmic.
PEQ0 Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming	27 - 27° 35 - 35°	H - Honey comb S - Solite filter	S - Snoot		
LDE1 Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming	45 - 45°				
LTE <sup>3</sup> Lutron Hi-Lume 1% 2-wire					
L3DA Hi-lume 1% EcoSystem/3-Wire L3D Driver					
EEI <sup>4,5</sup> eldoLED Eco 1% Dim (0-10V)					
EDIO <sup>4,5</sup> eldoLED Solo 0.1% Dim (0-10V)					
EDID <sup>4,5</sup> eldoLED Solo 0.1% Dim (DALI)					

## LUMEN CHART

Wattage	Delivered Lumens	Voltage	CRI
10W	890 lm	120 - 277V	93+
14W	1175 lm	120 - 277V	93+
20W	1650 lm	120 - 277V	93+

\*Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.  
 \*\*Lumens will vary based on CCT, optical lens, and bevel finish.

## DIMENSION

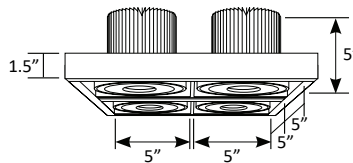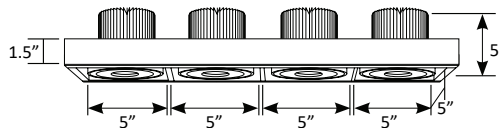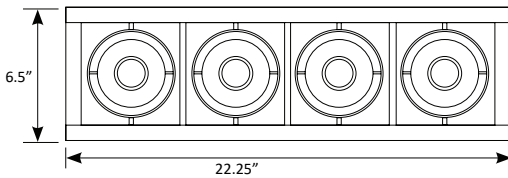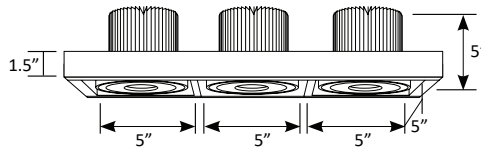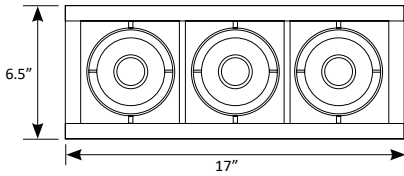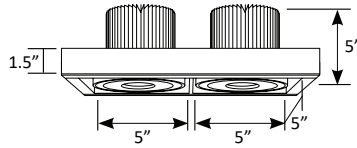


## OPTICAL




12°, 22°, 27°, 35°, 45°

## FILTERS

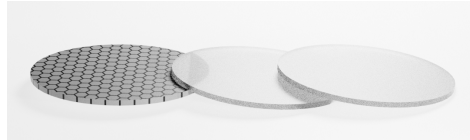

H - Honey comb    F - Frosted filter    S - Solite filter

## TRIM TYPE

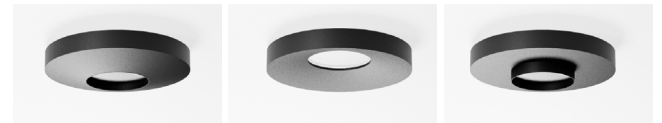

B - Bevel    R - Regress    S - Snoot