LIGHTWAY 6 / SYMMETRICAL BAFFLES

RECESSED WITH TRIM

The Lightway 6 Symmetrical Baffles is designed as a modern replacement for the traditional baffled fluorescent linear fixtures.
The baffles offer excellent glare control and are compatible with a wide array of beam angles.
The specially-designed aluminum optics with high-power LEDs generate a powerful overall lighting effect.

- Diverse options of beam angles: very narrow, narrow, medium, wide and elliptical
- Excellent glare control and visual cutoff. Transversal & longitudinal shielding angle (45°)
- Delivers High levels of light
- Endless baffle tray colors and finish options for a decorative look

reddot award 2017
winner

IP20

Luminaire

Application:	Ambient
Body Material:	Extruded aluminium
Cutout:	Cutout: length - 20mm / width 74mm / depth 121.5mm

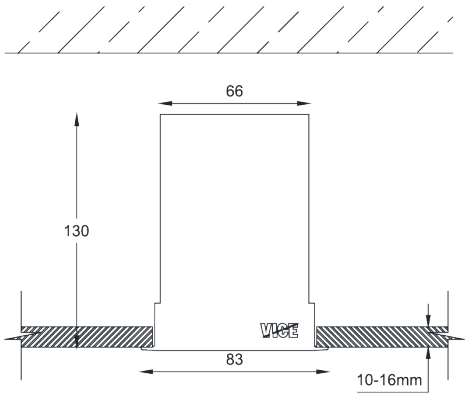

Optics

Optic Type:	UV stabilized TIR Lens
Glare Control Device:	Aluminium Anti-Glare Baffles
Surface Diffuser:	No Diffuser

Electrical equipment

Mains Voltage:	220-240 VAC 50/60 Hz
Control Gear Efficacy:	> 85%

Polar Curve



Medium Beam, 30° /
LOR: 85.6%



Wide Beam, 45° /
LOR: 76.8%



Medium Beam, 30° /
LOR: 72.5%

We reserve the right to make technical changes without prior notice

projects@vicelighting.com - **www.vicelighting.com**
Lebanon 11-0125-Beirut +961 1 486311 - **France** 75012 Paris +33 06 75 32 73 23

LIGHTWAY 6 / SYMMETRICAL BAFFLES
RECESSED WITH TRIM



Wide Beam, 45° /
LOR: 70.15%



Narrow Beam, 15°
/ LOR: 75%



Elliptical beam 15° x 36° /
LOR: 88%



Narrow Beam, 15°
/ LOR: 81.29%



Elliptical beam 15° x 36° /
LOR: 78.15%

We reserve the right to make technical changes without prior notice

projects@vicelighting.com - **www.vicelighting.com**
Lebanon 11-0125-Beirut +961 1 486311 - **France** 75012 Paris +33 06 75 32 73 23

LIGHTWAY 6 / SYMMETRICAL BAFFLES
RECESSED WITH TRIM

Code Index:

L 6	I	R W	_ _	_ _	_ _ _ _ _	_	2 0	_ _	N	I	_ _ _	_
Family	Environment	Mounting	Optic	Beam Angle	CRI/CCT & Power	Control	IP	Body Finish	Emergency	Layout	Length	Wiring
			AB	15	8TW	C		BS			30	I
			AG	30	9TW	D		BT			60	B
			AW	45	927N2	E		WS			90	M
				E2	927N4			WT			120	E
					927N5			GS			150	
					930N2						180	
					930N4						210	
					930N5						240	
					940N2						270	
					940N4						300	
					940N5							

Family
L6 Lightway 6

Environment
I Indoor

Mounting
RW Recesssed With Trim

Optic
AB Black Symmetrical Baffles
AG Gray Symmetrical Baffles
AW White Symmetrical Baffles

Beam Angle
15 Narrow Beam, 15°
30 Medium Beam, 30°
45 Wide Beam, 45°
E2 Elliptical beam 15° x 36°

CRI/CCT & Power

		LED Load	initial Lumen
2700°K	**927N2:**	19 W/m	2480 lm/m
	927N4:	28 W/m	3410 lm/m
	927N5:	35 W/m	4220 lm/m
3000°K	**930N2:**	19 W/m	2650 lm/m
	930N4:	28 W/m	3640 lm/m
	930N5:	35 W/m	4500 lm/m
4000°K	**940N2:**	19 W/m	2820 lm/m
	940N4:	28 W/m	3870 lm/m
	940N5:	35 W/m	4790 lm/m
Tunable White	**9TWP1:**	20 W/m	2560 lm/m
	9TWP2:	30 W/m	3650 lm/m
	9TWP3:	42 W/m	4730 lm/m

Control
C Non-dimmable
D DALI Dimmable
D DALI Type 8
E 1-10V Dimmable

IP
20 IP20

Body Finish
BS Black Smooth
BT Black Textured
WS White Smooth
WT White Textured
GS Gray Smooth

Emergency
N No Emergency

Layout
I I Shape

Length
30 30 cm
60 60 cm
90 90 cm
120 120 cm
150 150 cm
180 180 cm
210 210 cm
240 240 cm
270 270 cm
300 300 cm

Wiring
I Individual
B Beginning
M Middle
E End

We reserve the right to make technical changes without prior notice

projects@vicelighting.com - **www.vicelighting.com**
Lebanon 11-0125-Beirut +961 1 486311 - **France** 75012 Paris +33 06 75 32 73 23