


TPR MIRAGE FLEX™RGB PANEL

IP20/54

Description:

The TPR Mirage Flex™ **RGB** panel is extremely flexible, low profile and easy to install. It's field cuttable which makes it ideal for curved surfaces and applications where field modification is necessary. MirageFlex™ will provide even illumination with less than one inch of space between the light panel

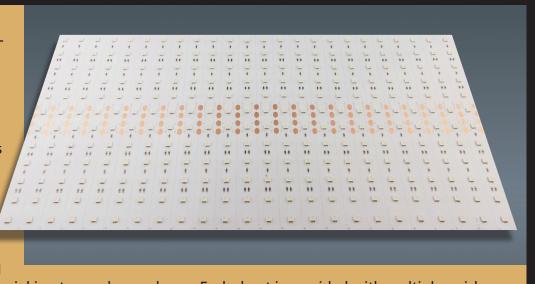

and the translucent material ie: stone, glass, polymer. Each sheet is provided with multiple quick connect points. This enables quick connection and feed through for multiple panels. Our IP54 model has you covered for wet location applications.

Specifications:

Voltage: 24V DC (CV)

Power Consumption: 25 watts per panel (@ full RGB) **Dimensions:** 480mm x 240mm (18.90" x 9.45")

Can be cut in strips every 12mm x 240mm **Segmentation:**

(on the cutting lines) for custom sizing

Control:

Colors in Nanometers: RED: 620-630nm

GREEN: 520-525nm BLUE: 460-470nm RED: 230 lumens

Lumens (by color): GREEN: 600 lumens **BLUE: 155 lumens**

DMX

Certifications:





Ordering Logic:

MODEL	WATTS (per panel)	RATING
TPR-MFLP-RGB	– 25W –	IP20 IP54