


TPR MIRAGE FLEX™ RGBW PANEL

IP20/54

Description:

The **TPR Mirage Flex™ RGBW** panel is extremely flexible, low profile and easy to install. It's field cuttable which makes it ideal for curved surfaces and applications where field modification is necessary. MirageFlex™ will provide even illumination with less than one inch of space between the light panel and the translucent material ie: stone, glass, polymer. Each sheet is provided with multiple quick connect points. This enables quick connection and feed through for multiple panels. Our IP54 model has you covered for wet location applications.

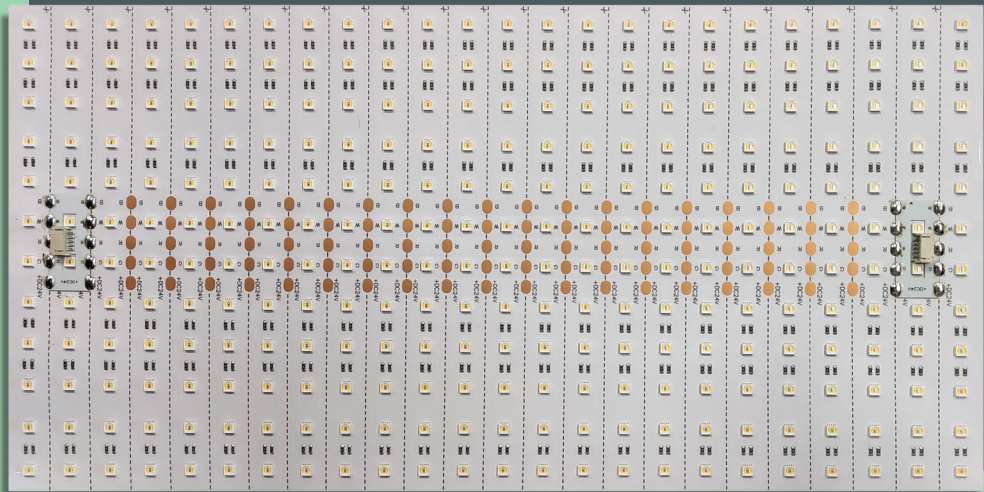

Specifications:

Voltage: 24V DC (CV)
Power Consumption: 25 watts per panel (@ full RGBW)
Dimensions: 480mm x 240mm (18.90" x 9.45")
Segmentation: Can be cut in strips every 20mm x 240mm (on the cutting lines) for custom sizing
Control: DMX

Non-White Colors in Nanometers:

RED: 620-630nm
GREEN: 520-525nm
BLUE: 460-470nm

Lumens (by color):

RED: 120 lumens
GREEN: 360 lumens
BLUE: 90 lumens
2700K: 850 lumens
4000K: 900 lumens
6000K: 900 lumens

Certifications:



Ordering Logic:

MODEL	WATTS (per panel)	COLOR TEMP	RATING
TPR-MFLP-RGBW	25W	2700K 4000K 6000K	IP20 IP54