
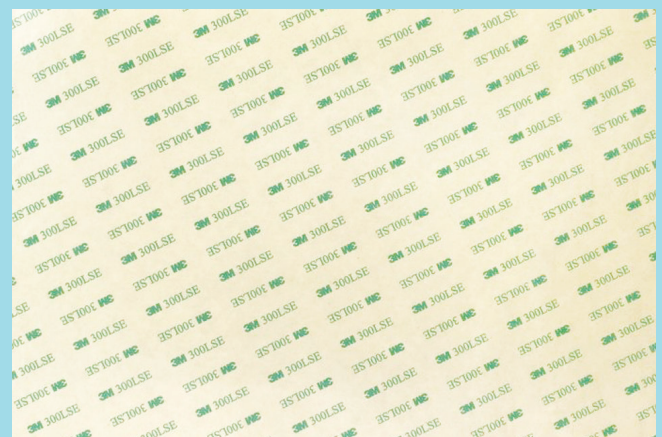


# TPR MIRAGEFLEX™ – SINGLE COLOR WHITE

IP20/54

## Description:

The **TPR Mirage Flex™** is extremely flexible, low profile and easy to install. It's field cuttable which makes it ideal for curved surfaces and applications where field modification is necessary. MirageFlex™ will provide even illumination with less than one inch of space between the light panel and the translucent material ie: stone, glass, polymer. Each sheet is provided with multiple quick connect points. This enables quick connection and feed through for multiple panels. There are multiple wattage and lumen packages available for even greater flexibility. Of course we have the most popular color temperatures available and CRI90 is standard. Our IP54 model has you covered for wet location applications.

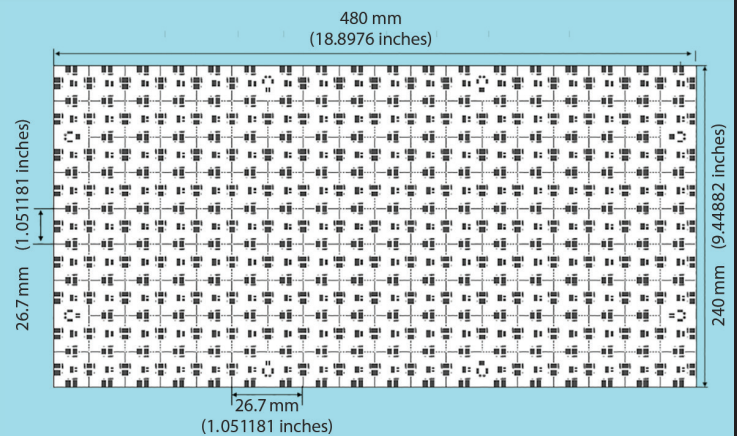

## Specifications:

- Operating Voltage:** 24V DC (CV)
- Dimensions:** 9.45" x 18.9" (one size)  
(240mm x 480mm) flex panel
- Operating Temperature:** -22 °F ~ +104 °F
- Each panel is supplied with a jumper in 1" and 6" and a power feed in 4 ft.
- Color Temperatures:** 2700K, 3000K, 4000K, and 6500K
- Wattage Options:** 2, 3.7, 7.5 and 10 per panel
- Wattage (per LED):** 0.012W, 0.025W, 0.046W, 0.061W
- Cutting Increments every:** 1.05"(26.7mm)L x 1.05"(26.7mm)W
- Panel is .046" (1.35mm) thick without connector, .21" (6.25mm) with connector
- Color Rendering:** CRI 90+

## Certifications:



## Ordering Logic:

MODEL	COLOR	WATTAGE (per panel)	IP RATING
TPR-MFLP	2700K 3000K 4000K 6500K	*2 WATT (182 lumens @ 3000K) *3.7 WATT (336 lumens @ 3000K) *7.5 WATT (682 lumens @ 3000K) *10 WATT (910 lumens @ 3000K)	IP20 IP54