

CATALOG NO PROJECT NAME

COMMENTS:

JOB INFORMAT PREPARED BY:

#### FEATURES

USE OF PRODUCT

The Versa Commercial Double Sidekick Wall Wash Series is the ideal product for energy efficient lighting in Non-IC Remodel applications where double wall washing is required, such as corridors & hallways.

#### VERSA COMMERCIAL FEATURES

30° Double Sidekick Wall Wash

Wattage	Lumens	Voltage	CRI	
11W	1020 lm	120-277V	93+	
16W	1380 lm	120-277V	93+	
20W	1590 lm	120-277V	93+	
21W	1895 lm	120-277V	93+	
30W	2090 lm	120-277V 93+		
31W	2440 lm	120-277V 93+		
38W	2940 lm	n 120-277V 93+		
45W	3260 lm	120-277V	93+	
57W	3840 lm	120-277V	93+	

50° Double Sidekick Wall Wash

Wattage Lumens Voltage CRI					
wallage	Lumens	voitage	CN		
11W	965 lm	120-277V 93+			
16W	1225 lm	120-277V 93+			
20W	1490 lm	120-277V	93+		
21W	1765 lm	120-277V	93+		
30W	1945 lm	120-277V	93+		
31W	2345 lm	120-277V 93-			
38W	2765 lm	120-277V 93+			
45W	3100 lm	120-277V	93+		
57W	3825 lm	120-277V	93+		

### ORDERING INFORMATION

Color Temperature: 2700K, 3000K, 3500K, or 4000K SDCM: 2 step binning Color Rendering Index: 93+ CRI R9: 60+ LED Life: 50.000 hours LED Type: Cree LED Warranty: 5 year limited warranty

#### SIDEKICK TECHNOLOGY

Versa Commercial Double Sidekick Wall Wash utilizes angle bending diffuser technology that evenly redirects and distributes light for precision wall washing.

#### LED ENGINE

VERSA COMMERCIAL

6" LED COMMERCIAL DOUBLE SIDEKICK WALL WASH REMODEL

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED engine is available in a multitude of optical lens allowing for easy optical control. LED mounted to aluminum heat sink for maximum life output and thermal management.

#### OPTICAL LENS (Field Replaceable) Available in 30° and 50° beam angle.

#### DIMMING

Available in 8 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LTE) Hi-Lume 1% 2-wire, 120V (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

#### EMERGENCY BACKUP

Optional emergency battery available for a minimum of 90 minutes with both integral or remote test switch in 800 or 1700 delivered lumens.

#### VERSATILITY

The Versa Commercial Sidekick series provides for interchangeable wall wash trims in 30° or 50° double wall wash lens also with an assortment of finishes to achieve a particular look. The ability to field install and/or replace various trims makes the Versa Commercial Sidekick Series the most flexible commercial wallwash downlight in the industry.

INSTALLATION

Non-IC housing. Installation must be kept at least 3" away from fixture.

LABELS/COMPLIANCE -CSA Listed for US and Canada



			1		
Series	Lumens	Color Temp	Voltage	Dimming	
<b>RVC6DW-30</b> - 6" Versa Commercial 30º Double Wall Wash	10L - 1020 im 13L - 1380 im 15L - 1590 im 18L - 1895 im 20L - 2090 im 24L - 2440 im 29L - 2940 im 32L - 3260 im 38L - 3840 im	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K	UNV - 120-277V 1 - 120V 3 <sup>1</sup> - 347V	<ul> <li>ID<sup>2</sup>- Standard all-inclusive ELV, Triac, and 0-10V dimming driver (Intelligent Drive</li> <li>PEQ0<sup>3</sup>- Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming</li> <li>LDE1<sup>5</sup>- Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming</li> <li>LTE<sup>45</sup>- Hi-Lume 1% 2-wire</li> <li>L3DA - Hi-lume 1% EcoSystem/3-Wire L3D Driver</li> <li>EEI<sup>56</sup>- eldoLED Eco 1% Dim (0-10V)</li> <li>DID<sup>56</sup>- eldoLED Solo 0.1% Dim (0-1L)</li> </ul>	
<b>RVC6DW-50</b> - 6″ Versa Commercial 50° Double Wall Wash	9L - 965 lm 12L - 1225 lm 14L - 1490 lm 17L - 1765 lm 19L - 1765 lm 23L - 2345 lm 27L - 2765 lm 31L - 3100 lm 38L - 3825 lm				
-	-			1. Step down transformer required. 2. Intelligent Drive is the standard driver for	
Double Wall Wash Trim	Frame	Options	;	the Versa Commercial. 3. Driver must not exceed 20W	
TWD - White Double Wall Wash TSD - Specular Clear Double Wall Wash THD - Haze Double Wall Wash TBD - Black Double Wall Wash TD - Made to Order	FR - Remodel	ER8 - Emergency Battery with Remote Switch (800 Lumens) ER17 - Emergency Battery with Remote Switch (1700 Lumens) WL - Wet Location		<ol> <li>A. 120V only.</li> <li>Inapplicable to 4000 Lumen offering.</li> <li>Must specify logarithmic or linear eldoLED diver.</li> </ol>	



Tel: 323.446.2626 Fax: 323.446.2606



PROJECT:




MODEL #:


LOCATION:

CONTACT:


## DIMENSIONS








# WALL WASH DIMENSIONS

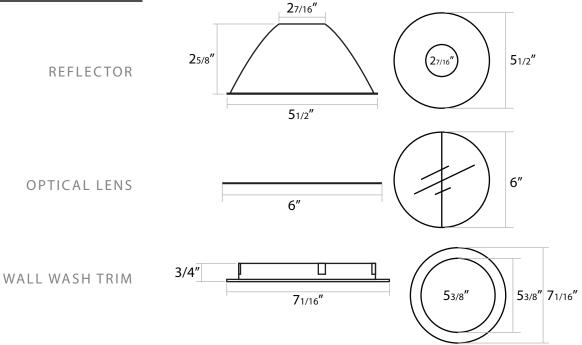

# LED HEIGHT INSIDE DOWNLIGHT





www.rayonlighting.com info@rayonlighting.com Tel: 323.446.2626 Fax: 323.446.2606 Specification and product availability subject to change without notice




PROJECT:



6" LED COMMERCIAL DOUBLE SIDEKICK WALL WASH REMODEL LOCATION:

MODEL #:

CONTACT:

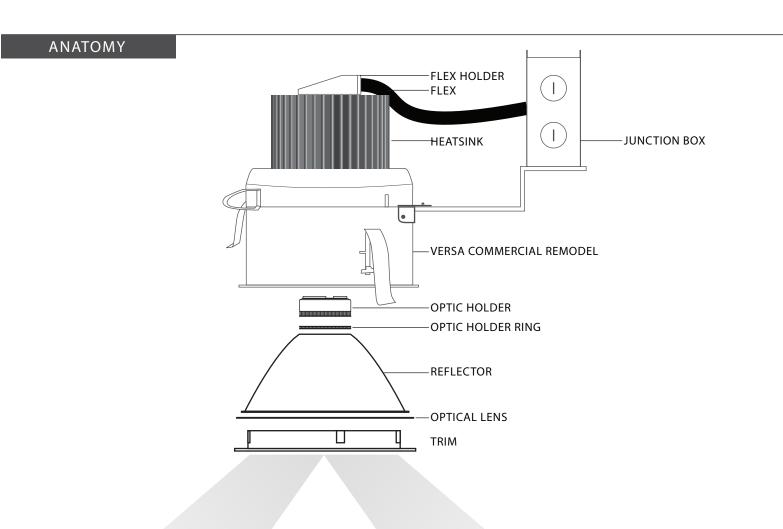



Tel: 323.446.2626 Fax: 323.446.2606