



T1017LED-PA

SONOMA III

T1017LED-PA

JOB INFORMATION

Type: _____
 Catalog No: _____
 Project Name: _____
 Comments: _____
 Prepared by: _____

FEATURES

USE OF PRODUCT

The intended use of this product is in showroom, restaurant, lobby, retail, or any interior commercial space.

HOUSING

Rugged die cast aluminum housing and extrusion aluminum.

FINISH

Matt-finished, architectural powdercoat over a precise chromate conversion coating. Consult factory for made to order architectural finishes.

OPTICS

- Available in Prismatic Acrylic.
- Diffused or clear glass lens available upon request.

LED

High output LEDs offer a minimum estimated operating life of 50,000 hours in 3000K, 3500K, 4000K, or 5000K (standard) with CRI>83. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.

DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50 to 60 Hz. Driver provides dual dimming: Triac (forward-phase or leading-edge)/ELV (reverse-phase or trailing-edge) and 0-10V Dimming Constant Current. Driver protections includes: Output open load, over-current and short-circuit, and over-temperature with auto recovery. Step down transformer may be utilized for 480V or 347V applications.

MOUNTING

Available in pendant hung, single cable, or double cable.

LISTINGS/COMPLIANCE

- CSA

ACCESSORIES

Consult Factory.



ORDERING INFO

SERIES	WATT/LUMENS	VOLTAGE	COLOR TEMPERATURE	HOUSING FINISH	REFLECTOR	REFLECTOR FINISH	MOUNTING
T1017LED	12 - 12W/1034lm	UNV - 120V-277V	27K - 2700K	GY ³ - Gray	PA - Prismatic Acrylic	ST - Standard	SC ⁶ - Single Cable
	20 - 20W/2001lm	347 ¹ - 347	30K - 3000K	MTO ⁴ - Made to order		MTO - Made to order	DC - Double Cable
	30 - 30W/2852lm	480 ¹ - 480V	35K - 3500K				SM ⁵ - Stem Mount
	45 - 45W/4158lm		40K - 4000K				
	57 - 57W/5070lm		50K ² - 5000K				

LENS OPTIONS

- PDL⁷ - Partially diffused outer diameter lens
- FDL - Fully diffused lens
- NL - No lens

OPTIONS

- MS - Motion sensor
- SDT - Step down transformer
- EM - Emergency battery

Notes

1. Step down transformer required
2. Standard color temperature
3. Standard finish
4. RAL number required
5. 18" standard length, consult factory for other
6. Standard cable length 5ft
7. Standard lens



T1017LED-PA

SONOMA III

DIMENSIONS



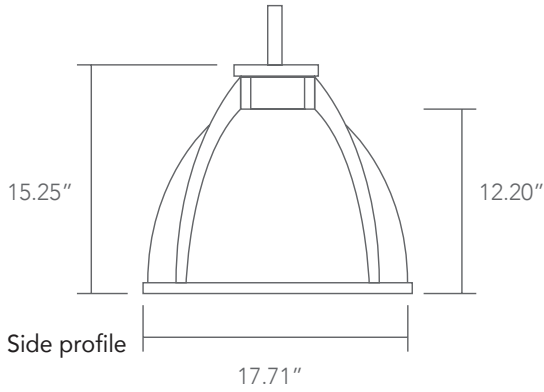



ILLUSTRATION OF ASSEMBLY

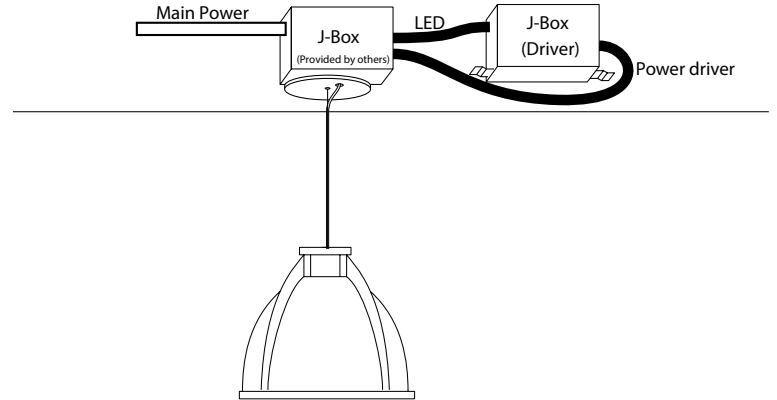


CABLE HUNG DIMENSION




Cable hung canopy



3/64" Galvanized Cable Fuse Cut with Die Cast #1 Stop
Available in 24", 36", 50", 72", 100", 120", & 150" Lengths
7x7 Cable - MAX LOAD 270 lbs



STEM MOUNT DIMENSION



Stem mount canopy

