




# T761LEDT

LED GARAGE VAPOR-  
PROOF-STRAIGHT SHADE

JOB INFORMATION	TYPE:
	CATALOG NO.
	PROJECT NAME:
	COMMENTS:
PREPARED BY:	

T761LEDT

## DIMENSIONS

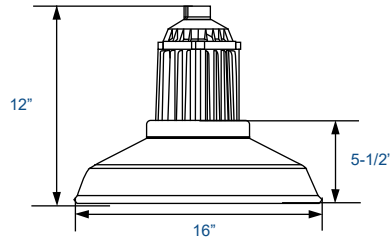

## FEATURES

### Use of Product

These luminaires are recommended for use in areas where artificial lighting is needed adjacent to ecologically sensitive areas, sea turtle nesting beaches, migratory corridors, and Dark Sky Friendly communities. Ceiling mounted fixtures if located on the shore perpendicular or beach side of the structure shall be on the ground floor only and equipped with beachside shielding.

### Housing

Heavy Duty Die Cast Aluminum Housing with Integral Heat Sinking, 3/4" NPS Threaded Mounts. Includes Shade Required to Maintain FWC Certification.

### Finish

Smooth Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

### Optics

Flat Clear Tempered Glass Lens.

### Amber LED

LED operate between 585 and 595 nm.

### Driver

Electronic Driver, 120-277V, 50/60Hz; Less than 20%

THD and PF>0.90. Standard internal surge protection 6kV. 0-10V Dimming standard for a dimming range of 100% to 10%; Dimming source current is 150 microamps.

### Mounting

Pendant Mount or Surface Mount on Ceiling.

### Warranty

5-Year warranty for -40°C to +40°C environment.


### Listings/compliance

- CSA - Listed for wet location.
- ANSI/UL 1598
- 8750 IP65 sealed LED compartment

### Photometric Performance

Drive Current		Optics
Watts	(mA)	
27W	116	Type V

### Amber LED Spectral Chart

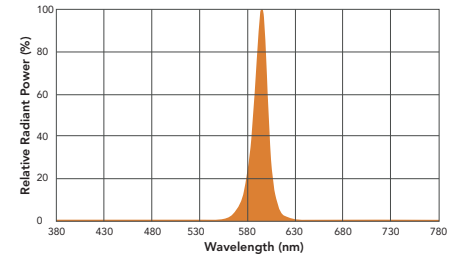

## ORDERING INFO

T761LEDT					
Series	Watt	Voltage	Color Temperature	Finish	Options
T-SERIES LED	23 - 23W	UNI12-120V-277V	A - Amber	P <sup>1</sup> - Platinum MTO <sup>2</sup> - Made to order	SF - Single Fuse DF - Double Fuse SS - Straight aluminum shade WG - Wire Guard RB - Reducer bushing 3/4" to 1/2" (use with swivel mount) REB12 - Round electrical box with (5) 1/2" coin plugs BP - Back plate REB34 - Round electrical box with (5) 3/4" coin plugs

### Notes:

1. Standard finish.
2. RAL number required.