



Accentra Wet Location IP66 Rated/IK10 Rated Series

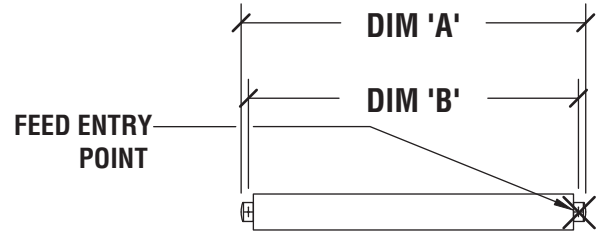





Standard Fixture Lengths and Mounting Centers

Stem Mounting - 345° Rotatable

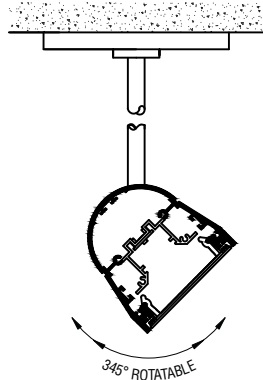



O.A. FIXTURE LENGTH	MOUNTING CENTERS
DIM 'A'	DIM 'B'
(Nom. 2' Lit) - 34"	32"
(Nom. 3' Lit) - 46"	44"
(Nom. 4' Lit) - 58"	56"
(Nom. 6' Lit) - 82"	80"
(Nom. 8' Lit) - 106"	104"

Surface-Ceiling Mounting and Surface-Wall Mounting - both 345° Rotatable

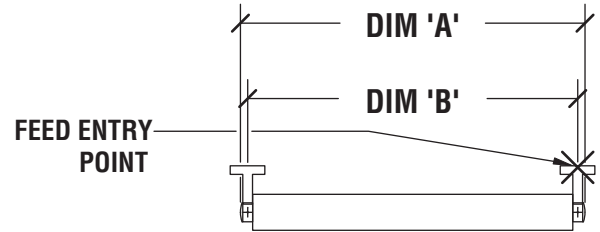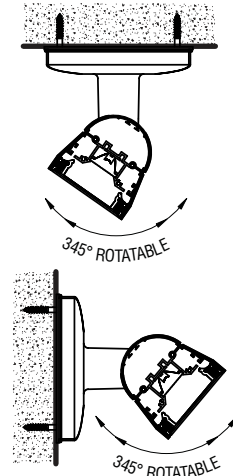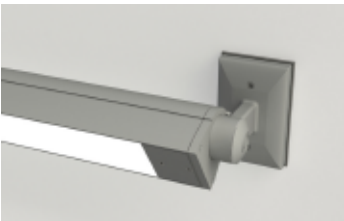

O.A. FIXTURE LENGTH	MOUNTING CENTERS
DIM 'A'	DIM 'B'
(Nom. 2' Lit) - 34"	32"
(Nom. 3' Lit) - 46"	44"
(Nom. 4' Lit) - 58"	56"
(Nom. 6' Lit) - 82"	80"
(Nom. 8' Lit) - 106"	104"

Extended Wall Mounting - 345° Rotatable

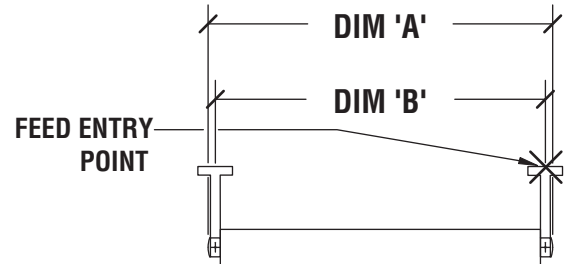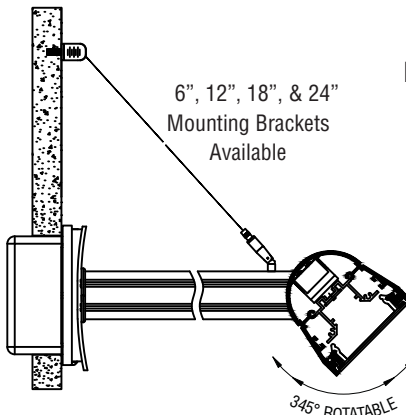

O.A. FIXTURE LENGTH	MOUNTING CENTERS
DIM 'A'	DIM 'B'
(Nom. 2' Lit) - 34"	32"
(Nom. 3' Lit) - 46"	44"
(Nom. 4' Lit) - 58"	56"
(Nom. 6' Lit) - 82"	80"
(Nom. 8' Lit) - 106"	104"

*Shown with Supplemental Cable Assembly -
Required for 12", 18", & 24" Bracket Assy's

