




# T753LEDT

## LED GARAGE LIGHT

JOB INFORMATION	TYPE:
	CATALOG NO.
	PROJECT NAME:
	COMMENTS:
PREPARED BY:	

T753LEDT

### DIMENSIONS

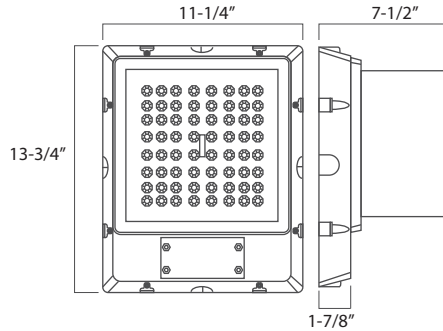

### FEATURES

#### Use of Product

These luminaires are recommended for use in areas where artificial lighting is needed adjacent to ecologically sensitive areas, sea turtle nesting beaches, migratory corridors, and Dark Sky Friendly communities. Ceiling mounted fixtures if located on the shore perpendicular or beach side of the structure shall be on the ground floor only and equipped with beachside shielding.

#### Housing

Low profile die cast aluminum housing, 1/2" coin plugs with O-rings for conduit or external sensor. Built-in sensor housing with color-matched polycarbonate cover. A clear cover will be provided when a sensor is ordered includes full baffle required to maintain Florida Fish & Wildlife Conservation Commission certification.

#### Finish

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

#### Optics

Molded UV-resistant acrylic optical lens designed.

#### Amber LED

LED operate between 585 and 595 nm.

#### Driver

Electronic Driver, 120-277V, 50/60Hz; Less than 20% THD and PF>0.90. Standard internal surge protection 6kV. 0-10V Dimming standard for a dimming range of 100% to 10%; Dimming source current is 150 microamps.

#### Mounting

Included Easy-hang bracket fits standard 4" electrical box.

#### Controls

Fixtures ordered with factory-installed photocell or motion sensor controls are internally wired for switching and/or 1-10V Dimming within the housing. Remote direct wired interface of 1-10V Dimming is not implied and may not be available, Please consult factory. Fixtures are tested with LEPA controls and may not function properly with controls supplied by others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

#### Warranty

5-Year warranty for -40°C to +40°C environment.


#### Listings/compliance

- CSA - Listed for wet location.
- ANSI/UL 1598
- 8750 IP65 sealed LED compartment

#### Photometric Performance

Watts	Drive Current		Optics	Lumens	LPW
	(mA)				
39W	117		Type V	1,877	43
52W	117		Type V	2,292	40

#### Amber LED Spectral Chart

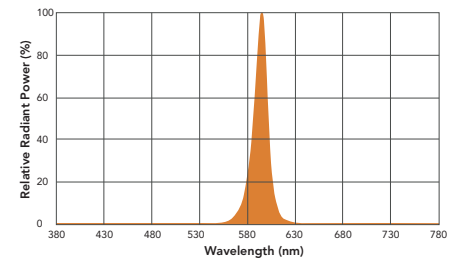

### ORDERING INFO

T753LEDT						
Series	Watt	Voltage	Color Temperature	Light Shield	Finish	Options
T-SERIES LED	39 - 39W 52 - 52W	UNV-120V-277V	A - Amber	LS - Light shield	BZ <sup>1</sup> - Bronze MTO <sup>2</sup> - Made to order MGTO <sup>2</sup> - Marine grade made to order	SF - Single Fuse DF - Double Fuse SP - Surge protection PC1 - Photocell, 120V PC2 - Photocell, 250-305V S2 - Microwave sensor with dimming for mounting height of 8 to 40' QM - Quick mount/pendant mount EM - Emergency battery

#### Notes:

1. Standard finish.
2. RAL number required.

