

# TPR WESTFLEX® OPTIPRO™ 24V TAPELIGHT

IP67

## Description:

The **Westflex® OptiPro™ Tape Light** is a flexible 24 volt DC product for architectural and entertainment applications. The Westflex® OptiPro is IP67 rated for outdoor applications. The product is cuttable every six LED's (4.9213") and has an incredible maximum run length of 32' with a feed from one end.



This flexible product gives you the optic control and performance of a much larger rigid fixture, with the advantages of flexibility, easy installation and cost effectiveness.

The many color temperatures, CRI and beam spreads make it the ideal choice for various projects/applications.

## Specifications:


Power:	6.1W/ft	CCT:	2700K, 3000K, 4000K Standard	Operating Temp.:	-35°C ~ 50°C
PCB Width:	0.8661" (22mm)	Dimmable:	Yes (PWM, DALI, 0/1-10V, Triac)	Beam Angle:	20°, 30°, 45°, 60°, 20 x 45°
Lumen Output:	500Lm/ft CRI 90+ (4000K)	IP Rating:	IP67	Lumen Maintenance:	50,000 Hrs
MAX. Run Length:	32'				
Cut Length:	4.9213" or 125mm (6 LEDs)				
Voltage:	24 VDC				




## Certifications:



Westflex FL-SMD MT Mounting Track

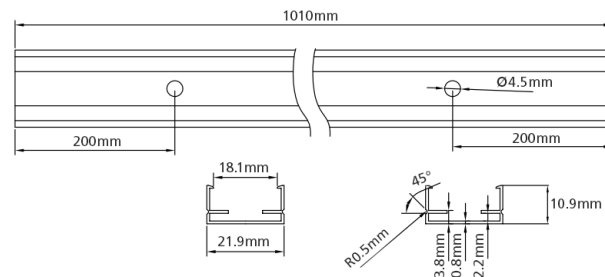

Westflex FL-SMD-WP-MC-IP Mounting Clip

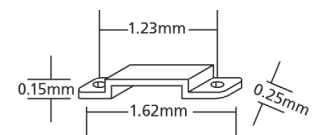

## Ordering Logic:

MODEL	BEAM ANGLE	COLOR TEMP	CRI
TPR-FL-SMD - OPTIPRO24V	20°	*1800K 4000K	*80+
	30°	*2200K *4500K	90+
	45°	*2400K *5000K	*95+
	60°	2700K *5700K	*98+*
	20x45°	3000K *6000K	
		*3500K *6500K	

\*Special order color temps and CRI must meet minimum order qty.\*