



A family of uniformly luminous fixtures, **Shine** recessed delivers outstanding performance for superior energy savings. Available in a wide variety of sizes, Shine is a highly efficient and economical solution for any energy challenged recessed lighting project.

**Shine now includes AccuRender technology for the highest color quality at the highest efficacy.**

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Cat.No: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Line ID: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Notes: \_\_\_\_\_

### Ordering guide

example: 3322D1STL93540A1DE


Family	Size <sup>4</sup>	Version	Configuration	Source	CRI/CCT <sup>1</sup>	Lumens <sup>1</sup>
<b>33</b>			<b>ST</b>	<b>L</b>		
33 Shine	24 2'x4' <sup>2</sup> 54 20'x4' <sup>4,5</sup> M4 600x1200mm <sup>9</sup>	D1 Standard T-Grid C1 Standard T-Grid+ Chicago Plenum A1 Standard T-Grid+ Air Return <sup>5</sup>	ST Standalone	L LED	950 CRI 90, 5000K 940 CRI 90, 4000K 935 CRI 90, 3500K 930 CRI 90, 3000K 927 CRI 90, 2700K	80 8000lm 75 7500lm 70 7000lm 65 6500lm 60 6000lm 55 5500lm 50 5000lm 45 4500lm 40 4000lm
	30 30"x30" <sup>9</sup> M7 750x750mm <sup>9</sup>					60 6000lm 55 5500lm 50 5000lm 45 4500lm 40 4000lm 35 3500lm 30 3000lm
	14 1'x4' <sup>5</sup> 22 2'x2' <sup>1</sup> 52 20"x2' <sup>5,9</sup> M2 600x600mm <sup>9</sup> M5 300x1200mm <sup>5,9</sup>					50 5000lm 45 4500lm 40 4000lm 35 3500lm 30 3000lm 25 2500lm
	12 1'x2' <sup>5,9</sup> M5 300x600mm <sup>5,9</sup>					30 3000lm 25 2500lm 20 2000lm 10 1000lm
	11 1'x1' <sup>5,7,9</sup> M1 300x300mm <sup>5,7,9</sup>					15 1500lm 10 1000lm
Optics	Wiring <sup>3</sup>	Voltage <sup>3</sup>	Driver <sup>3,8</sup>	Option <sup>4,5</sup>	System/Controls	
<b>A</b>						
A Acrylic Silk Lens	1 Single Circuit B Single Circuit+ Battery Pack <sup>6,7</sup>	D UNV 120-277V 3 347V <sup>9</sup>	E Advance Xitanium 0-10V (1% Dim) D Advance Xitanium DALI (5% Dim) <sup>6</sup> H Lutron EcoSystem LDE1 (<1% Dim, Fade-to-Black) <sup>6,9</sup>	N No option D Drywall trim kit P Flex whip (6") S Solid filler panel (set of 2) A Air return filler panel (set of 2)	Leave blank if none	
	1 Single Circuit B Single Circuit+ Battery Pack <sup>6,7</sup> R UL924 Sensor Bypass Relay <sup>10</sup>	D UNV 120-277V	S Advance Xitanium Sensor Ready (1% Dim) <sup>6</sup>		CS Interact Pro scalable wireless sensor with integral daylight & occupancy sensing, advanced grouping with dwell time <sup>8,11</sup> SB Interact Pro wireless sensor with occupancy, daylight, and environmental sensing capabilities	

**DLC Note:** Not all product variations listed on this page are DLC qualified. To ensure that a specific model is qualified, visit [www.designlights.org/search](http://www.designlights.org/search)

# Shine recessed

## Imperial & metric sizes

### Dimensions

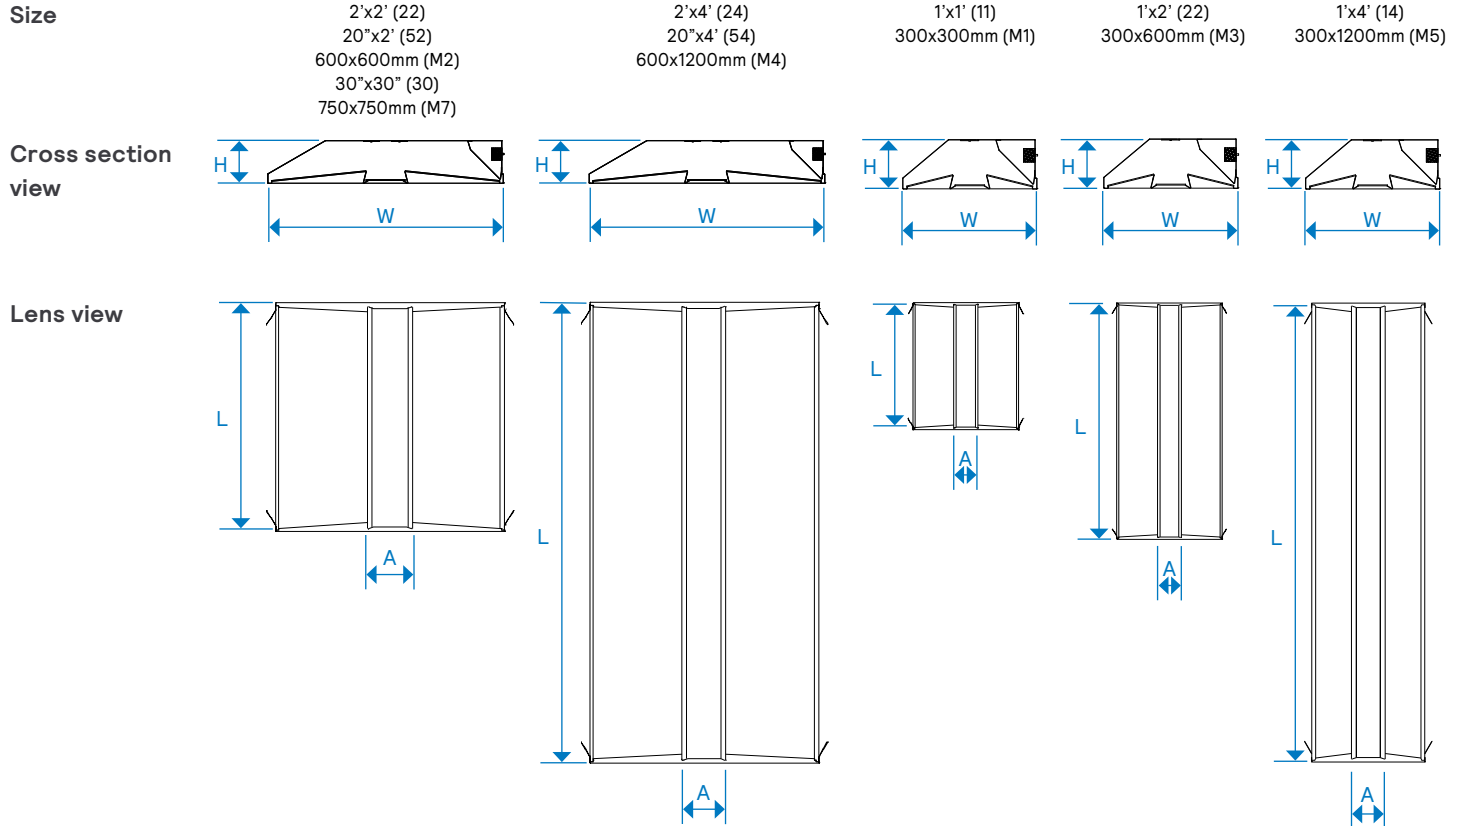

Size	W	L	H	A
2'x2' (22)	23.75" [603mm]	23.66" [602mm]	4.375" [110mm]	4.500" [114mm]
20"x2' (52)	19.78" [502mm]	23.66" [602mm]	4.375" [110mm]	4.500" [114mm]
600x600mm (M2)	23.41" [595mm]	23.31" [592mm]	4.375" [110mm]	4.500" [114mm]
30"x30" (30)	Consult Factory			
750x750mm (M7)	Consult Factory			
2'x4' (24)	23.75" [603mm]	47.38" [1210mm]	4.375" [110mm]	4.500" [114mm]
20"x4' (54)	19.78" [502mm]	47.66" [1211mm]	4.375" [110mm]	4.500" [114mm]
600x1200mm (M4)	23.41" [595mm]	46.92" [1192mm]	4.375" [110mm]	4.500" [114mm]
1'x1' (11)	11.75" [298mm]	11.75" [298mm]	4.375" [110mm]	3.500" [89mm]
300x300mm (M1)	Consult Factory			
1'x2' (22)	11.75" [298mm]	23.66" [602mm]	4.375" [110mm]	3.500" [89mm]
300x600mm (M3)	Consult Factory			
1'x4' (14)	11.75" [298mm]	47.38" [1210mm]	4.375" [110mm]	3.500" [89mm]
300x1200mm (M5)	Consult Factory			


# Shine recessed

## Imperial & metric sizes

### Mounting details


#### Flat T-Grid

Integrates with most common T-Grid types. Works with 9/16" & 15/16" flat T-Grid ceilings




#### Slot T-Grid

Can be used with slot T-Grid ceilings. For 9/16" slot T-Grid ceilings, fixture will sit 5/16" above bottom of T-Bar.




#### Ceiling Types

Integrated mounting tabs can be field-adjusted to various T-Grid ceiling heights for fastening directly to the T-Bar and/or tied off to the building structure.

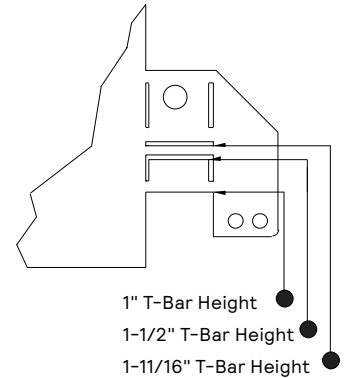


#### Air Return Vents

The air return version features slotted vents along the sides of the fixture. As a result, the installation method of the air return version may be different to the standard version, please consult the installation instruction sheet.

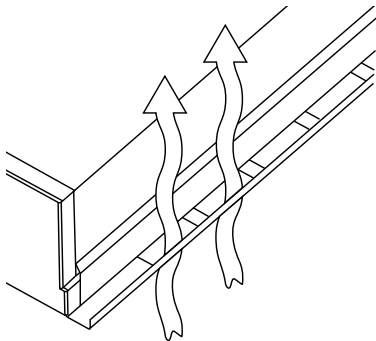

#### Filler Panel (20"x4' only)


Attach filler panels to ends of housing using two supplied screws shown below.

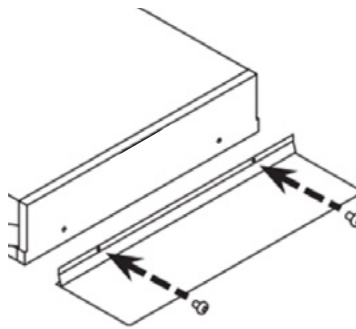

#### Drywall Trim Kit

The drywall trim kit mounting frame assembly is designed to permit use of grid (NEMA G) fixtures in drywall or ceilings requiring flanges.


Extruded aluminum construction with mitered corners. Includes screws for complete assembly. Available in 2'x2', 2'x4' & 1'x4' sizes.




More information available at:

[http://docs.ledalite.com/download/pdf/ID-Recessed\\_Drywall\\_Kits.pdf](http://docs.ledalite.com/download/pdf/ID-Recessed_Drywall_Kits.pdf)

#### Wood Frame Hanger Wire



Wood frame and screws supplied by others.



Hanger wires supplied by others.

# Shine recessed

## Imperial & metric sizes

### Specifications

#### Optical System

Optical system consists of highly reflective powder coated interior reflectors and three flat acrylic lenses.

#### Finish

Housing and Frame: Post-painted, high quality powder coat. Available in white.

#### Housing

Die-formed, post-painted, 22 & 24 gauge cold-rolled steel. Wire entrance is positioned on the side and/or top of housing to allow easy wiring access for installation. Access to boards and drivers from below via side lens cavity. T-bar clips built into the luminaire ends for quick and easy installation. Optional perforated or solid filler panels for 20"x4' fixtures to accommodate 60" ceiling grid.

#### Weight

Maximum 40lbs (2'x4' with Battery Pack).

#### Electrical

LED boards are easily field replaceable, if required. Fixtures are factory pre-wired and tested for all circuits and backup battery packs; all leads pulled to a side access with cover plate.

#### Standard Drivers

Advance Xitanium 0-10V, 1% Dimming

Advance Sensor Ready, 5% Dimming

Lutron EcoSystem LDE1, 1% Dimming with Soft-On and Fade-to-Black

Class 2 rated output.

Consult Ledalite for other available drivers.

#### Standard Battery Pack

Bodine, 90 min, 10W, Class 2 rated output, Emergency lumen output = 10W x luminaire efficacy x 1.1. Typical output: 1300lm.

#### Lumen Maintenance

LEDs have been tested by the manufacturer in accordance with IESNA LM-80-08. At an ambient temperature of 25°C, the LED lumen maintenance expectation according to IES TM-21-11 is: L80 (10k) >60,000 hrs (Reported methodology).

#### Source Color

LEDs rated for color rendering of:

CRI >90 & R9>50

Fixture to fixture color accuracy within 2 SDCM.

#### Mounting

Compatible with 9/16" & 15/16" lay-in acoustical ceilings using exposed grid suspension (NEMA type G). For 9/16" slot T-grid ceilings, fixture will sit 5/16" above bottom of Tee. Integrated tabs are provided for different T-grid heights. Optional drywall kit trim mount can be fastened to a wood frame or installed with hangar wire.

#### Wiring

Optional armored cable flex whips are supplied in 6' lengths.

#### Approvals

Certified to UL & CSA Standards. City of Chicago Approved CCEA (housing option C).

Certain product configurations are DesignLights Consortium qualified. Please see the DLC QPL list for exact catalog numbers under DLC Family Code RRRXLU.

[www.designlights.org/QPL](http://www.designlights.org/QPL)

Select Shine configurations contribute toward satisfying features L06, L07 and L08 under the WELL v2 Building Standard®.

#### Warranty

Five-year luminaire limited warranty including LED boards and driver.

[www.signify.com/warranties](http://www.signify.com/warranties)

#### Environment

Type IC, rated for dry & damp locations in ambient operating temperatures of 25°C. Many luminaire components, such as reflectors, refractors, lenses, and LEDs are made from various types of plastics which can be adversely affected by airborne contaminants. If sulfur based chemicals, petroleum based products, cleaning solutions, or other contaminants are expected in the intended area of use, consult factory for compatibility. Damage caused by sulfur, chlorine, petroleum based solution or other contaminants are not covered under warranty.

#### QuickShip

10-day QuickShip available for most configurations upon request. More information available at:

[www.signify.com/en-us/brands/ledalite/about-us/quickship](http://www.signify.com/en-us/brands/ledalite/about-us/quickship)

# Shine recessed

## Imperial & metric sizes

### Wireless Controls Options

#### Interact Pro scalable sensor for Foundation, Advanced & Enterprise tiers (CS an evolution of SpaceWise):

- CS is a connected sensor with integral occupancy and daylight sensing and supports wireless mesh connectivity.
- The sensor works in the Foundation mode (similar to SpaceWise) when configured without a gateway or in an Interact Pro Advanced or Enterprise mode if a compatible gateway is used.
- Interact Pro includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & Bluetooth connectivity. The App provides flexibility to choose between a gateway or non gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely and use IRT9015 remote onsite to identify and group devices together.
- Compatible with SWS200 wireless scene switch, wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1).
- For more information on Interact Pro visit: [www.interact-lighting.com/interactproscalablesystem](http://www.interact-lighting.com/interactproscalablesystem)

#### Emergency Options (R):

- Power Sensing (Factory default) – Recommended
- UL924 option requires unswitched power sense line, absence of voltage on the normal circuit triggers luminaire to 100% output.
- Power Interruption Detection (Field option)
- Detects AC power interruption >30ms triggers 90 minute emergency mode with luminaire at 100% output.

#### Interact Pro scalable sensor bundles for Enterprise tier (SB):

- SB option, in addition to occupancy and daylight sensing, supports advanced IoT capabilities such as people estimation analysis, desk level temperature & humidity sensing, noise classification, and BLE beacon.
- Compatible with SWS200 wireless scene switch, wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1).
- Use Interact software and insights to increase building efficiency, achieve building wide integration and optimize space through occupancy analytics.
- Requires compatible Gateway and internet connectivity for commissioning. For more information, visit: [www.interact-lighting.com/office](http://www.interact-lighting.com/office)

### Wired Controls Options

#### Interact Office Wired PoE (IO & SB):

- PoE based IoT connected lighting solution for large enterprises that span across multiple floors, buildings and require multiple gateways.
- Use Interact software and insights to increase building efficiency, achieve building wide integration and optimize space through occupancy analytics.
- Integral sensor option for occupancy sensing (PIR) and/or daylight harvesting available for additional energy savings.
- SB option, in addition to occupancy and daylight sensing, supports advanced IoT capabilities such as people estimation analysis, desk level temperature & humidity sensing, noise classification, and BLE beacon.
- Optional integral emergency controller and battery pack provides backup lighting in the case of a power outage. Test switch and indicator light mounted on the chassis.
- Emergency battery has a 3 month pre-installed shelf life, and must be stored and installed in environments of -20°C to 30°C (-4F to 86F) ambient, and 45-85% relative humidity.
- For more information on Interact Office Wired visit: [www.interact-lighting.com/office](http://www.interact-lighting.com/office)

Note: Signify Interact Office Luminaires are not sold individually and are only compatible with Signify's Interact Office control system & software. The system requires a compatible back-end IT infrastructure for normal operations, please consult your Signify representative for additional information.

#### Tunable White:

- Tunable White is available in Interact Office Wired PoE luminaires. Other control options for Tunable White with DALI (DT6 or DT8), 0-10V, Lutron T Series or DMX control are available via an Engineered-to-Order (ETO) request.
- Signify tunable white solutions are designed to help maximize the influence of lighting on your daily life.
- Dynamic behaviors via scheduled lighting recipes mimicking daylight patterns or supporting biorhythms.
- Scene setting via lighting pre-sets based on various combinations of lighting color temperature and intensity.

Interact Pro scalable sensor option codes across Genlyte product lines

	Evokit	Day-Brite	Ledalite	Lightolier
ZeeBee + Bluetooth + Sensing	SWZCS	SWZCS	CS	SBA accessory (external)
ZeeBee + Bluetooth	RADIO	RADIO	RA	RA
ZeeBee + Bluetooth + Sensing + Environmental data	IAOSB	IAOSB	SB	SB
ZeeBee + Highbay + Sensing	-	SWZCSH	-	-

# Shine recessed


## Imperial & metric sizes

Interact Pro scalable system			
	Foundation	Advanced	Enterprise
Dimming, grouping, and zoning	✓	✓	✓
Bluetooth and ZigBee enabled	✓	✓	✓
Motion sensing and daylight harvesting	✓	✓	✓
Integration with 0-10V and phase dimming fixtures	✓	✓	✓
Code compliance	✓	✓	✓
Granular dimming and dwell time	✓	✓	✓
Energy reporting and monitoring		✓	✓
Scheduling		✓	✓
Demand response		✓	✓
BMS integration (BACnet)			✓
Floor plan visualization			✓
IoT sensors for wellness			✓
IoT Apps for productivity			✓

### Currently supported maximum system size

To be able to design the lighting system correctly for the customer, it is important to know the prime characteristics of the system, its possibilities and limitations.

System level	
Total number of gateways	Unlimited
Total number of devices	200 per network
• luminaires with integrated sensors	150
• smart TLEDS	150
Total number of ZGP devices (sensors and switches)	50
• sensors	30
• switches	50
• zones and groups	64
Group level	
Recommended number of lights	40 (recommended 25)
Number of ZGP devices	5
Number of scenes	16

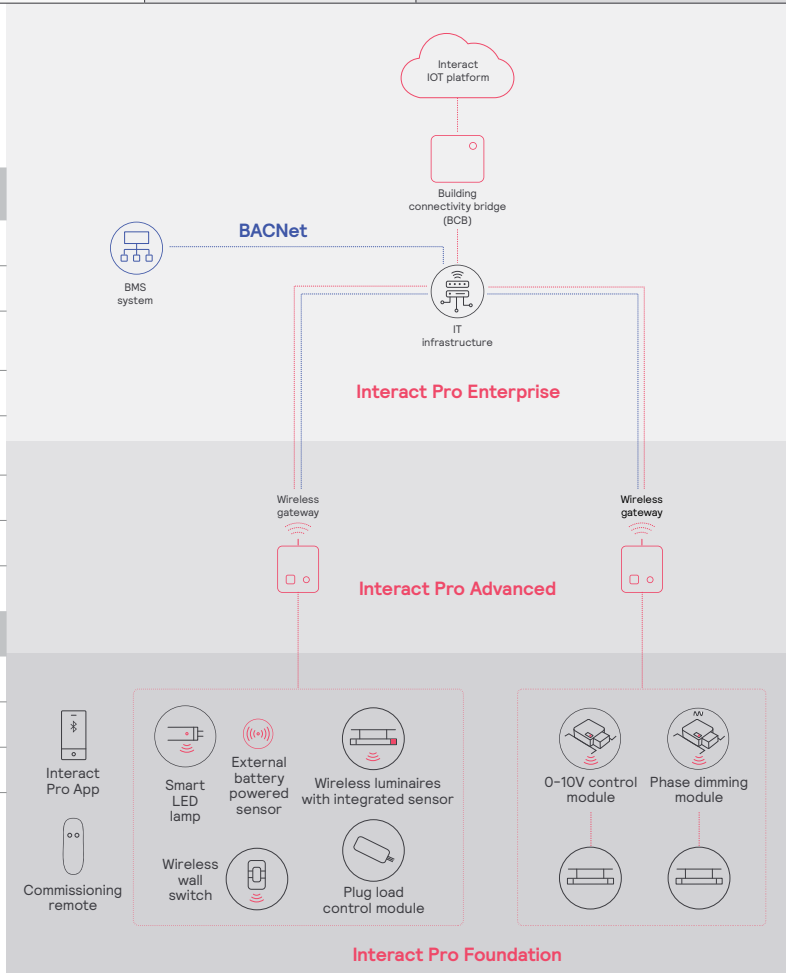

# Shine recessed

## Imperial & metric sizes

### Colorimetry

Shine recessed (33xx) AccuRender Static White

Nominal CRI & CCT		CRI 90, 2700K	CRI 90, 3000K	CRI 90, 3500K	CRI 90, 4000K	CRI 90, 5000K
CIE 013.3-1995 <sup>1</sup>	CRI $R_a$	94	93	93	93	93
	$R_3$	55	57	59	64	68
	$G_s$	99	99	99	99	99
	$C_9$	93	93	93	93	94
IES TM-30-18 <sup>2</sup>	$R_f$	92	91	91	91	90
	$R_{f,h_1}$	90	90	90	91	89
	$R_g$	100	100	99	100	100
	$R_{cs,h_1}$	-6%	-5%	-6%	-5%	-5%
MDER <sup>3</sup>		0.45	0.51	0.58	0.65	0.81

1. Color Rendering Index (CRI Ra) and Strong Red (R9) are calculated in accordance with CIE 013.3-1995. Color Gamut index (Ga) and red chroma Index (C9) are CIE based properties using the Global Lighting Association's calculation tool.

2. Fidelity Index (Rf), Red Fidelity Index (Rf,h1), Gamut Index (Rg), and Red Local Chroma Shift (Rcs,h1) are calculated in accordance with IES TM-30-18.-18.

3. Melanopic Daylight Efficacy Ratio (MDER) is the measure for "spectral melanopic efficiency" as defined in CIE S 026-2018.

# Shine recessed

## Imperial & metric sizes

### Photometry

2'x2' (22)

Click "PDF" or "IES" text to download

Nominal CRI & CCT		CRI 90, 2700K					CRI 90, 3000K					CRI 90, 3500K					CRI 90, 4000K					CRI 90, 5000K				
Nominal Lumen Package	Watts	Flux	Efficacy (LPW)	UGR*	Photometry Report	IES File	Flux	Efficacy (LPW)	UGR*	Photometry Report	IES File	Flux	Efficacy (LPW)	UGR*	Photometry Report	IES File	Flux	Efficacy (LPW)	UGR*	Photometry Report	IES File	Flux	Efficacy (LPW)	UGR*	Photometry Report	IES File
5000	45.3	4,623	102.1	20.5	<a href="#">PDF</a>	<a href="#">IES</a>	4,755	105.0	20.6	<a href="#">PDF</a>	<a href="#">IES</a>	5,003	110.4	20.8	<a href="#">PDF</a>	<a href="#">IES</a>	4,988	110.1	20.8	<a href="#">PDF</a>	<a href="#">IES</a>	5,114	112.9	20.9	<a href="#">PDF</a>	<a href="#">IES</a>
4500	40.5	4,153	102.5	20.1	<a href="#">PDF</a>	<a href="#">IES</a>	4,273	105.5	20.2	<a href="#">PDF</a>	<a href="#">IES</a>	4,491	110.9	20.4	<a href="#">PDF</a>	<a href="#">IES</a>	4,482	110.7	20.4	<a href="#">PDF</a>	<a href="#">IES</a>	4,593	113.4	20.5	<a href="#">PDF</a>	<a href="#">IES</a>
4000	35.4	3,706	104.7	19.8	<a href="#">PDF</a>	<a href="#">IES</a>	3,814	107.7	19.8	<a href="#">PDF</a>	<a href="#">IES</a>	4,004	113.1	20.0	<a href="#">PDF</a>	<a href="#">IES</a>	4,000	113.0	20.0	<a href="#">PDF</a>	<a href="#">IES</a>	4,099	115.8	20.1	<a href="#">PDF</a>	<a href="#">IES</a>
3500	30.6	3,247	106.1	19.3	<a href="#">PDF</a>	<a href="#">IES</a>	3,342	109.2	19.4	<a href="#">PDF</a>	<a href="#">IES</a>	3,506	114.6	19.6	<a href="#">PDF</a>	<a href="#">IES</a>	3,506	114.6	19.6	<a href="#">PDF</a>	<a href="#">IES</a>	3,592	117.4	19.6	<a href="#">PDF</a>	<a href="#">IES</a>
3000	26.1	2,777	106.4	18.7	<a href="#">PDF</a>	<a href="#">IES</a>	2,859	109.5	18.8	<a href="#">PDF</a>	<a href="#">IES</a>	2,998	114.9	19.0	<a href="#">PDF</a>	<a href="#">IES</a>	3,000	114.9	19.0	<a href="#">PDF</a>	<a href="#">IES</a>	3,072	117.7	19.1	<a href="#">PDF</a>	<a href="#">IES</a>
2500	21.8	2,316	106.2	18.1	<a href="#">PDF</a>	<a href="#">IES</a>	2,386	109.4	18.2	<a href="#">PDF</a>	<a href="#">IES</a>	2,500	114.7	18.4	<a href="#">PDF</a>	<a href="#">IES</a>	2,502	114.8	18.4	<a href="#">PDF</a>	<a href="#">IES</a>	2,561	117.5	18.5	<a href="#">PDF</a>	<a href="#">IES</a>

\*UGR given at 3500K, based on 4Hx8Hx0.25H. UGR can be calculated at other CCTs by importing the ies file into lighting design software.


	CANDELA DISTRIBUTION					Flux Lumens
	0	22.5	45	67.5	90	
0	1534	1534	1534	1534	1534	
5	1517	1526	1533	1540	1545	146
15	1438	1467	1500	1537	1542	423
25	1294	1354	1378	1430	1425	635
35	1106	1178	1181	1227	1208	741
45	867	937	944	978	950	727
55	639	689	682	718	703	616
65	415	440	431	459	439	436
75	206	220	206	220	209	228
85	43	46	37	40	29	52
90	0	0	0	0	0	
95	0	0	0	0	0	
105	0	0	0	0	0	
115	0	0	0	0	0	
125	0	0	0	0	0	
135	0	0	0	0	0	
145	0	0	0	0	0	
155	0	0	0	0	0	
165	0	0	0	0	0	
175	0	0	0	0	0	
180	0	0	0	0	0	

COEFFICIENTS OF UTILIZATION (%)													
Pc---	80				70				50				0
Pw---	70	50	30	10	70	50	30	50	30	10	0	0	
ROR													
0	119	119	119	119	116	116	116	111	111	111	100		
1	109	105	101	97	107	103	99	98	95	93	85		
2	100	92	85	80	97	90	84	87	82	77	72		
3	91	81	73	67	89	80	72	77	70	65	61		
4	84	72	64	57	82	71	63	68	61	56	52		
5	77	65	56	50	75	64	55	62	54	49	46		
6	71	58	50	43	70	57	49	56	48	43	40		
7	66	53	44	38	65	52	44	51	43	38	36		
8	62	49	40	34	60	48	40	47	39	34	32		
9	58	45	37	31	56	44	36	43	36	31	29		
10	54	41	33	28	53	41	33	40	33	28	26		

\* Based on a floor reflectance of 0.2

ZONAL LUMEN SUMMARY			
Zone	Lumens	%Fixture	%Lamp
0-30	1204	30.1%	30.1%
0-40	1944	48.6%	48.6%
0-60	3288	82.1%	82.1%
0-90	4004	100.0%	100.0%
90-130	0	0.0%	0.0%
90-150	0	0.0%	0.0%
90-180	0	0.0%	0.0%
0-180	4004	100.0%	100.0%

AVG LUMINANCE (cd/m <sup>2</sup> )			
	0	45	90
0	4549	4549	4549
5	4516	4562	4599
15	4415	4605	4734
25	4233	4508	4663
35	4004	4275	4372
45	3635	3957	3985
55	3301	3528	3635
65	2912	3022	3080
75	2360	2358	2391
85	1453	1266	1000

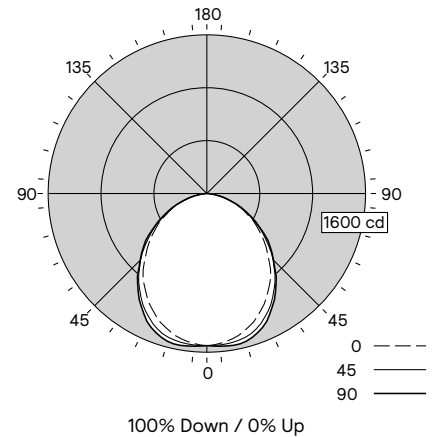

\*Photometric data shown is for 4000lm, 3500K, 90 CRI configuration.



# Shine recessed

## Imperial & metric sizes

### Photometry

2'x4' (24)

Click "PDF" or "IES" text to download

Nominal CRI & CCT		CRI 90, 2700K					CRI 90, 3000K					CRI 90, 3500K					CRI 90, 4000K					CRI 90, 5000K				
Nominal Lumen Package	Watts	Flux	Efficacy (LPW)	UGR*	Photometry Report	IES File	Flux	Efficacy (LPW)	UGR*	Photometry Report	IES File	Flux	Efficacy (LPW)	UGR*	Photometry Report	IES File	Flux	Efficacy (LPW)	UGR*	Photometry Report	IES File	Flux	Efficacy (LPW)	UGR*	Photometry Report	IES File
8000	63.5	7,403	116.6	19.9	PDF	IES	7,621	120.0	20.0	PDF	IES	7,997	125.9	20.1	PDF	IES	7,990	125.8	20.1	PDF	IES	8,188	128.9	20.2	PDF	IES
7500	59.0	6,946	117.7	19.6	PDF	IES	7,154	121.3	19.7	PDF	IES	7,504	127.2	19.9	PDF	IES	7,496	127.1	19.9	PDF	IES	7,682	130.2	20.0	PDF	IES
7000	54.6	6,485	118.8	19.4	PDF	IES	6,681	122.4	19.5	PDF	IES	7,005	128.3	19.7	PDF	IES	6,999	128.2	19.7	PDF	IES	7,171	131.3	19.7	PDF	IES
6500	50.4	6,019	119.4	19.1	PDF	IES	6,202	123.1	19.2	PDF	IES	6,501	129.0	19.4	PDF	IES	6,496	128.9	19.4	PDF	IES	6,655	132.0	19.5	PDF	IES
6000	46.1	5,548	120.3	18.9	PDF	IES	5,717	124.0	19.0	PDF	IES	5,992	130.0	19.1	PDF	IES	5,989	129.9	19.1	PDF	IES	6,133	133.0	19.2	PDF	IES
5500	41.9	5,093	121.6	18.6	PDF	IES	5,249	125.3	18.7	PDF	IES	5,500	131.3	18.8	PDF	IES	5,499	131.2	18.8	PDF	IES	5,630	134.4	18.9	PDF	IES
5000	38.4	4,634	120.7	18.2	PDF	IES	4,776	124.4	18.3	PDF	IES	5,004	130.3	18.5	PDF	IES	5,005	130.3	18.5	PDF	IES	5,122	133.4	18.6	PDF	IES
4500	34.4	4,172	121.3	17.9	PDF	IES	4,299	125.0	18.0	PDF	IES	4,503	130.9	18.1	PDF	IES	4,507	131.0	18.1	PDF	IES	4,610	134.0	18.2	PDF	IES
4000	30.4	3,705	121.9	17.4	PDF	IES	3,817	125.6	17.6	PDF	IES	3,998	131.5	17.7	PDF	IES	4,004	131.7	17.7	PDF	IES	4,093	134.6	17.8	PDF	IES

\* UGR given at 3500K, based on 4Hx8Hx0.25H. UGR can be calculated at other CCTs by importing the ies file into lighting design software.


CANDELA DISTRIBUTION						Flux
	0	22.5	45	67.5	90	Lumens
0	2322	2322	2322	2322	2322	
5	2304	2312	2313	2323	2325	220
15	2184	2223	2248	2286	2279	634
25	2003	2048	2074	2103	2079	950
35	1704	1781	1772	1789	1757	1106
45	1381	1432	1399	1416	1377	1086
55	1019	1069	1023	1023	983	918
65	658	676	657	653	611	651
75	325	353	310	315	289	343
85	72	78	59	61	45	83
90	0	0	0	0	0	
95	0	0	0	0	0	
105	0	0	0	0	0	
115	0	0	0	0	0	
125	0	0	0	0	0	
135	0	0	0	0	0	
145	0	0	0	0	0	
155	0	0	0	0	0	
165	0	0	0	0	0	
175	0	0	0	0	0	
180	0	0	0	0	0	

COEFFICIENTS OF UTILIZATION (%)													
Pc---	80				70				50				0
Pw---	70	50	30	10	70	50	30	50	30	10	0	0	
RCR													
0	119	119	119	119	116	116	116	111	111	111	100		
1	109	105	101	97	107	103	99	98	95	92	85		
2	100	92	85	80	97	90	84	87	81	77	72		
3	91	81	73	67	89	80	72	77	70	65	61		
4	84	72	64	57	82	71	63	68	61	56	52		
5	77	65	56	49	75	64	55	61	54	49	46		
6	71	58	50	43	70	57	49	56	48	43	40		
7	66	53	45	38	65	52	44	51	43	38	36		
8	62	49	40	34	60	48	40	47	39	34	32		
9	58	45	37	31	56	44	36	43	36	31	29		
10	54	41	33	28	53	41	33	40	33	28	26		

\* Based on a floor reflectance of 0.2

ZONAL LUMEN SUMMARY			
Zone	Lumens	%Fixture	%Lamp
0-30	1805	30.1%	30.1%
0-40	2910	48.6%	48.6%
0-60	4915	82.0%	82.0%
0-90	5992	100.0%	100.0%
90-130	0	0.0%	0.0%
90-150	0	0.0%	0.0%
90-180	0	0.0%	0.0%
0-180	5992	100.0%	100.0%

AVG LUMINANCE (cd/m²)			
	0	45	90
0	3354	3354	3354
5	3341	3354	3371
15	3266	3361	3408
25	3193	3305	3313
35	3005	3125	3099
45	2822	2858	2813
55	2566	2575	2475
65	2248	2246	2088
75	1816	1732	1615
85	1195	973	746

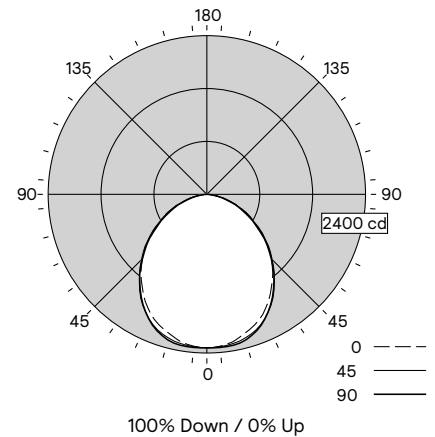

\*Photometric data shown is for 6000lm, 3500K, 90 CRI configuration.

# Shine recessed

## Imperial & metric sizes

### Photometry

1'x4' (14)

Click "PDF" or "IES" text to download

Nominal CRI & CCT		CRI 90, 2700K					CRI 90, 3000K					CRI 90, 3500K					CRI 90, 4000K					CRI 90, 5000K				
Nominal Lumen Package	Watts	Flux	Efficacy (L/PW)	UGR *	Photometry Report	IES File	Flux	Efficacy (L/PW)	UGR *	Photometry Report	IES File	Flux	Efficacy (L/PW)	UGR *	Photometry Report	IES File	Flux	Efficacy (L/PW)	UGR *	Photometry Report	IES File	Flux	Efficacy (L/PW)	UGR *	Photometry Report	IES File
5000	48.0	4,613	96.1	21.0	PDF	IES	4,745	98.9	21.1	PDF	IES	4,995	104.1	21.3	PDF	IES	4,978	103.7	21.3	PDF	IES	5,105	106.4	21.4	PDF	IES
4500	42.2	4,156	98.5	20.6	PDF	IES	4,275	101.3	20.7	PDF	IES	4,495	106.5	20.9	PDF	IES	4,484	106.3	20.9	PDF	IES	4,596	108.9	21.0	PDF	IES
4000	37.4	3,701	99.0	20.2	PDF	IES	3,808	101.8	20.3	PDF	IES	4,000	107.0	20.5	PDF	IES	3,995	106.8	20.5	PDF	IES	4,093	109.4	20.6	PDF	IES
3500	32.1	3,234	100.7	19.8	PDF	IES	3,328	103.7	19.9	PDF	IES	3,492	108.8	20.0	PDF	IES	3,491	108.8	20.0	PDF	IES	3,576	111.4	20.1	PDF	IES
3000	27.3	2,771	101.5	19.2	PDF	IES	2,853	104.5	19.3	PDF	IES	2,991	109.6	19.5	PDF	IES	2,993	109.6	19.5	PDF	IES	3,065	112.3	19.6	PDF	IES
2500	22.9	2,316	101.1	18.6	PDF	IES	2,386	104.2	18.7	PDF	IES	2,500	109.2	18.9	PDF	IES	2,502	109.3	18.9	PDF	IES	2,561	111.8	19.0	PDF	IES

\* UGR given at 3500K, based on 4Hx8Hx0.25H. UGR can be calculated at other CCTs by importing the ies file into lighting design software.


CANDELA DISTRIBUTION						Flux
	0	22.5	45	67.5	90	Lumens
0	1717	1717	1717	1717	1717	
5	1704	1706	1698	1701	1698	161
15	1616	1619	1698	1613	1593	452
25	1445	1461	1419	1414	1373	655
35	1216	1245	1170	1157	1118	742
45	979	990	915	890	865	717
55	720	718	650	632	590	597
65	471	465	412	381	362	416
75	236	236	180	168	150	209
85	52	55	31	33	26	50
90	0	0	0	0	0	
95	0	0	0	0	0	
105	0	0	0	0	0	
115	0	0	0	0	0	
125	0	0	0	0	0	
135	0	0	0	0	0	
145	0	0	0	0	0	
155	0	0	0	0	0	
165	0	0	0	0	0	
175	0	0	0	0	0	
180	0	0	0	0	0	

COEFFICIENTS OF UTILIZATION (%)													
Pc---	80				70				50				0
Pw---	70	50	30	10	70	50	30	50	30	10	0	0	
ROR													
0	119	119	119	119	116	116	116	111	111	111	111	100	
1	110	105	101	98	107	103	99	99	96	93	85	85	
2	100	93	86	81	98	91	85	87	82	78	72	72	
3	92	82	74	68	89	80	73	77	71	66	62	62	
4	84	73	65	58	82	72	64	69	62	57	53	53	
5	78	66	57	51	76	64	56	62	55	50	47	47	
6	72	59	51	45	70	58	50	57	49	44	41	41	
7	67	54	46	40	65	53	45	52	44	39	37	37	
8	63	49	41	36	61	49	41	47	40	35	33	33	
9	59	46	38	32	57	45	37	44	37	32	30	30	
10	55	42	34	29	54	42	34	41	34	29	27	27	

\* Based on a floor reflectance of 0.2

ZONAL LUMEN SUMMARY			
Zone	Lumens	%Fixture	%Lamp
0-30	1269	31.7%	31.7%
0-40	2011	50.3%	50.3%
0-60	3325	83.1%	83.1%
0-90	4000	100.0%	100.0%
90-130	0	0.0%	0.0%
90-150	0	0.0%	0.0%
90-180	0	0.0%	0.0%
0-180	4000	100.0%	100.0%

AVG LUMINANCE (cd/m <sup>2</sup> )			
	0	45	90
0	5206	5206	5206
5	5185	5167	5168
15	5072	5016	5000
25	4833	4748	4592
35	4501	4332	4137
45	4199	3925	3709
55	3807	3437	3116
65	3377	2956	2594
75	2768	2106	1751
85	1795	1075	915

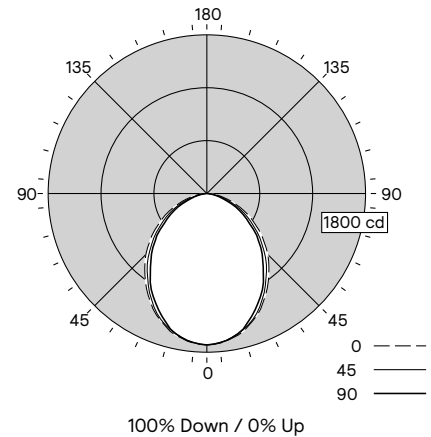

\*Photometric data shown is for 4000lm, 3500K, 90 CRI configuration.

# Shine recessed

## Imperial & metric sizes

### Footnotes from page 1 ordering guide

1. Nominal values within a range. Consult photometry data for CRI, CCT, lumens & distribution of chosen configuration
2. Not all wiring types are available with all configurations. Consult Ledalite for a complete list of available options.
3. Flex whips are installed, Drywall Trim Kits ship separately.
4. Filler Panels available for 20"x4' size to accommodate a 20"x60" grid system.
5. Air Return version is not available in 1'x, 300mmx or 20"x sizes. Note for 20"x4' size, Air Return Filler Panels are available.
6. 347V not available with Battery Pack, DALI, Lutron EcoSystem or Sensor Ready drivers or Interact Pro options.
7. 1'x1' & 300x300mm sizes not available with Battery Pack, DALI, Lutron EcoSystem or Sensor Ready drivers or Interact Pro options.
8. Interact options require separate controls hardware by Signify.
9. This option is qualified as Engineered-to-Order (ETO) ready. Other options not shown here may be possible via an ETO request. Lead times and minimum order quantities may vary, please consult factory.
10. UL924 listed sensor bypass relay is factory installed between driver & sensor. Must be ordered in same module as integral sensing option. Must be installed in conjunction with a UL1008 device.
11. Must order IRT9015 Interact commissioning remote with each system order.

**Note:** Due to continuing product improvements, Ledalite reserves the right to change the specifications without notice.

