




Shown with lamps, not included



CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Quick-wire access plate in back of fixture housing for easy attachment of incoming power supply
- Shallow fixture depth of less than 4" allows fixture placement near the ceiling for maximum space utilization and reduces damage incurred from material handling equipment
- Variety of mounting options
- TLED fixtures provide on-site lamping flexibility and simple installation
- Made Right Here® in the USA



SPECIFICATIONS

- HOUSING** – Die-formed 22-gauge C.R.S. housing.
- REFLECTOR** – Precision-formed 95% reflective highly specular aluminum.
- FINISH** – 92% minimum average reflective white polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL** – Prewired for Type B, single or double end, non-shunted LED tubes, lamps by others.
- MOUNTING** – Suspended. Indoor applications only.
- LABELS** –
 - UL/CUL listed as LED suspended luminaire suitable for dry or damp locations.
 - Complies with the Buy American Act and other federal regulations. Request certification at hew.com/baa.
- WARRANTY** – 5-year limited fixture warranty, see hew.com/warranty.

ORDERING EXAMPLE: GL - 4 - 44T8LS/B - OPTIONS - UNV

ORDERING INFO

SERIES	NOMINAL LENGTH	TOTAL LAMPS	LAMP SIZE	WIRING	LAMP TYPE
GL	4 4'	T5 Fixtures 3, 4, 6, or 8 T8 Fixtures 4, 6, or 8	4T5L 4' T5 LED tube 4T8L 4' T8 LED tube	S Single end ⁽¹⁾ D Double end	B Type B

OPTIONS

See page 2 for OCCUPANCY SENSOR OPTIONS.

WD	Wide distribution ⁽²⁾
UP	Uplight apertures
WG11	11-gauge wireguard, white powder coated
VBY	(2) Y-hangers
GC2/Y18/_	Cable suspension system (1 pair)
GC2/L/10	10' cable suspension system with loop ⁽³⁾
3SB	3" spacer bracket (1 pair)
HUB MT 3/4"	Cast iron hub and junction box for single 3/4" pendant mount ⁽⁴⁾
HUB/HOOK MT	Cast iron hub with mounting hook ⁽⁵⁾
HOOK/CABLE	Hook and cable mounting kit, 10'
S7238/B	72" cord, 3-conductor, No. 18 AWG, black
PHSCHA118	Piano hinge steel door frame, clear, high-temperature, non-prismatic acrylic, .118" thick
SCHA118	Steel door frame, clear, high-temperature, non-prismatic acrylic, .118" thick

VOLTAGE

UNV 120-277V


NOTES

- ¹ Due to differences in wiring of TLED lamps, samples of specified lamp must be provided at time of fixture order.
- ² White reflector - fixture distribution determined by selected lamp.


- ³ Requires VBY hanger.
- ⁴ Shipped not attached.
- ⁵ Shipped not attached.



FIXTURE DETAILS

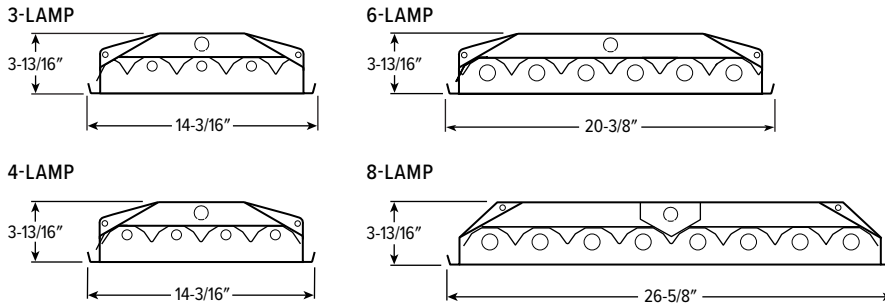


BACK VIEW DETAILS

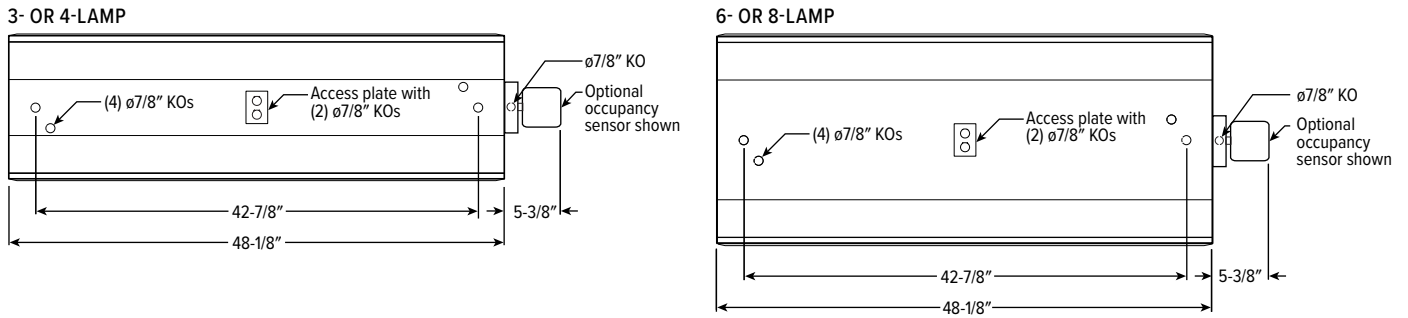

MOUNTING ACCESSORIES


CABLE SUSPENSION KITS

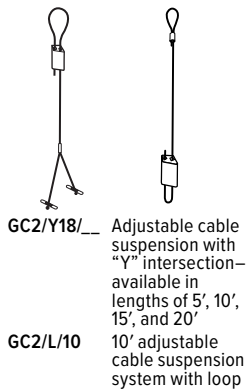


VBY HANGER




SPACER BRACKET



HUB MOUNTS

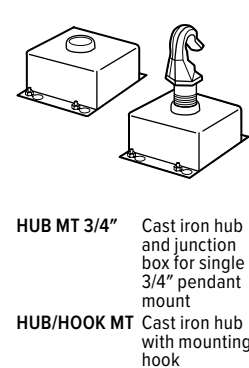

HOOK AND CABLE




OCCUPANCY SENSOR OPTIONS

OCCWS-HBP-111-L7-120/277/347 Wattstopper PIR motion and daylight hold off sensor, 120/277/347V. Adjustable via remote. Optional FSIR-100 remote controller available.

FSIR-100 Remote controller for HBP-111 sensor. Please specify quantity required per project. Ordered and shipped separately.

SPECIFICATIONS	
TYPE	PIR Motion + Daylight Hold Off
MOUNTING HEIGHT	15' – 40'
DETECTION ANGLE	360°
TEMPERATURE RANGE	0° to 70°C
RELATIVE HUMIDITY	5 to 95%, non-condensing
COMMISSIONING	FSIR-100 Remote

SENSOR COVERAGE PATTERNS

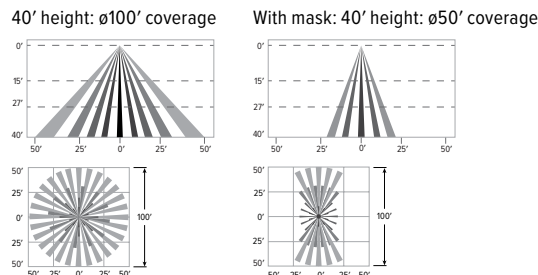

SENSOR DETAIL

