

CENTRIC

Interior Pendant









9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

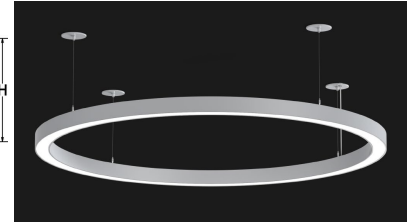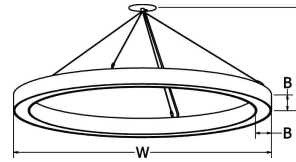- LED: High efficiency 90CRI mid-power LEDs. Universal voltage.
- Uplight: Optional uplight is wired on a second circuit.
- Lower Output: Lamping code ending with LO features lower lumen output.
- LED Driver: Must be mounted within 25ft from fixture body.
- Finish: Highly durable oven cured no VOC premium powder coat.
- Canopy: Matches fixture finish.
- Cable Hanger: Standard 150" cable and white cord for on-site adjustability.
- Modifications: Consult factory for modified fixture sizes and lumen packages.
- Surge Protection: External surge protector provided as standard.
- LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, and DMX available upon request.



SAMPLE CATALOG NUMBER:						
GL-2307-		B-	B-	BLK-	1-	A
MODEL NO.		LAMPING		FINISH	HANGER	OPTIONS
GL-2305	W in 24" 7lbs B in 3" x 3" 3.2kg H in 11"-145"	Down: A. LED30 B. LED35 C. LED40 D. LED30LO E. LED35LO F. LED40LO	Up: A. LED30 B. LED35 C. LED40 D. LED30LO E. LED35LO F. LED40LO G. NONE	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue	1. Cable - Standard  Drivers mounted remotely. See Centric Hanger Guide for more information.	A. No Options BC. Black Cord Fixture supplied with black power cord. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-2306	W in 36" 10lbs B in 3" x 3" 4.5kg H in 18.75"-145"				2. Oversized  Drivers mounted inside oversized canopy. See Centric Hanger Guide for more information.	
GL-2307	W in 48" 14lbs B in 3" x 3" 6.3kg H in 18.75"-145"				3. Vertical Remote Canopy  Drivers mounted remotely. See Centric Hanger Guide for more information.	
GL-2308	W in 60" 18lbs B in 3" x 3" 8.2kg H in 18.75"-145"				4. Vertical Integral Canopy  Drivers mounted inside 12.5" oversized canopy. See Centric Hanger Guide for more information. Hanger options 1&3 supplied with remote driver box.	
GL-2309	W in 72" 22lbs B in 3" x 3" 10kg H in 18.75"-145"			Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze		
GL-2310	W in 96" 28lbs B in 3" x 3" 12.7kg H in 18.75"-145" Fixture Body Built in Three Segments and Six Acrylic Segments			Premium: SA-Satin Aluminum		
GL-2311	W in 120" 36lbs B in 3" x 3" 16.3kg H in 18.75"-145" Fixture Body Built in Three Segments and Six Acrylic Segments					

All Dimensions are nominal.

Light Source Definition

Fixture	Lumen Output					Code	Low Lumen Output				
	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin		Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
GL-2305	67	+90	50000	4518	3000/3500/4000	GL-2305	36	+90	50000	2788	3000/3500/4000
GL-2306	94	+90	50000	7003	3000/3500/4000	GL-2306	55	+90	50000	4419	3000/3500/4000
GL-2307	132	+90	50000	9804	3000/3500/4000	GL-2307	77	+90	50000	6120	3000/3500/4000
GL-2308	158	+90	50000	11837	3000/3500/4000	GL-2308	91	+90	50000	7364	3000/3500/4000
GL-2309	189	+90	50000	14051	3000/3500/4000	GL-2309	109	+90	50000	8855	3000/3500/4000
GL-2310	236	+90	50000	17801	3000/3500/4000	GL-2310	136	+90	50000	10075	3000/3500/4000
GL-2311	317	+90	50000	22324	3000/3500/4000	GL-2311	182	+90	50000	14064	3000/3500/4000

Wattage & lumens represent output for one side (up or down).

Universal Voltage unless otherwise specified.