

# CENTRIC - Acoustic

## Interior Pendant



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**Acoustic Panel:** 1/2" center acoustic panel reduces noise level in environment.

**LED:** High efficiency 90CRI mid-power LEDs. Universal voltage.

**Uplight:** Optional uplight is wired on a second circuit.

**Lower Output:** Lamping code ending with LO features lower lumen output.

**LED Driver:** Must be mounted within 25ft from fixture body.

**Finish:** Highly durable oven cured no VOC premium powder coat.



**Canopy:** Matches fixture finish.

**Cable Hanger:** Standard 150" cable and white cord for on-site adjustability.

**Modifications:** Consult factory for modified fixture sizes and lumen packages.

**Surge Protection:** External surge protector provided as standard.

**LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, and DMX available upon request.

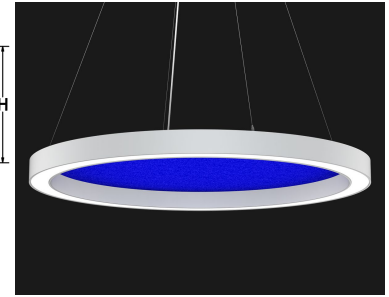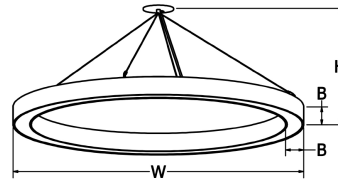

SAMPLE CATALOG NUMBER:						
GL-2317-		B-	B-	BLK-	ABLK-	1- A
MODEL NO.	LAMPING		FINISH	ACOUSTIC	HANGER	OPTIONS
<b>GL-2315</b> 7lbs W 24" 3.2kg B 3" x 3" H 11"-145"	Down: <b>A. LED30</b> <b>B. LED35</b> <b>C. LED40</b> <b>D. LED30LO</b> <b>E. LED35LO</b> <b>F. LED40LO</b>	Up: <b>A. LED30</b> <b>B. LED35</b> <b>C. LED40</b> <b>D. LED30LO</b> <b>E. LED35LO</b> <b>F. LED40LO</b> <b>G. NONE</b>	Standard: Powder Coat <b>BLK</b> -Black <b>BL</b> -Blue <b>GR</b> -Gray <b>LG</b> -Light Gray <b>BE</b> -Beige <b>PAB</b> -Antique Brass <b>PA</b> -Painted Aluminum <b>PTC</b> -Painted Copper <b>WH</b> -White <b>DBZ</b> -Dark Bronze <b>NSN</b> -New Satin Nickel <b>BRN</b> -Brown <b>RD</b> -Red <b>CH</b> -Champagne <b>RG</b> -Reed Green <b>SG</b> -Sungold <b>GM</b> -Gun Metal <b>POR</b> -Oil Rubbed Bronze <b>PG</b> -Pine Green <b>DO</b> -Deep Orange <b>PV</b> -Purple Violet <b>NB</b> -Navy Blue  Textured Powder <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBN</b> -Terra Brown <b>TBZ</b> -Textured Bronze  Premium: <b>SA</b> -Satin Aluminum	Standard: Acoustic <b>ABLK</b> -Black <b>ABL</b> -Blue <b>AGR</b> -Gray <b>ALG</b> -Light Gray <b>ARD</b> -Red  Seamless Acoustic in 24" thru 48" sizes. Seam in 60" & 72".	<b>1. Cable - Standard</b>  Drivers mounted remotely. See Centric Hanger Guide for more information. <b>2. Oversized</b>  Drivers mounted inside oversized canopy. See Centric Hanger Guide for more information. <b>3. Vertical Remote Canopy</b>  Drivers mounted remotely. See Centric Hanger Guide for more information. <b>4. Vertical Integral Canopy</b>  Drivers mounted inside 12.5" oversized canopy. See Centric Hanger Guide for more information. <b>Hanger options 1&amp;3 supplied with remote driver box.</b>	<b>A. No Options</b> <b>BC. Black Cord</b> Fixture supplied with black power cord. <b>EL. Emergency LED</b> Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
<b>GL-2316</b> 10lbs W 36" 4.5kg B 3" x 3" H 18.75"-145"						
<b>GL-2317</b> 14lbs W 48" 6.3kg B 3" x 3" H 18.75"-145"						
<b>GL-2318</b> 18lbs W 60" 8.2kg B 3" x 3" H 18.75"-145"						
<b>GL-2319</b> 22lbs W 72" 10kg B 3" x 3" H 18.75"-145"						

All Dimensions are nominal.

### Light Source Definition

Fixture	Lumen Output					Code	Low Lumen Output				
	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin		Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
GL-2315	67	+90	50000	4518	3000/3500/4000	GL-2315	36	+90	50000	2788	3000/3500/4000
GL-2316	94	+90	50000	7003	3000/3500/4000	GL-2316	55	+90	50000	4419	3000/3500/4000
GL-2317	132	+90	50000	9804	3000/3500/4000	GL-2317	77	+90	50000	6120	3000/3500/4000
GL-2318	158	+90	50000	11837	3000/3500/4000	GL-2318	91	+90	50000	7364	3000/3500/4000
GL-2319	189	+90	50000	14051	3000/3500/4000	GL-2319	109	+90	50000	8855	3000/3500/4000

Wattage & lumens represent output for one side (up or down).

Universal Voltage unless otherwise specified.