

# MERIDIAN

## Interior Pendant



9777 Reavis Park Drive

St. Louis, MO 63123

800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

**LED:** High efficiency 90 CRI mid-power LEDs. Universal voltage.

**Lower Output:** Lamping code ending with LO features lower lumen output.

**LED Dimming:** Standard 1% 0-10V dimming. TRIAC, DALI, and DMX available upon request.

**Acrylic:** High diffusion and consistent light transmission.

**Driver:** Must be mounted within 25ft from fixture body.



**Finish:** Highly durable oven cured no VOC premium powder coat.

**Canopy:** Matches fixture finish.

**Cable Hanger:** Standard 150" cable and white cord for on-site adjustability.

**Modifications:** Consult factory for modified fixture sizes and lumen packages.

**Surge Protection:** External surge protector provided as standard.

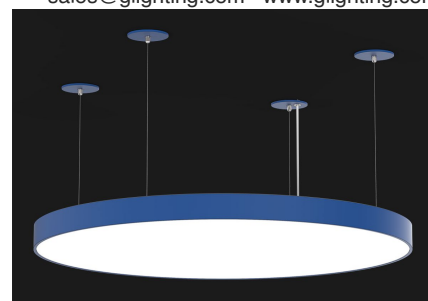

### SAMPLE CATALOG NUMBER:

GL-2342-	B-	BLK-	1-	A
MODEL NO.	LAMPING	FINISH	HANGER	OPTIONS
<b>GL-2339</b> W in 12" 5lbs B in 3" 3.2kg H in 11"-145" Available with hanger 1&2 only	<b>A.</b> LED30 <b>B.</b> LED35 <b>C.</b> LED40 <b>D.</b> LED30LO <b>E.</b> LED35LO <b>F.</b> LED40LO	<b>Standard:</b> Powder Coat <b>BLK-</b> Black <b>BL-</b> Blue <b>GR-</b> Gray <b>LG-</b> Light Gray <b>BE-</b> Beige <b>PAB-</b> Antique Brass <b>PA-</b> Painted Aluminum <b>PTC-</b> Painted Copper <b>WH-</b> White <b>DBZ-</b> Dark Bronze <b>NSN-</b> New Satin Nickel <b>BRN-</b> Brown <b>RD-</b> Red <b>CH-</b> Champagne <b>RG-</b> Reed Green <b>SG-</b> Sungold <b>GM-</b> Gun Metal <b>POR-</b> Oil Rubbed Bronze <b>PG-</b> Pine Green <b>DO-</b> Deep Orange <b>PV-</b> Purple Violet <b>NB-</b> Navy Blue  <b>Textured Powder</b> <b>TLV-</b> Light Verdigris <b>TWH-</b> Textured White <b>TBL-</b> Textured Black <b>TS-</b> Textured Silver <b>TBN-</b> Terra Brown <b>TBZ-</b> Textured Bronze	<b>1. Cable - Standard</b>  Drivers mounted remotely. <b>2. Oversized</b>  Drivers mounted inside oversized canopy. <b>3. Vertical Canopy</b>  Drivers mounted remotely. <b>4. Vertical Integral Canopy</b>  Drivers mounted inside oversized canopy.  Hanger options 1&3 supplied with remote driver box. GL-2339 available with hanger 1&2 only.	<b>A.</b> No Options <b>BC.</b> Black Cord Fixture supplied with black power cord. <b>EL.</b> Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
<b>GL-2340</b> W in 18" 7lbs B in 3" 3.2kg H in 11"-145"				
<b>GL-2341</b> W in 24" 10lbs B in 3" 4.5kg H in 18.75"-145"				
<b>GL-2342</b> W in 30" 14lbs B in 3" 6.3kg H in 18.75"-145"				
<b>GL-2343</b> W in 36" 18lbs B in 3" 8.2kg H in 18.75"-145"				
<b>GL-2344</b> W in 48" 20lbs B in 3" 9.1kg H in 18.75"-145"				

All Dimensions are nominal.

### Light Source Definition

High Lumen Output						Low Lumen Output					
Fixture	Total Wattage	Rated CRI	Delivered Life Hrs	Lumens	Kelvin	Code	Total Wattage	Rated CRI	Delivered Life Hrs	Lumens	Kelvin
GL-2339	13	+90	50000	1073	3000/3500/4000	GL-2339	8	+90	50000	644	3000/3500/4000
GL-2340	26	+90	50000	2202	3000/3500/4000	GL-2340	16	+90	50000	1321	3000/3500/4000
GL-2341	43	+90	50000	3540	3000/3500/4000	GL-2341	29	+90	50000	2124	3000/3500/4000
GL-2342	77	+90	50000	6407	3000/3500/4000	GL-2342	46	+90	50000	3844	3000/3500/4000
GL-2343	110	+90	50000	9132	3000/3500/4000	GL-2343	66	+90	50000	5479	3000/3500/4000
GL-2344	197	+90	50000	16282	3000/3500/4000	GL-2344	118	+90	50000	9769	3000/3500/4000

Universal Voltage unless otherwise specified.

