

Project Name:	Type:
Part Number:	Date:

# SELECTFIT 4" RETROFIT DOWNLIGHT

## SPECIFICATION FEATURES

- **Mechanical** - SELECTFIT, with integrated driver, retrofits existing commercial housings and is field accessible from below the ceiling. Stainless steel spring action clips accommodate 1/2" to 2" ceiling thicknesses.
- **Electrical** - Field select from three lumen outputs using SelectDrive technology. Universal 120-277V or 120V only, 50/60 Hz drivers available. Universal 0-10V drivers dimmable to 5% with low end cutoff. 120V drivers are dimmable to 10% using TRIAC or ELV dimmers.
- **Optical** - Self flanged spun aluminum reflector, painted matte white. Optional clear aluminum trim insert available. High resistance polycarbonate optical lens, with smooth diffusion. 90° beam angle. Field select color temperature between either 3000K/3500K/4000K or 2700/5000K. LED binned to 3-step SDCM to ensure color uniformity, with minimum 80 CRI.
- **Thermal** - Die cast heat sink maximizes passive thermal management and achieves a L70 rated lifetime of 50,000 hours. Ambient temperature rated from -13°F to 95°F (-25°C to 35°C).
- **Compliance and Warranty** - ETL Classified and Listed for wet locations. Certified air-tight per ASTM 283-04. IC Rated for direct contact with insulation. Complies with FCC 47CFR Part 15B consumer limits for EMI/RFI emissions. 5 year parts warranty for complete fixture. Optional 10 Year Extended Warranty available, subject to same terms, conditions and installation requirements as standard 5 Year Warranty.



110422



## BENEFITS

- Field select lumen output
- Field select CCT
- Quick and easy installation
- 0-10V or 120V dimmable
- Long life time, L70 Rated for 50,000 hours

## APPLICATIONS


- Commercial
- Educational
- Retail
- Hospitality
- Outdoor Under Covered Ceilings

## ORDERING INFORMATION

Series	Size	CRI	CCT	Dimming
<input checked="" type="checkbox"/> SLFT SELECTFIT	<input checked="" type="checkbox"/> 4 4" 550 / 750 / 1,000lm	<input checked="" type="checkbox"/> 80 CRI 80	<input type="checkbox"/> CCTS Selectable CCT 3000 / 3500 / 4000K  <input type="checkbox"/> CCT2750* Selectable CCT 2700 / 5000K	<input type="checkbox"/> DIM120V 120V - Line voltage dimming  <input type="checkbox"/> DIM010UNV 120-277V - 0-10V dimming

\*Available in DIM010UNV only

## LINE DRAWINGS

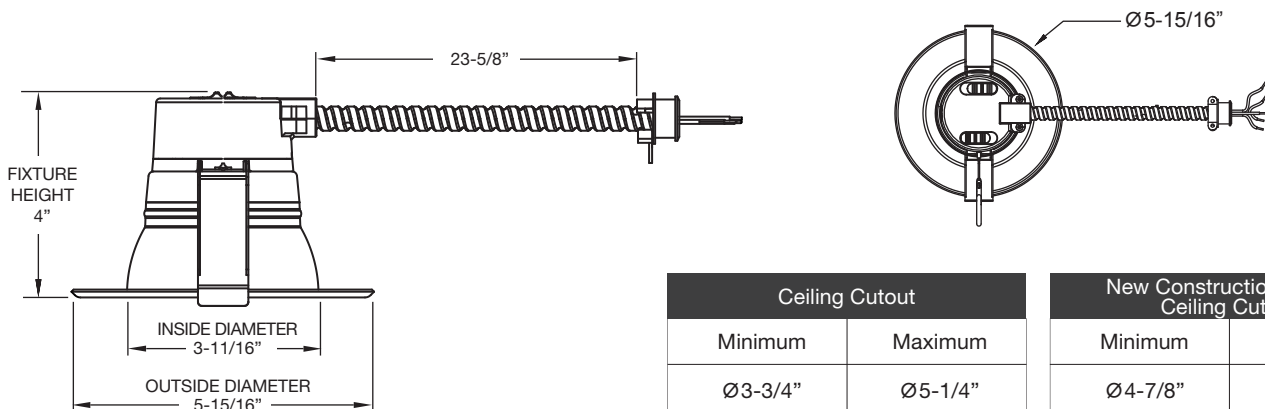

Ceiling Cutout		New Construction Frame Ceiling Cutout	
Minimum	Maximum	Minimum	Maximum
Ø3-3/4"	Ø5-1/4"	Ø4-7/8"	Ø5-5/8"




# SELECTFIT 4" RETROFIT DOWNLIGHT

TECHNICAL INFORMATION						
Dimming	Input Voltage	Input Frequency	Input Current	Input Power	THD Power	Power Factor
DIM120	120V	50 / 60Hz	0.06 / 0.08 / 0.11A	7 / 9 / 12W	<20%	>0.9
DIM010VUNV	120V	50 / 60Hz	0.06 / 0.07 / 0.10A	7 / 9 / 12W	<20%	>0.9
	277V		0.03 / 0.04 / 0.05A			

## PHOTOMETRY

SLFT4/80CCTS/DIM120V (3500K Selected, High)



Lumens: 1037 lm  
 Power: 12 W  
 Efficacy: 87 lm/W  
 CRI: 80+  
 Spacing Criteria: 1  
 Beam Angle: 85°


Candlepower Distribution	
Angle (°)	Average (cd)
0	549
5	546
15	519
25	450
35	355
45	249
55	146
65	59
75	27
85	2
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	9	14
9	7	16
10	6	18
12	4	21
15	2	27

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	405	39
0-40	627	60
0-60	943	91
0-90	1037	100

Lumen Output Coefficient			
CCT	3000K	3500K	4000K
Low Lumen output	0.53	0.57	0.55
Med Lumen output	0.70	0.74	0.71
High Lumen output	0.94	1.00	0.95

SLFT4/80CCT2750/DIM010UNV (5000K Selected, High)



Lumens: 1014 lm  
 Power: 12 W  
 Efficacy: 86 lm/W  
 CRI: 80+  
 Spacing Criteria: 1  
 Beam Angle: 85°

Candlepower Distribution	
Angle (°)	Average (cd)
0	535
5	532
15	505
25	440
35	350
45	241
55	136
65	57
75	27
85	3
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	8	14
9	7	16
10	5	18
12	4	21
15	2	26

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	395	39
0-40	611	60
0-60	921	91
0-90	1014	100

Lumen Output Coefficient		
CCT	2700K	5000K
Low Lumen output	0.54	0.57
Med Lumen output	0.70	0.73
High Lumen output	0.95	1.00



# SELECTFIT 4" RETROFIT DOWNLIGHT

## PERFORMANCE

SLFT4/80CCTS/DIMxxx – LOW/MEDIUM/HIGH – 7 / 9 / 12W - NOMINAL\*






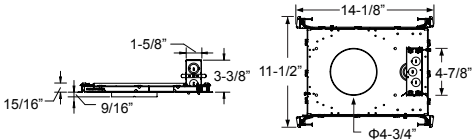

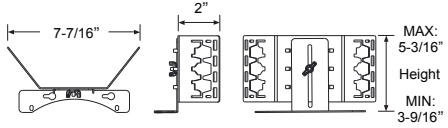





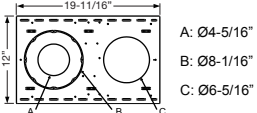
CCT	3000K			3500K			4000K		
	Low	Med	High	Low	Med	High	Low	Med	High
Output									
Lumens	541	714	959	581	755	1020	561	724	969
LPW	77	79	80	83	84	85	80	80	81

SLFT4/80CCT2750/DIMxxx – LOW/MEDIUM/HIGH – 7 / 9 / 12W - NOMINAL\*

CCT2750	2700K			5000K		
	Low	Med	High	Low	Med	High
Output						
Lumens	540	700	950	570	730	1000
LPW	77	78	79	81	81	83

\*The above values are nominal only and may vary slightly depending on the dimming and voltage applied








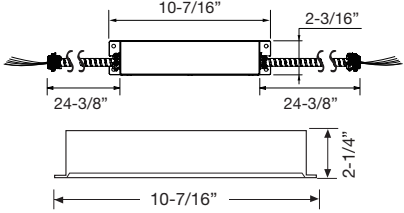
## ACCESSORY ORDERING INFORMATION

Product	Model	Description	Pictures	Dimensions
35157	SLFT/TRIM4/CC	4" Clear Trim Insert (Field Installation)		
98569	GOOFRING4	4" Goof Ring - Outer Diameter 8-1/8"		
35121	NCFJB4	New Construction Frame for T-Grid ceilings and stud/joist mounting		
35126	NCFBFB	Field Installable Butterfly Brackets For New Construction Frame		
35125	NCFEMB	Field Installable Emergency Bracket For New Construction Frame		
98501	NCPLATE/T4689	New Construction Plate for T-Grid ceilings		
98502	NCPLATE468	New Construction Plate for Stud/Joist ceilings		



# SELECTFIT 4" RETROFIT DOWNLIGHT

## ACCESSORY ORDERING INFORMATION

Product	Model	Description	Pictures	Dimensions
98583	NCPLATEJB	Junction box for New Construction Plates		
58012	35EMINVERTER	35W Emergency Inverter (Field Installation)		
58013	35EMINVERTER/CEC	California Title 20 Compliant 35W Emergency Inverter (Field Installation)		
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)		

## ORDERING GUIDE

Product	Model
98539	SLFT4/80CCTS/DIM120V
98540	SLFT4/80CCTS/DIM010UNV
98541	SLFT4/80CCT2750/DIM010UNV

## 10 YEAR EXTENDED WARRANTY

Model	SLFT4/10YEARWARRANTY

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.