

C-WP-A-ACWP Series

Cutoff Architectural LED Wall Pack w/ Integrated Photocell | Field Selectable CCT & Wattage
Replaces 250W MH/400W MH



VERSATILE, EFFICIENT AND COST-EFFECTIVE LIGHTING SOLUTION

The Cutoff Architectural LED Wall Pack is a game-changer in the world of lighting fixtures. It's UL Listed and FCC, RoHS and Prop65 Compliant. With its impressive array of features and benefits, it's the perfect choice for illuminating outdoor spaces with unparalleled efficiency. This wall pack provides minimal light pollution while still delivering maximum lighting performance. With its CCT and Wattage Selectable options, you have full control over the desired lighting ambiance, allowing you to tailor the lighting to your specific needs. Additionally, this LED Wall Pack is designed to replace up to 400W MH fixtures, providing substantial energy savings without compromising on light output. Say goodbye to outdated, energy-draining lighting solutions and hello to the Cutoff Architectural LED Wall Pack.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: Up to 16,700 Lumens
- CRI: ≥ 80
- Field selectable CCT options: 3000K, 4000K or 5000K
- Mounting height: Up to 25 feet
- Input Power: Field selectable wattage options: 20W, 30W, 40W, 50W, or 60W (**S9L**) or 80W, 90W, 100W, 110W, or 120W (**S17L**)
- Dimmable: 0-10V dimming to 10%
- Operating Temperature Range: -40°F to 104°F (-40°C to 40°C)
- Estimated L₇₀ Lifetime @ 25°C: > 100,000 hours
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load
- Limited Warranty: 5 Years*
- Replaces 250W MH/ 400W MH

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
<ul style="list-style-type: none"> • Integrated button photocell • 4kV Surge protection • Very efficient at a high 144 LPW (Lumens Per Watt) • FCC Part 15, Subpart B, Class B limits for conducted and radiated emissions 	<ul style="list-style-type: none"> • Security • Perimeter • Warehouses • Storefront Lighting 	<ul style="list-style-type: none"> • Universal (120V through 277V Operation)

ORDERING INFORMATION

Example SKU: C-WP-A-ACWP-S9L-SCCT-BZ

C-WP	A	ACWP		SCCT	BZ
PRODUCT	SERIES	STYLE	FIELD SELECTABLE WATTAGE*	FIELD SELECTABLE CCT	HOUSING COLOR
C-WP	A	ACWP Architectural Cutoff LED Wall Pack	S9L Up to 8675 (60W) S17L Up to 16,700 (120W)	SCCT Warm White (3000K) Neutral White (4000K*) Cool White (5000K)	BZ Bronze


*Default settings at time of shipping are highest product wattage and 4000K.

CERTIFICATIONS:




C-WP-A-ACWP Series

S9L

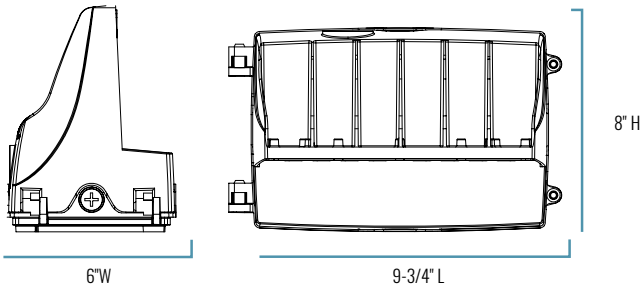

S17L

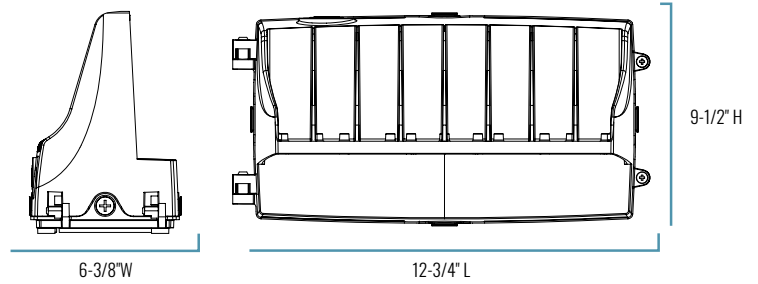

SERIES OVERVIEW

DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
9-3/4" L x 6" W x 8" H (S9L)	4.14 lbs.	10 to 15 feet	3-4 times the mounting height
12-3/4" L x 6-3/8" W x 9-1/2" H (S17L)	6.04 lbs.	15 to 25 feet	

FIXTURE SPECIFICATIONS

HOUSING	Bronze die cast aluminum housing with heat fins to dissipate heat and improve life of the product.
LENS ASSEMBLY	Integrated polycarbonate diffuser lens with individual optics for peak performance.
MOUNTING	Knockouts provided for mounting over a 3-1/2" or 4" octagonal or single gang junction box. Also comes with knockouts for mounting using conduit.

LUMINAIRE AND ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	ESTIMATED L ₇₀ LIFETIME @ 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION
-40°F to 104°F (-40°C to 40°C)	>100,000 Hours	> 0.9 at full load	< 20% at full load

WARRANTY AND CERTIFICATIONS

WARRANTY	cULus LISTED	DLC	DIMMABLE
5 Year Limited*	Wet Locations	5.1 Premium <small>Refer to https://www.designlights.org/search/ for most current information.</small>	0-10V dimming to 10%

C-WP-A-ACWP Series

LUMEN PACKAGE*	INITIAL DELIVERED LUMENS*				SYSTEM WATTS	CURRENT DRAW (AMPS)			
	4000K/5000K	BUG RATINGS	3000K	BUG RATINGS		120V	208V	240V	277V
S9L	8675	B2-U2-G1	8075	B2-U2-G1	60	0.50	0.29	0.25	0.22
	7250	B2-U2-G1	6725	B2-U2-G1	50	0.42	0.24	0.21	0.18
	6075	B2-U2-G1	5650	B2-U2-G1	40	0.33	0.19	0.17	0.14
	4920	B2-U2-G1	4575	B1-U2-G1	30	0.25	0.14	0.13	0.11
	3450	B1-U1-G1	3200	B1-U1-G1	20	0.17	0.10	0.08	0.07
S17L	16,700	B3-U3-G2	15,525	B3-U3-G2	120	1.00	0.58	0.50	0.43
	15,200	B3-U3-G2	14,100	B3-U3-G2	110	0.92	0.53	0.46	0.40
	14,050	B3-U3-G2	13,075	B3-U3-G2	100	0.83	0.48	0.42	0.36
	13,025	B3-U3-G2	12,100	B3-U3-G2	90	0.75	0.43	0.38	0.32
	11,650	B3-U3-G2	10,850	B3-U3-G2	80	0.67	0.38	0.33	0.29

* Default settings at time of shipping are highest product wattage and 4000K.

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>. Valid with no tilt

 **CA RESIDENTS WARNING:** Cancer and Reproductive Harm – www.p65warnings.ca.gov

© 2023 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. Due to continuous product improvement, information in this document is subject to change. The cULus logo is a registered trademark of UL LLC. The DLC QPL logo is a registered trademark of Efficiency Forward, Inc.

US: creelighting.com, e-conolight.com Distribution/Sales: 855-617-2733 Customer Services: 888-243-9445

Rev. Date: 09/07/2023

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING