

C-EE-A-EX-DF (Compact) Series

Compact LED Exit Sign with Battery Backup



THIS EMERGENCY LIGHT HAS YOUR BACK

Our C-Lite Compact LED Exit Sign comes ready for single/double face application, with your choice of red or green letters, in white housing. It's UL listed and features a 5-year limited warranty.



PRODUCT SPECIFICATIONS

OVERVIEW

- Input Power: 1W
- Finish Color: White
- Operating Temperature Range: 32°F to 122°F (0°C to 50°C)
- Battery Backup: Yes
- Limited Warranty: 5 Years*
- UL Listed
- 6" Letters: Red or Green
- Single/Double Face
- Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

| FEATURES | RECOMMENDED USE | INPUT VOLTAGE |
|--|--|--|
| <ul style="list-style-type: none"> • Standard exit sign look that's compact • Less power consumption than standard models • Flexible mounting options | <ul style="list-style-type: none"> • Exit identification • Indoor commercial, retail & industrial applications | <ul style="list-style-type: none"> • 120V or 277V Operation |

ORDERING INFORMATION


Example: C-EE-A-EX-DF-GRN-BB

| C-EE | A | EX | DF | | BB | [BLANK] |
|---------|--------|---------------------|--------------------------|--|----------------------|------------------|
| PRODUCT | SERIES | TYPE | FACE | COLOR | BATTERY BACKUP | HOUSING |
| C-EE | A | EX LED Exit Sign | DF Single/Double Face | GRN Green Letters RED Red Letters | BB Battery Backup | [Blank] White |

CERTIFICATIONS



C-EE-A-EX-DF Series

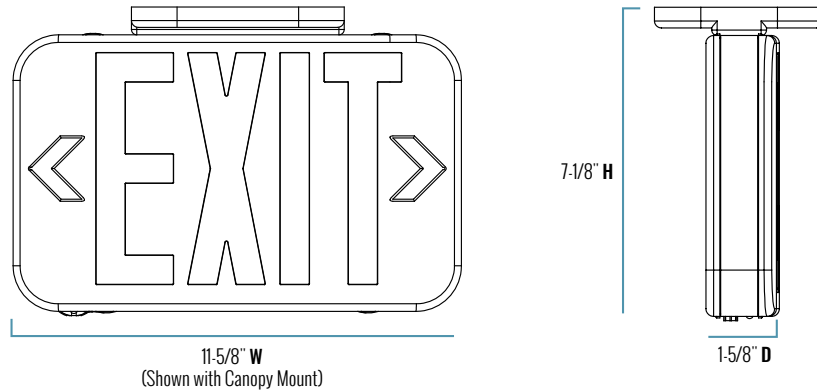

SERIES OVERVIEW

| DIMENSIONS | PRODUCT WEIGHT |
|---------------------------------|----------------|
| 1-5/8" D x 11-5/8" W x 7-1/8" H | 2.4 lbs. |

FIXTURE SPECIFICATIONS

| | |
|-----------------|---|
| HOUSING | White, injection-molded, 5VA flame retardant thermoplastic housing Easy to remove and replace chevrons |
| MOUNTING | Easy-snap mounting canopy included for top or end mounting Universal knockout pattern on back plate for wall mount Mounting hardware included |
| INCLUDES | Sealed 4.6V maintenance-free nickel cadmium battery backup (Minimum 90-minute emergency illumination) Charge/Power on indicator LED (battery recharges within 24 hours via internal solid-state, two-rate charger) Push-to-test switch (for manual-test option) |

ELECTRICAL PERFORMANCE

| OPERATING TEMPERATURE RANGE | | |
|-----------------------------|--------|--------|
| 32°F to 122°F (0°C to 50°C) | | |
| INPUT VOLTAGE | 120V | 277V |
| CURRENT DRAW (Amps): | 0.009A | 0.004A |

WARRANTY AND CERTIFICATIONS

| WARRANTY | UL LISTED |
|----------------|----------------|
| 5-Year Limited | Damp Locations |

CA RESIDENTS WARNING: Cancer and Reproductive Harm - www.p65warnings.ca.gov

©2021 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The UL logo is a registered trademark of UL LLC.

US: creelighting.com, e-conolight.com

Distribution/Sales: 855-617-2733 Customer Service: 888-243-9445

Rev. Date: 03/08/2021

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING