

C-EE-A-NYC-EMG Series

New York City-Approved Incandescent Emergency Lights



COUNT ON THIS DURING AN EMERGENCY

Our UL listed C-Lite Incandescent Emergency Light is New York City-Approved, delivers 150 lumens per head, and comes with a 5-year limited warranty. Choose between 2 or 3 adjustable heads.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 150 Lumens per head
- Finish Color: White
- Operating Temperature Range: 68°F to 122°F (20°C to 50°C)
- Limited Warranty: 5 Years*
- UL Listed
- Meets UL924, NFPA 101 Life Safety Code, NEC & OSHA codes

| FEATURES | RECOMMENDED USE | INPUT VOLTAGE |
|--|---|--|
| <ul style="list-style-type: none"> • New York City-Approved • Two 9W (18W and 27W versions) or 12W (50W version) incandescent heads with field-installable third head on the 27W and 50W versions • Battery backup • Remote Capable (50W version only) | <ul style="list-style-type: none"> • General purpose emergency lighting in New York City | <ul style="list-style-type: none"> • 120V or 277V Operation |

ORDERING INFORMATION

Example: C-EE-A-NYC-EMG-2L-18W-BB-WH

| C-EE | A | NYC | EMG | | | BB | WH |
|---------|--------|-------------------------------|------------------------|--|--|----------------------|---------------|
| PRODUCT | SERIES | CITY | EMERGENCY LIGHT | LUMEN PACKAGE | WATTAGE | BATTERY BACKUP | HOUSING COLOR |
| C-EE | A | NYC New York City-Approved | EMG Emergency Light | 2L 2 Heads, 18W 3L 3 Heads, 27W and 50W | 18W 18-watt (2L only) 27W 27-watt 50W 50-watt (3L only)* | BB Battery Backup | WH White |

*14W of remote capability for 50W version.




CERTIFICATIONS-




C-EE-A-NYC-EMG Series

C-EE-A-NYC-EMG-2L-18W-BB-WH

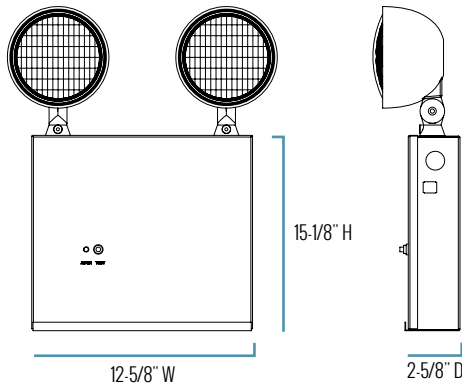

C-EE-A-NYC-EMG-3L-27W-BB-WH, C-EE-A-NYC-EMG-3L-50W-BB-WH

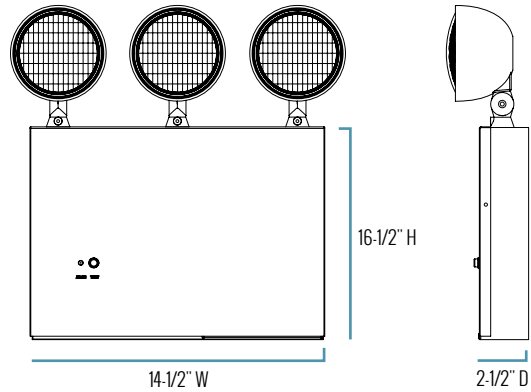

SERIES OVERVIEW

| DIMENSIONS | PRODUCT WEIGHT |
|---|----------------------------------|
| (C-EE-A-NYC-EMG-2L-18W-BB-WH) 12-5/8" W x 15-1/8" H x 2-5/8" D | 9.5 lbs. |
| (C-EE-A-NYC-EMG-3L-27W-BB-WH, C-EE-A-NYC-EMG-3L-50W-BB-WH) 14-1/2" W x 16-1/2" H x 2-1/2" D | 13 lbs. (27W) 18.4 lbs. (50W) |

FIXTURE SPECIFICATIONS

| | |
|----------------------|---|
| HOUSING | White powder-coated 20-gauge steel |
| LENS ASSEMBLY | UV stabilized polycarbonate lens |
| MOUNTING | Universal knockout pattern on back for wall mount Side and top knockouts for conduit feed applications |

ELECTRICAL PERFORMANCE

| OPERATING TEMPERATURE RANGE | SYSTEM WATTS (120V OR 277V) | CURRENT DRAW (AMPS) | |
|------------------------------|--------------------------------|---------------------|--------|
| | | 120V | 277V |
| 68°F to 122°F (20°C to 50°C) | 8W | 0.066A | 0.031A |
| | 15W | 0.14A | 0.065A |

| WARRANTY | UL LISTED |
|-----------------|---------------|
| 5 Year Limited* | Dry Locations |

© 2021 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-lite and the C-lite logo are registered trademarks of Cree Lighting. The UL logo is a registered trademark of UL LLC. The DLC QPL logo is a registered trademark of Efficiency Forward, Inc.

US- creelighting.com, e-conolight.com

Distribution/Sales- 855-617-2733 Customer Services- 888-243-9445

Rev. Date: 03/24/2021

For informational purposes only. Content is subject to change. *See lighting.cree.com/warranty for details

C-LITE
LED LIGHTING