

C-WM-A-WLMO Series

LED Wall Mount
Replaces 70W MH



GREAT THINGS COME IN SMALL PACKAGES

Simple to install, the WLMO Series LED Wall Mount features an integrated photocell that's been rigorously tested to withstand the test of time. The result? Maximum energy savings for your client, with the fixture automatically turning off and on, depending on light levels. Water-tight, the WLMO is also ideal for harsh environments, making it a versatile outdoor option. And, with a frosted lens designed to reduce glare, security levels increase tenfold.



PRODUCT SPECIFICATIONS

OVERVIEW

- Initial Delivered Lumens: 1750L
- CRI: ≥ 80 CRI
- CCT: Neutral White 4000K, Cool White 5000K
- Input Power: 15W LED
- Dimmable: No
- Operating Temperature Range: -40°F to 104°F (-40°C to 40°C)
- Estimated L₇₀ Lifetime @ 25°C: >50,000 Hours
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load
- Limited Warranty: 5-Years*
- Replaces 70W MH

FEATURES	BENEFITS	RECOMMENDED USE
<ul style="list-style-type: none"> • Comes standard with a photocell • Water tight; ideal for harsh environments 	<ul style="list-style-type: none"> • Super simple to install • Reliable photocell that will last the lifetime of the product • Due to the frosted lens, there's no glare 	<ul style="list-style-type: none"> • Security • Warehouse • Commercial • Perimeter

ORDERING INFORMATION

Example: C-WM-A-WLMO-17L-40K-UL-WH-P


PRODUCT	SERIES	STYLE	LUMEN PACKAGE	CCT	UL	COLOR	PHOTOCELL
C-WM	A	WLMO Wall Mount	17L 1700 Lumens (15W)	40K Neutral White (4000K) 50K Cool White (5000K)	UNIVERSAL VOLTAGE (120-277V)	WH White BZ Bronze	P

CA RESIDENTS WARNING: Cancer and Reproductive Harm – www.p65warnings.ca.gov

CERTIFICATIONS:



C-WM-A-WLMO Series

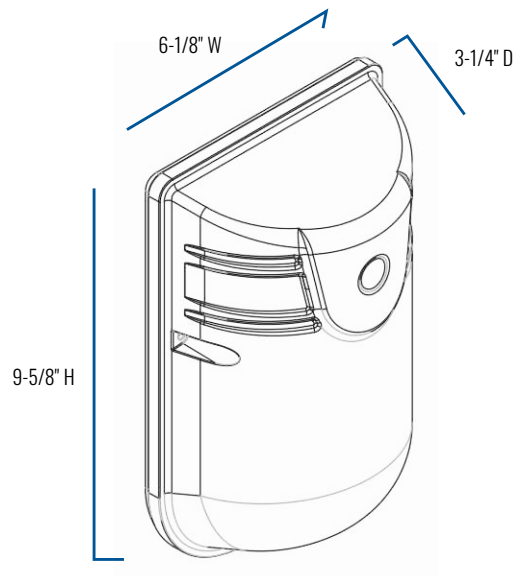

SERIES OVERVIEW

SKU	DIMENSIONS	PRODUCT WEIGHT
C-WM-A-WLMO-17L-40K-UL-WH-P	3 1/4" D x 6 1/8" W x 9 5/8" H	5.5 lbs.
C-WM-A-WLMO-17L-50K-UL-WH-P		
C-WM-A-WLMO-17L-40K-UL-BZ-P		
C-WM-A-WLMO-17L-50K-UL-BZ-P		

FIXTURE SPECIFICATIONS

HOUSING	White or bronze polyester powder-coat finish
LENS ASSEMBLY	Polycarbonate frosted lens
MOUNTING	Mounts directly to a 4" octagonal J-Box or a 3" square J-Box

ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	LIFESPAN L ₇₀ AT 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE
-40°F to 104°F (-40°C to 40°C)	Estimated >50,000 Hours	> 0.9 at full load	< 20% at full load	No

INPUT VOLTAGE	LUMEN PACKAGE	120V	208V	240V	277V
CURRENT DRAW (Amps)	17L	0.119A	0.069A	0.06A	0.052A

C-WM-A-WLMO Series

WARRANTY & CERTIFICATIONS

WARRANTY	cULus Listed	DLC
5-Year Limited*	Wet Locations	—

© 2023 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. C-Lite and the C-Lite logo are registered trademarks of Cree Lighting. The cULus logo is a registered trademark of UL LLC.

