

**Connected by** 



4" & 6", RGB + Tunable White, Wi-Fi, 800-1200 Lumens, 12-16W Recessed Downlighting

# **Features**

## Body

Durable airtight aluminum body with UV stable paint and white PMMA diffuser lens for low glare. Includes silicone gasket for wet location applications. Includes White interchangeable magnetic trim.

## **LED Characteristics**

This general application light fixture features a 12 watt (for 4") and 16 watt (for 6") LED module that maintains uniform intensity producing up to 1200 lumens; with a typical CRI of 90. RGB and Tunable White (2700 K ~ 5000 K).

## Dimming

100%-4% Wi-Fi dimming capability. Dimming controlled via the WiZ App and Room Controller.

## **Beam Spread**

The fixture lens provides 110° beam spread.

## Mounting

Includes two spring loaded clips to attached to any ceiling material.

## I FD Driver

Extruded aluminum hardwire box with 300mA (for 4") or 370mA (for 6") Wi-Fi dimmable LED driver with 100-135V AC input. Includes an 18" wire with 6-Pin DC connector between driver and fixture.

## WiZ App

Can be controlled via the WiZ App (works with iOS and Android) from anywhere. Voice control can also be achieved by integrating the app with most smart speakers. Works with Google Assistant, Siri, Alexa and IFTTT.

#### **Quick Connect push-in**

terminals "Quick connect" push-in terminals in hardwire box for fast and easy wiring

#### **Minimum Starting Temperature** -40°C (-40°F)

# Environment

- Suitable for wet locations.
- Approved for direct contact with insulation
- Suitable for indoor/outdoor applications
- Airtiaht

## QuickShip In-Stock


In-Stock products ship within two business days of an order being released.\*

SPECIFICATION		
Application	Ceiling Recess Mount	
Approved Location	Wet / Insulated Ceilings / Indoor / Outdoor	
Beam Angle	110°	
ССТ	RGB + Tunable White (2700 K - 5000 K)	
Certification	cETLus	
Class II	Yes	
Color	WH	
CRI	90	
Dimming	Yes	
Dimming Tech	Wi-Fi Dimming (via WiZ App)	
Hole Cut	4": Ø 4¼" (108mm) 6": Ø 6¼" (159mm)	
Input	100-135V AC, 60Hz	
Lumens	4": up to 800 6": up to 1200	
Lumens per Watt	Up to 76	
Power Factor	>0.9	
Projected Life	70% @ 50,000 hrs	
Warranty	3-Year	
Wattage	12W / 16W	




# Description

SLIMLED OnCloud is a slim profile high-performance, easy to install residential grade downlight solution that offers good light output, energy-efficiency and streamlined design with interchangeable color trims. Suitable for wet locations.

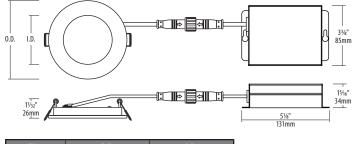

Size	0.D.	I.D.
SLM4	413/16" (122mm)	3" (76mm)
SLM6	613/16" (173mm)	413/16" (123mm)

# **Ordering Guide**



\* QuickShip lead time may vary for orders greater than 100 pieces. No additional shipment rates apply. Subject to availability.

Liteline Corporation Copyright © 2023 All rights reserved.

Telephone 416.996.1856 1.866.730.7704 Fax 905.709.5255 1.888.738.9736



Notes: Accessories are sold separately. For additional options please consult your Liteline representative.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

# LITELINE.COM

Job Information			
Project Name		Туре	
Location			
Quantity		Date	
Contact/Phone			
Notes			

Accessories

SLM4-12W-RT-BN Faceplate for SLM4-12W-CCT, round, brushed nickel.

SLM4-12W-RT-OB Faceplate for SLM4-12W-CCT, round, oil rubbed bronze.

SLM4-12W-RT-SL Faceplate for SLM4-12W-CCT, round, silver.

SLM4-12W-RT-BK Faceplate for SLM4-12W-CCT, round, black.

SLM4-12W-ST-BK Faceplate for SLM4S-12W-CCT, square, black.

SLM4-12W-ST-BN Faceplate for SLM4S-12W-CCT, square, brushed nickel.

SLM4-12W-ST-OB Faceplate for SLM4S-12W-CCT, square, oil rubbed bronze.

SLM4-12W-ST-SL Faceplate for SLM4S-12W-CCT, square, silver.

P-4020 4¼" Round pre-mounting plate with driver attachment clip, for 4" SlimLED fixtures.

SLM4P-XLRING-BK Extra large trim ring for 4" round SlimLED PLUS, metal, black.

SLM4P-XLRING-BN Extra large trim ring for 4" round SlimLED PLUS, metal, brushed nickel.

SLM4P-XLRING-WH Extra large trim ring for 4" round SlimLED PLUS, metal, white.













P-6020 6¼" Round pre-mounting plate with driver attachment clip, for 6" SlimLED fixtures.

Extra large trim ring for 6" round

Extra large trim ring for 6" round

SlimLED PLUS, metal, black.

SLM6P-XLRING-BK

SLM6P-XLRING-BN

SLM6-16W-RT-BN

SLM6-16W-RT-OB

SLM6-16W-RT-BK

SLM6-16W-ST-BK

SLM6-16W-ST-BN

SLM6-16W-ST-OB

oil rubbed bronze.

Faceplate for SLM6-16W-CCT,

Faceplate for SLM6S-16W-CCT,

Faceplate for SLM6S-16W-CCT, square,

Faceplate for SLM6S-16W-CCT, square,

brushed nickel.

rubbed bronze.

round, oil black.

square, black.

brushed nickel.

Faceplate for SLM6-16W-CCT, round,

Faceplate for SLM6-16W-CCT, round, oil





SLM6P-XLRING-WH Extra large trim ring for 6" round SlimLED PLUS, metal, white.


SlimLED PLUS, metal, brushed nickel.



P-NCMK-1 Hanger bar kit. Includes hanger bars, brackets and screws.

VBE-1 Vapour barrier extender. For use in new construction applications.





VBE-2

Vapour barrier extender. For use in remodel applications.

Vapour barrier extender. For use in

VBE-5 Vapour barrier extender. For use in new construction applications.

## LC-CRTL-SCENE-1

OnCloud Room Controller, Wi-Fi, ON/OFF, CCT, Dimming and favourite scenes.